
Model	463.210
Model	463.260/261
Model	463.276/277
Model	463.349/350

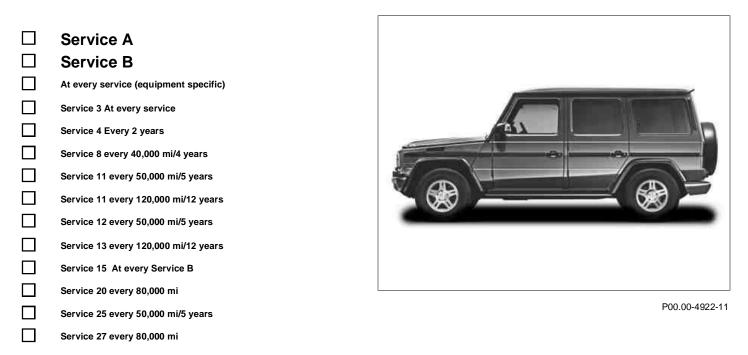

Customer	Order number	
VIN/license plate number	Current mileage	
Service code	Workshop code	
Remaining distance	Remaining time	
Oil type/viscosity	Completion time/date	
Service consultation performed at vehicle	Yes	No
Notes/explanations		
The following activities are hereby confirmed: - Completion of relevant service operations		

Signature\_\_\_\_\_

Α	В	Inp	ut condition not OK:	
Comp	leted			
X	$\mathbf{X}$			
-	-		₹	
		Service reception The reception report for service on the vehicle is available in completed form.	O	
© Daimle	r AG, 9/25/24	I, L/10/20, ap00.20-p-1240ak, OVERVIEW for service sheet, USA		Page 1 of 5

Model 463.210 Model 463.260/261 Model 463.276/277 Model 463.349/350

					AP00.20-P-0009Z
			i To be performed by the Service		
			Advisor (where market-specific conditions require).		
			Fully process all acceptance items		
			and the maintenance items listed in the service sheet, only then is the		
			service scope completely performed.		
		Brake system		_	
		Perform brake test and enter result in table.		0	
			As of model year 2019		AP42.00-P-4290BA
		Vehicle exterior			
		Check exterior lighting for proper operation.		$\bigcirc$	
				U	
	_	Check function of headlamp range		$\frown$	AP82.10-P-8252EW
		adjustment.		0	
			Vehicles with dynamic LED		
			headlamps or with the headlamp range adjuster on the exterior lights		
			switch.		
				_	AP82.10-P-8250EW
		Check and correct headlamp adjustment.		0	
			As of model year 2019		AP82.10-P-8260GA
			i For vehicles with dynamic LED		
			headlamps, invoice adjustment of		
		Vahiala interior	headlamps as additional operation.		
	_	Vehicle interior Check windshield wipers, windshield washer		$\bigcirc$	
		system and headlamp cleaning system for		0	
		proper operation.	As af madel was 2010		
_	_	Check lamps in instrument cluster and	As of model year 2019	$\sim$	AP82.30-P-8252GA
		interior lighting for proper operation.		0	
			As of model year 2019		AP54.30-P-5453G
		Check first-aid kit (soft sided).		0	
				-	AP68.00-P-6850EW
			<b>i</b> Enter expiration date here:		/ 00.00 1 0000EW
			i Replace first aid bag, invoice as		
	_	Replace activated charcoal particle filter.	an additional operation.		
			As of model year 2019		AP83.00-P-8350GA
		Trunk			
		Check trunk lighting for proper operation.		0	
		Body			
		Lubricate door locks.			
			As of model year 2010		
		Engine compartment	As of model year 2019		AP72.00-P-7221GA
		Hood: Check latch and safety hook for ease		$\bigcirc$	
		of movement.		$\cup$	
			As of model year 2019		AP88.40-P-8851GA
		Clean water drain.			
			As of model year 2019		AP82.35-P-8232G
		Brake system: Check fluid level.	-	$\bigcirc$	
				$\bigcirc$	
		Chack air flan in anaine associate	As of model year 2019	$\sim$	AP42.10-P-4210GA
		Check air flap in engine compartment.		$\bigcirc$	
			Engine 176		AP20.00-P-2052GA
			Engine 177		AP20.00-P-2052D
		Windshield washer system: Check/correct fluid level.			
		וונוע ובעבו.	As of model year 2019		AP82.35-P-8210GA
					71 02.00-1-02100A

© Daimler AG, 9/25/24, L/10/20, ap00.20-p-1240ak, OVERVIEW for service sheet, USA Model 463.210 Model 463.260/261 Model 463.276/277 Model 463.349/350

		<b>U</b> When using cleaning compounds for summer/winter, and depending on the ambient temperature, observe the mixing ratio.	$\sim$	
		Engine 176, 177	0	
	Check all visible parts in upper area of		0	AP20.30-P-2052F
	loss.	As of model year 2019	•	AP00.20-P-0055GA
	Check all visible parts in engine compartment for damage and fluid loss.	t	0	AI 00.201 00000A
	Replace dust filter.	As of model year 2019		AP00.20-P-0055GA
	Check poly-V-belt in visible area for signs of	As of model year 2019	$\sim$	AP83.00-P-8381GX
	wear.	Engine 264, 656	0	
	Underside of vehicle			AP13.22-P-1352EW
	Check visible area of poly-V-belts for wear.		0	
		Engine 176, 177		
	Check all visible parts of vehicle underside		0	AP13.22-P-1352B
		As of model year 2019	•	AP00.20-P-0054GA
		<b>i</b> The country-specific regulations for mobility and body shell complaints apply.		
	Check condition of steering and tie rods.		0	
_	Check condition of front axle and front axle	As of model year 2019	$\sim$	AP46.00-P-4651GA
	joints.	As of model year 2019	0	AP33.10-P-3358GA
	Check condition of propeller shafts.		0	AF 35.101-33300A
	Check condition of rear axle and rear axle	As of model year 2019	•	AP41.10-P-4154GA
	ball joints.	As of model year 2010	0	
	Check condition of suspension struts or	As of model year 2019	0	AP35.20-P-3552GA
		As of model year 2019	•	AP32.25-P-3255GA
	Check tires for damage and crack formation, and enter result in table.		0	
	Tires	As of model year 2019		AP40.10-P-4051EW
	Correct tire pressure and enter set tire pressure in table.		0	
	Check/correct spare wheel tire pressure and	As of model year 2019	$\frown$	AP40.15-P-4061A
	enter set tire pressure in table.	As of model year 2019	0	AP40.15-P-4061A
	Vehicle interior			AF 40. 13-F -400 TA
	At every service (equipment specific) Replace battery for KEYLESS-GO key.			
		After consultation with customer.		
	External refueling At every service (equipment specific)			
	AdBlue® container: Top up fluid level.			
		After consultation with customer. With code (M020) BLUETEC		AP49.20-P-0100A
	Engine compartment			7.1 TO.20 1 TOTOM

Image: Constraint of the second se			Service 3 At every service		
Image: Section of the section of t			Engine: Change oil and oil filter.		
Engine 177     APPE.00-P-01030       Engine 204     APE.00-P-01030       Engine 356     APE.00-P-01030       Brink struke 1 Every 2983     Brink struke 1 Every 2983       Brink struke 1 Every 2983     Brink struke 1 Every 2983       Brink struke 1 Every 2983     APE.00-P-01030       As of model year 2013     APE.200-P-42800A       As of model year 2013     APE.200-P-42800A       Brink struke 2013     APE.200-P-42800A       As of model year 2013     APE.200-P-42800A       Engine 176     APE.200-P-42800A       Engine 2013     APE.200-P-42800A       Engine 2013     APE.200-P-42800A       Engine 2013     APE.200-P-42800A       Engine 2014     APE.200-P-42800A       Engine 2015     APE.200-P-42800A       APE.200-P-4280A     APE.200-P-4280A       Bernice 11 filter.     Engine 176, 177       APE.200-P-2080A     APE.200-P-2080A       APE.200-P-2080A <td></td> <td></td> <td></td> <td></td> <td>AP18 00-P-0101GF</td>					AP18 00-P-0101GF
Image: Section of the section of t					
Image: Service 3 Engine compartment       As of model year 2019       AP42.00-P-4200CA         Image: Service 3 Every 3 years       Brake system: Replace brake fluid.       As of model year 2019       AP42.00-P-4200CA         Image: Service 3 Every 3 years       Replace ari fiber element.       Engine 170       AP00.10-P-0600K         Image: Service 3 Every 3 years       Replace ari fiber element.       Engine 170       AP00.10-P-0600K         Image: Service 3 Every 3 years       Replace fuel fiber.       Image: Service 3 Every 3 years       Replace 566       AP07.10-P-0600K         Image: Service 3 Inter element.       Engine 656       AP07.10-P-0600K       AP09.10-P-0600K         Image: Service 3 Inter element.       Engine 656       AP07.20-P-07800XA         Image: Service 3 Inter element.       Engine 656       AP07.20-P-07800XA         Image: Service 3 Inter element.       Engine 656       AP07.20-P-07800XA         Image: Service 3 Inter element.       Engine 176.177       AP15.10-P-15800KCU         Image: Service 3 Inter element.       Engine 176.177       AP20.00-P-2082CA				-	
Brive sparse       Brive sparse         Brive system: Replace brack fluid.       As of model year 2019         As of model year 2019       AP42.00-P42805A         Brive system: Replace brack fluid.       Engine 178         Brive system: Replace air filter element.       Engine 178         Brive system: Replace air filter element.       Engine 178         Brive system: Replace air filter element.       Engine 178         Brive system: Replace full filter.       Engine 556         Brive system: Replace full filter.       Engine 176.177.264         Brive system: Replace full filter.       Engine 176.177.264         Brive system: Replace spark plugs.       Engine 176.177         Brive system: Replace colart in main circuit.       Engine 176.177         Brive system: System System: Replace colart in main circuit.       Engine 176.177         Brive System: System: System System: Brive System: Brive System: Brive System: Brive System: Brive System:					
Image: Series Control of					
Image: Contract of the second seco					
Image: Service 30 every 40,000 mill years       AP03.0-P.0801         Engine 176       AP03.10-P.0801         Engine 177       AP03.10-P.0801         Engine 177       AP03.10-P.0801         Engine 177       AP03.10-P.0801         Engine 177       AP03.10-P.0801         Engine 224       AP03.10-P.0801         Service 11 every 50.000 milly years       Engine 656         Replace 1ut littler.       Engine 176.177.264         Image: Service 11 every 50.000 milly years       Replace 1ut littler.         Engine 176.177.264       AP47.20-P.0780CKA         Service 12 every 50.000 milly years       Replace 12 every 50.000 milly years         Replace fuel littler.       Engine 176.177.264       AP47.20-P.0780CKA         Engine 176.177.264       AP47.20-P.0780CKA       Engine 176.177.264       AP47.20-P.0780CKA         Service 12 every 50.000 milly years       Replace spark, plugs.       Engine 176.177.264.606       AP42.00-P.2082GA         Image: 13 every 120,000 milly years       Replace colant In main circuit.       Engine 176.177.264.606       AP20.00-P.2082GA         Image: 13 every 120,000 milly years       Replace colant In main circuit.       Engine 176.177.264.606       AP20.00-P.2082GA         Image: 13 every 120,000 milly years       Replace colant In main circuit.       Engine 176.177.264.606			Brake system: Replace brake fluid.		
Image: Service 30 every 40,000 mill years       Engine 176       AP06.10-P.0801         Engine 177       AP06.10-P.0801         Engine 177       AP06.10-P.0900         Engine 224       AP08.10-P.09001         Service 31 every 50,000 milly years       Engine 176         Replace fuel filter.       Engine 176         Image: 11 every 50,000 milly years       Engine 176         Replace fuel filter.       Engine 176, 177, 264         Image: 126 every 50,000 milly years       Replace fuel filter.         Engine 176, 177, 264       AP47.20-P.0780C8A         Replace fuel filter.       Engine 176, 177, 264         AP47.20-P.0780C8A       Engine 176, 177, 264         AP47.20-P.0780C8       Engine 176, 177         AP15.10-P-1580C       Engine 176, 177, 264         AP47.20-P.0780C8       Engine 176, 177, 264         AP47.20-P.0780C8       Engine 176, 177, 264         AP47.20-P.0780C8       Engine 176, 177, 264, 656         AP20.00-P-2082C       Engine 176, 177, 264, 656         AP20.00-P-2082C       Engine 176, 177, 264, 656         AP40.00-P-2082C       E				As of model year 2019	AD 43 00 D 4380CA
Service 8 very 40,000 mild year         Replace air filter element.         Engine 176       AP09.10-P-0980X         Engine 177       AP09.10-P-0980X         Engine 656       AP09.10-P-0980X         Service 10 every 50.000 mil5 years       Replace fuel filter.         Image: Service 11 every 50.000 mil5 years       Replace fuel filter.         Image: Service 11 every 50.000 mil5 years       Replace fuel filter.         Image: Service 11 every 50.000 mil5 years       Replace fuel filter.         Image: Service 11 every 120.000 mil5 years       Replace fuel filter.         Image: Service 11 every 120.000 mil5 years       Replace fuel filter.         Image: Service 12 every 50.000 mil5 years       Replace fuel filter.         Image: Service 12 every 50.000 mil5 years       Replace fuel filter.         Image: Service 12 every 50.000 mil5 years       Replace spark plugs.         Image: Service 12 every 50.000 mil5 years       Replace spark plugs.         Replace odant in main circuit.       Engine 176, 177, 264       AP15.10-P-1580/CU         Image: Service 13 every 120.000 mil7 years       Replace codant.       Engine 176, 177, 264, 656       AP20.00-P-2082CA         Image: Service 13 every 100.000 mil7 years       Replace codant.       Engine 176, 177, 264, 656       AP20.00-P-2082CA         Image: Service 13 every 100.000 mil7 years			Engine compartment	As of model year 2019	AP42.00-P-4280GA
Image: Constraint of the service of			Service 8 every 40,000 mi/4 years		
Engine 176     AP09.10-P-080X       Engine 284     AP09.10-P-080X       Engine 284     AP09.10-P-080X       AP09.10-P-080X     AP09.10-P-080X       Replace 10 lifter.     Engine 656       Image: Service 11 every 30,000 mil/3 years     AP47.20-P-0780GXA       Image: Service 11 every 30,000 mil/3 years     Engine 656       AP47.20-P-0780GXA     AP47.20-P-0780GXA       Image: Service 11 every 30,000 mil/3 years     Engine 176, 177, 284       Replace fuel filter.     Engine 176, 177       Image: Service 12 every 30,000 mil/3 years     Engine 176, 177       Replace spark plugs.     Engine 176, 177       Image: Service 13 every 120,000 mil/3 years     Engine 176, 177       Replace colant in main circuit.     Engine 176, 177       Image: Service 13 every 120,000 mil/3 years     Replace colant in main circuit.       Image: Service 13 every 120,000 mil/3 years     Engine 176, 177, 284, 656       Image: Service 13 every 120,000 mil/3 years     Engine 176, 177       Service 15 Avery Service 8     Engine 176, 177       Service 15 Avery Service 8 </td <td></td> <td></td> <td>Replace air filter element.</td> <td></td> <td></td>			Replace air filter element.		
Image: Service 11 area visual of a service 11 area visual of a vehicle service 12 area visual of a vehicle service 11 area visual of a vehicle service 12 area visual of a vehicle service 13 are					
Image: Service 13 every 30:000 mi3 years       Engine 264       AP09:10-P-098001         Image: Service 11 every 30:000 mi3 years       Replace fuel filter.       Engine 656         Image: Service 11 every 30:000 mi3 years       Replace fuel filter.       AP47:20-P-0780GXA         Image: Service 11 every 30:000 mi3 years       Replace fuel filter.       AP47:20-P-0780GXA         Image: Service 11 every 30:000 mi3 years       Replace fuel filter.       AP47:20-P-0780GXA         Image: Service 11 every 30:000 mi3 years       Replace fuel filter.       AP47:20-P-0780GXA         Image: Service 13 every 30:000 mi3 years       Replace fuel filter.       AP47:20-P-0780GXA         Image: Service 13 every 30:000 mi3 years       Replace for 2 every 50:000 mi3 years       Replace for 2 every 50:000 mi3 years         Replace 5 gerif in 2 every 50:000 mi3 years       Replace for 2 every 50:000 mi3 years       Replace 5 every 50:000 mi3 years         Image: 12 every 50:000 mi3 years       Replace for 2 every 50:000 mi3 years       Replace 5 every 50:000 mi3 years         Replace 10 everterior       Replace for 4 everterior       Engine 176, 177       AP20:00-P-2082G         Image: 12 everterior       Service 13 every 50:000 mi3       Mind code 025 (Trailer coupling with balh head) or with code 025 (Trailer coupling with balh head) or with code 025 (Trailer coupling with balh head) or with code 025 (Trailer coupling with balh head) or with code 025 (Trailer coupling with balh head) or with code					
Image: Service 11 overy \$0,000 mil5 years       Engine 656       AP00.10-P-0980.1         Image: Service 11 overy \$0,000 mil5 years       Replace fuel filter.       Engine 658       AP47.20-P-0780GXA         Image: Service 11 overy \$0,000 mil5 years       Replace fuel filter.       Engine 658       AP47.20-P-0780GXA         Image: Service 11 overy \$0,000 mil7 years       Replace fuel filter.       Engine 176, 177, 284       AP47.20-P-0780G8         Image: Service 12 overy \$0,000 mil7 years       Replace spark plugs.       Engine 176, 177       AP15.10-P-1580C         Image: Service 13 overy 120,000 mil7 years       Replace fuel filter.       Engine 176, 177       AP15.10-P-1580C         Image: Service 13 overy 120,000 mil7 years       Replace fuel filter.       Engine 176, 177       AP15.10-P-1580C         Image: Service 13 overy 120,000 mil7 years       Replace fuel filter.       Engine 176, 177       AP15.10-P-1580C         Image: Service 13 overy 120,000 mil7 years       Replace fuel filter.       Engine 176, 177       AP15.00-P-2082GA         Image: Service 13 overy 120,000 mil7 years       Replace fuel filter.       Engine 176, 177       AP20.00-P-2082GA         Image: Service 15 At overy 120,000 mil7 years       Service 15 At overy 120,000 mil7 years       Engine 176, 177       AP20.00-P-2083C         Image: Service 25 overy 90,000 mil       Atomatic transmission: Charge oil and oil filter.       <					
Image: Service 11 wery 50,000 ml/s years         Replace fuel filter.         Image: Service 11 wery 50,000 ml/s years         Replace fuel filter.         Image: Service 11 wery 50,000 ml/s years         Replace fuel filter.         Image: Service 11 wery 50,000 ml/s years         Replace fuel filter.         Image: Service 11 wery 50,000 ml/s years         Replace fuel filter.         Image: Service 11 wery 50,000 ml/s years         Replace spark plugs.         Image: Service 13 wery 120,000 ml/s years         Replace contain in main circuit.         Replace contain in main circuit.         Replace contain in main circuit.         Replace low-temperature circuit coolant.         Engine 176, 177, 264, 655         AP20.00-P-2082GA         AP20.00-P-2082GA         Period 12 wery 50,000 ml/s years         Replace contain in main circuit.         Engine 176, 177, 264, 655         AP20.00-P-2082GA         Meriod 2 wery 50,000 ml/s years         Fingine 176, 177, 264, 655         AP20.00-P-2082GA         Period 2 wery 50,000 ml/s years         Trailer hich: Check condition and operation.         With code Q55 (Trailer coupling with ball head) or with code Q59 (Trailer coupling with ball head) or with code Q59 (Trailer coupling with ball head) or					
Service 11 every 50,000 mil/s years         Replace fuel filter.         Engine 656         AP47.20-P-07800XA         Image: Service 11 every 120,000 mil/s years         Replace fuel filter.         Engine 176, 177, 264         Replace fuel filter.         Engine 176, 177, 264         AP47.20-P-07800CB         Replace fuel filter.         Engine 176, 177, 264         AP47.20-P-07800CB         Replace fuel filter.         Engine 176, 177, 264         AP47.20-P-07800CB         Replace spark plugs.         Engine 176, 177         AP15.10-P-15800CCD         Engine 176, 177         AP15.10-P-15800CCD         Underside of vehicle         Service 13 every 120,000 mil/s years         Replace low-temperature circuit coolant.         Engine 176, 177, 264, 656         AP20.00-P-2082CA         Vehicle exterior         Service 13 every 120,000 mil/s years         Forgine 176, 177         AP20.00-P-2082CA         Vehicle exterior         Service 20 every 80,000 mil         With code Q55 (Trailer coupling with ball head) or with code Q59 (Trailer coupling with ball head) or with code Q59 (Trailer coupling with ball head) or with code Q59 (Trailer coupling with ball head) or with			Underside of vehicle	Engine 656	AP09.10-P-0980J
Replace fuel filler.       Engine 656       AP47.20-P-0780GXA         Image: Service 11 every 120.000 mil/2 years       Replace fuel filter.       Engine 176, 177, 264       AP47.20-P-0780GB         Image: Service 11 every 120.000 mil/2 years       Replace fuel filter.       Engine 176, 177, 264       AP47.20-P-0780GB         Image: Service 12 every 50.000 mil/2 years       Replace fuel filter.       AP47.20-P-0780GB         Image: Service 12 every 50.000 mil/2 years       Replace fuel filter.       AP47.20-P-0780GB         Image: Service 13 every 50.000 mil/2 years       Replace fuel filter.       AP47.20-P-0780GB         Image: Service 13 every 50.000 mil/2 years       Replace coolant in main circuit.       Engine 176, 177, 264, 656       AP20.00-P-2082GA         Image: Service 13 every 120.000 mil/2 years       Replace coolant in main circuit.       Engine 176, 177, 264, 656       AP20.00-P-2082GA         Image: Service 13 every 120.000 mil/2 years       Replace low-temperature circuit coolant.       Engine 176, 177       AP20.00-P-2082GA         Image: Service 13 every 120.000 mil/2 years       Trailer hitch: Check condition and operation.       O       AP20.00-P-2083C         Image: Service 13 every 80.000 mil/2 years       Trailer hitch: Check condition and operation.       O       AP31.11-P-3152GA         Image: Service 20 every 80.000 mil/2 years       Trailer hitch: Check condition and operation.       O <t< td=""><td></td><td></td><td></td><td></td><td></td></t<>					
Image: Service 11 every 120,000 ml/12 years       Engine 666       AP47.20-P-0780GXA         Image: Service 11 every 120,000 ml/12 years       Replace luel filter.       Engine 176, 177, 264       AP47.20-P-0780GB         Image: Service 12 every 50,000 ml/5 years       Replace fuel filter.       Engine 176, 177, 264       AP47.20-P-0780GB         Image: Service 12 every 50,000 ml/5 years       Replace spark plugs.       Engine 176, 177       AP45.10-P-1580KCU         Image: Service 12 every 50,000 ml/12 years       Replace spark plugs.       Engine 176, 177       AP45.10-P-1580KCU         Image: Service 13 every 120,000 ml/12 years       Replace coolant in main circuit.       Engine 176, 177, 264, 656       AP20.00-P-2082GA         Image: Service 13 every 120,000 ml/12 years       Replace low-temperature circuit coolant.       Engine 176, 177       AP45.00-P-2082GA         Image: Service 13 every 120,000 ml/12 years       Replace low-temperature circuit coolant.       Engine 176, 177       AP20.00-P-2083C         Image: Service 15 every 60,000 ml/12 years       Trailer hitch: Check condition and operation.       O       O         Image: Service 26 every 60,000 ml/12 years       Front axie differential: Change oil and oil filter.       Transmission 725.0       AP27.00-P-27020A         Image: Service 20 every 60,000 ml/12 years       Front axie differential: Change oil.       As of model year 2019       AP33.0-P-33.01GA					
Image: Contract of the service of t					
Underside of vehicle       Service 11 every 120,000 mi/12 years         Replace fuel filter.       Engine 176, 177, 264         Engine 176, 177, 264       AP47,20-P-0780GB         Service 12 every 50,000 mi/5 years       Engine 176, 177         Replace spark plugs.       Engine 176, 177         Underside of vehicle       Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.       Engine 176, 177, 264, 656         Replace coolant in main circuit.       Engine 176, 177, 264, 656         Replace coolant in main circuit.       Engine 176, 177         Replace low-temperature circuit coolant.       Engine 176, 177         Replace low-temperature circuit coolant.       Engine 176, 177         Vehicle exterior       Service 15 At every Service 8         Trailer hitch: Check condition and operation.       O         With code 056 (Trailer coupling with ball head) or with code 056 (Trailer coupling with ball head) or with code 056 (Trailer coupling with ball head) or with code 056 (Trailer coupling with ball head) or with code 056 (Trailer coupling with ball head) or with code 056 (Trailer coupling with ball with code 040 (Trailer coupling with coupling with ball head) or with code 056 (Trailer coupling with coupling wi				Engine 656	
Service 11 every 120,000 mi/12 years         Replace fuel filter.         Engine 176, 177, 264       AP47.20-P-0780GB         Engine 176, 177, 264       AP47.20-P-0780GB         Service 12 every 50,000 mi/5 years       Engine 176, 177         Replace spark plugs.       Engine 176, 177         Engine 176, 177       AP15.10-P-15800         Engine 176, 177       AP15.10-P-15800         Underside of vehicle       Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.       Engine 176, 177, 264, 656         Engine 176, 177, 264, 656       AP20.00-P-2082CA         Engine 176, 177       AP20.00-P-2083C         Vehicle exterior       Engine 176, 177         Service 15 At every Service B       Trailer Thitch: Check condition and operation.         Vehicle exterior       Service 15 At every Service B         Trailer hitch: Check condition and operation.       O         With code 0255 (Trailer coupling with bala)       AP31.11-P-31520A         With code 0255 (Trailer coupling with bala)       AP27.00-P-2702CA         Image: Service 20 every 80,000 mi       Transmission 725.0         AP27.00-P-2702CA       Ap35.00-P-23001GA         Image: Anternal differential: Change oil.       As of model year 2019         Ap33.00-P-3301GA       Ap35.00-P-3501GA     <					AP47.20-P-0780GXA
Image: Constraint of the constraint					
Image: Service 12 every 50,000 mi5 years       Engine 176, 177, 264       AP47.20-P-0780CB         Image: Service 12 every 50,000 mi5 years       Replace spark plugs.       Image: Service 12 every 50,000 mi5 years         Image: Service 12 every 50,000 mi5 years       Engine 176, 177       AP15.10-P-15800CU         Image: Service 13 every 120,000 mi/12 years       Replace coolant in main circuit.       Image: AP15.10-P-15800CU         Image: Service 13 every 120,000 mi/12 years       Replace coolant in main circuit.       Image: AP20.00-P-2082GA         Image: Service 13 every 120,000 mi/12 years       Replace coolant in main circuit.       Image: AP20.00-P-2082GA         Image: Service 13 every 120,000 mi/12 years       Replace coolant in main circuit.       Image: AP20.00-P-2082GA         Image: Service 13 every 120,000 mi/12 years       Replace low-temperature circuit coolant.       Image: AP20.00-P-2083C         Image: Service 13 every 120,000 mi/12 years       Replace low-temperature circuit coolant.       Image: AP20.00-P-2083C         Image: Service 13 every 120,000 mi/12 years       Replace low-temperature circuit coolant.       Image: AP20.00-P-2083C         Image: Service 13 every 120 mi / Ap30.00-P-3001GA       AP20.00-P-2083C       AP31.11-P-3152GA         Image: AP31.11-P-3152GA       Service 20 every 80,000 mi       Image: AP31.11-P-3152GA         Image: AP31.11-P-3152GA       Service 20 every 80,000 mi       AP27.00-P-2702GA					
Image: Service 12 every 50,000 mi/5 years         Replace spark plugs.         Image: Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.         Image: Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.         Image: Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.         Image: Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.         Image: Service 13 every 120,000 mi/12 years         Replace low-temperature circuit coolant.         Image: Service 15 At every Service B         Trailer hitch: Check condition and operation.         Image: Service 15 At every 80,000 mi         Vehicle exterior         Service 20 every 80,000 mi         Automatic transmission: Change oil and oil filter.         Image: Service 20 every 80,000 mi         Automatic transmission: Change oil and oil filter.         Image: Service 25 every 50,000 mi/5 years         Front axle differential: Change oil.         Area:			Replace fuel filter.		
Image: Service 12 every 50,000 mi/5 years         Replace spark plugs.         Image: Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.         Image: Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.         Image: Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.         Image: Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.         Image: Service 13 every 120,000 mi/12 years         Replace low-temperature circuit coolant.         Image: Service 15 At every Service B         Trailer hitch: Check condition and operation.         Image: Service 15 At every 80,000 mi         Vehicle exterior         Service 20 every 80,000 mi         Automatic transmission: Change oil and oil filter.         Image: Service 20 every 80,000 mi         Automatic transmission: Change oil and oil filter.         Image: Service 25 every 50,000 mi/5 years         Front axle differential: Change oil.         Area:				Engine 176 177 264	
Service 12 every 50.000 m//5 years         Replace spark plugs.         Engine 176, 177       AP15.10-P-15800CU         Engine 264       AP15.10-P-15800CU         Munderside of vehicle       Service 13 every 120,000 ml/12 years         Replace coolant in main circuit.       Engine 176, 177, 264, 656         Replace low-temperature circuit coolant.       Engine 176, 177         Replace low-temperature circuit coolant.       Engine 176, 177         Vehicle exterior       Service 15 At every Service B         Trailer hitch: Check condition and operation.       O         With code Q55 (Trailer coupling with ball head) or with code Q55 (Trailer coupling with ball head) or with code Q55 (Trailer coupling with ball head) or with code Q55 (Trailer coupling with ball head) or with code Q55 (Trailer coupling with ball head) or with code Q55 (Trailer coupling with ball head) or with code Q55 (Trailer coupling with ball head) or with code Q55 (Trailer coupling with ball head) or with code Q55 (Trailer coupling with ball head) or with code Q55 (Trailer coupling with ball head) or with code Q55 (Trailer Coupling with ball head) or with code Q55 (Trailer Coupling with ball head) or with code Q55 (Trailer Coupling with ball head) or with code Q55 (Trailer Coupling with ball head) or with code Q55 (Trailer Coupling with ball head) or with code Q55 (Trailer Coupling with ball head) or with code Q55 (Trailer Coupling with ball head) or with code Q55 (Trailer Coupling with ball head) or with code Q55 (Trailer Coupling with ball head) or With code Q55 (Trailer Coupling with ball head) or With code Q55 (Trailer Coupling with ball head) or With code Q55 (Trailer Coupling with b			Engine compartment		AF47.20-F-0780GB
Replace spark plugs.       Engine 176, 177       AP15,10-P-15800C         Engine 176, 177       AP15,10-P-15800CU         Engine 264       AP15,10-P-1580MCU         AP15,10-P-1580MCU       AP15,10-P-1580MCU         Service 13 every 120,000 ml/12 years       Replace coolant in main circuit.         Engine 176, 177, 264, 656       AP20,00-P-2082GA         Replace low-temperature circuit coolant.       Engine 176, 177         Engine 176, 177       AP20,00-P-2083C         Vehicle exterior       Service 15 At every Service 8         Trailer hitch: Check condition and operation.       O         With code Q55 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling with bal head) or with code Q59 (Trailer coupling			Service 12 every 50,000 mi/5 years		
Image: Control of Contro					
Image: Control of Contro					
Image: Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.         Engine 176, 177, 264, 656         Image: Replace low-temperature circuit coolant.         Engine 176, 177, 264, 656         Image: Replace low-temperature circuit coolant.         Engine 176, 177         AP20.00-P-2082CA         Image: Replace low-temperature circuit coolant.         Engine 176, 177         AP20.00-P-2083C         Vehicle exterior         Service 15 At every Service B         Trailer hitch: Check condition and operation.         With code Q55 (Trailer coupling with ball head) or with code Q59 (Trailer coupling, removable)         AP31.11-P-3152GA         Image: Provide the service 20 every 80,000 mi         Automatic transmission: Change oil and oil filter.         Transmission 725.0         AP27.00-P-2702GA         Image: Provide 20 every 80,000 mi/5 years         Front axle differential: Change oil.         As of model year 2019         AP33.00-P-3301GA					
Service 13 every 120,000 mi/12 years         Replace coolant in main circuit.         Engine 176, 177, 264, 656         AP20.00-P-2082GA         Replace low-temperature circuit coolant.         Engine 176, 177         Engine 176, 177         AP20.00-P-2083C         Participation         Engine 176, 177         AP20.00-P-2083C         Engine 176, 177         AP20.00-P-2083C         Participation         Pareiton         Pa				Engine 264	AP15.10-P-1580MCU
Image: Constraint of the constraint					
Image: Service 25 every 50,000 mi/S years       Image: Service 25 every 50,000 mi/S years       AP20.00-P-2082CA         Image: Service 25 every 50,000 mi/S years       Image: Service 25 every 50,000 mi/S years       AP20.00-P-2083C         Image: Service 25 every 50,000 mi/S years       Image: Service 25 every 50,000 mi/S years       AP20.00-P-2083C         Image: Service 25 every 50,000 mi/S years       Image: Service 25 every 50,000 mi/S years       AP20.00-P-2083C         Image: Service 25 every 50,000 mi/S years       Image: Service 25 every 50,000 mi/S years       AP20.00-P-2083C         Image: Service 25 every 50,000 mi/S years       Image: Service 25 every 50,000 mi/S years       AP20.00-P-2083C         Image: Service 25 every 50,000 mi/S years       Image: Service 25 every 50,000 mi/S years       AP20.00-P-2083C         Image: Service 25 every 50,000 mi/S years       Image: Service 25 every 50,000 mi/S years       AP20.00-P-2003C         Image: Service 25 every 50,000 mi/S years       Image: Service 25 every 50,000 mi/S years       AP20.00-P-3301GA         Image: Service 25 every 50,000 mi/S years       Image: Service 25 every 50,000 mi/S years       AP33.00-P-3301GA	_	_			
Replace low-temperature circuit coolant.       Engine 176, 177       AP20.00-P-2083C         Vehicle exterior       Service 15 At every Service B       Trailer hitch: Check condition and operation.       O         Trailer hitch: Check condition and operation.       O       AP31.11-P-3152GA         Underside of vehicle       Service 20 every 80.000 mi       AP31.11-P-3152GA         Image: Service 20 every 80.000 mi       Automatic transmission: Change oil and oil filter.       Transmission 725.0         Image: Appendix Provide 25 every 80.000 mi/5 years       Front axle differential: Change oil.       Ap33.00-P-3301GA         Image: Appendix Provide Appendix Provide Prov			Replace coolant in main broat.		
Image: Service 15 At every Service B       Trailer hitch: Check condition and operation.       O         Vehicle exterior       Vehicle exterior       O         Service 15 At every Service B       Trailer hitch: Check condition and operation.       O         With code Q55 (Trailer coupling with ball head) or with code Q59 (Trailer coupling, removable)       AP31.11-P-3152GA         Image: Provide 20 every 80,000 mi       Automatic transmission: Change oil and oil filter.       Transmission 725.0         Image: Provide 25 every 50,000 mi/5 years       Front axle differential: Change oil.       As of model year 2019         Image: Provide Image				Engine 176, 177, 264, 656	AP20.00-P-2082GA
Image: Constraint of the constraint				-	
Image: Problem Service 15 At every Service B       AP20.00-P-2083C         Image: Problem Service 15 At every Service B       Trailer hitch: Check condition and operation.       Image: Problem Service Check Condition and operation.         Image: Problem Service 20 every 80,000 mi       With code Q55 (Trailer coupling with ball head) or with code Q59 (Trailer coupling, removable)       AP31.11-P-3152GA         Image: Problem Service 20 every 80,000 mi       Automatic transmission: Change oil and oil filter.       Image: Problem Service 20 every 80,000 mi         Image: Problem Service 20 every 80,000 mi       Automatic transmission: Change oil and oil filter.       Image: Problem Service 20 every 80,000 mi/S years         Image: Problem Service 25 every 50,000 mi/S years       Front axle differential: Change oil.       Ap33.00-P-3301GA         Image: Problem Service 20 every 80,000 mi/S years       As of model year 2019       AP35.00-P-3501GA			Replace low-temperature circuit coolant.		
AP20.00-P-2083C         Vehicle exterior         Service 15 At every Service B         Trailer hitch: Check condition and operation.         With code Q55 (Trailer coupling with ball head) or with code Q59 (Trailer coupling, removable)         AP31.11-P-3152GA         Underside of vehicle         Service 20 every 80,000 mi         Automatic transmission: Change oil and oil filter.         Transmission 725.0         AP27.00-P-2702GA         Underside of vehicle         Service 25 every 50,000 mi/5 years         Front axle differential: Change oil.         As of model year 2019         AP33.00-P-3301GA					
Vehicle exterior Service 15 At every Service B Trailer hitch: Check condition and operation.       O         With code Q55 (Trailer coupling with ball head) or with code Q59 (Trailer coupling, removable)       AP31.11-P-3152GA         Underside of vehicle Service 20 every 80,000 mi Automatic transmission: Change oil and oil filter.       Automatic transmission: Change oil and oil filter.         Underside of vehicle Service 25 every 50,000 mi/5 years Front axle differential: Change oil.       AP27.00-P-2702GA         Rear axle differential: Change oil.       As of model year 2019       AP33.00-P-3301GA         As of model year 2019       AP35.00-P-3501GA				Engine 176, 177	
Service 15 At every Service B         Trailer hitch: Check condition and operation.         With code Q55 (Trailer coupling with ball head) or with code Q59 (Trailer coupling, removable)         AP31.11-P-3152GA         Image: Comparison of the comparison			Vahiola axtoriar		AP20.00-P-2083C
Image: Service 20 every 80,000 mi       Mith code Q55 (Trailer coupling with ball head) or with code Q59 (Trailer coupling, removable)         Image: AP31.11-P-3152GA					
Image: Constraint of the constraint			-		$\sim$
ball head) or with code Q59 (Trailer coupling, removable)       AP31.11-P-3152GA         AP31.11-P-3152GA       AP31.11-P-3152GA         Automatic transmission: Change oil and oil filter.       Transmission 725.0         Transmission 725.0       AP27.00-P-2702GA         Image: Service 25 every 50,000 mi/5 years       Front axle differential: Change oil.         As of model year 2019       AP33.00-P-3301GA         Ap35.00-P-3501GA       Ap35.00-P-3501GA					0
Image: Coupling, removable       AP31.11-P-3152GA         Image: Coupling, removable       Automatic transmission: Change oil and oil filter.         Image: Coupling, removable       Transmission 725.0         Image: Coupling, removable       AP27.00-P-2702GA         Image: Coupling, removable       Transmission 725.0         Image: Coupling, removable       Transmission 725.0         Image: Coupling, removable       AP27.00-P-2702GA         Image: Coupling, removable       Transmission 725.0         Image: Coupling, removable       AP27.00-P-2702GA         Image: Coupling, removable       AP33.00-P-3301GA         Image: Coupling, removable       AP35.00-P-3501GA         Image: Coupling, removable       AP35.00-P-3501GA					
AP31.11-P-3152GA         Barbon Construction         Automatic transmission: Change oil and oil filter.         Transmission 725.0         AP27.00-P-2702GA         Automatic transmission: Change oil and oil filter.         Transmission 725.0         AP27.00-P-2702GA         Automatic transmission: Change oil and oil filter.         Transmission 725.0         AP27.00-P-2702GA         Ap31.11-P-3152GA         Ap32.00-P-350,000 mi/5 years         Front axle differential: Change oil.         Ap33.00-P-3301GA         Ap35.00-P-3501GA					
Underside of vehicle Service 20 every 80,000 mi         Automatic transmission: Change oil and oil filter.         Transmission 725.0         Underside of vehicle Service 25 every 50,000 mi/5 years Front axle differential: Change oil.         As of model year 2019         Rear axle differential: Change oil.         As of model year 2019         AP35.00-P-3501GA				ocapility, removable/	AP31 11-P-3152G4
Service 20 every 80,000 mi         Automatic transmission: Change oil and oil filter.         Transmission 725.0         Munderside of vehicle         Service 25 every 50,000 mi/5 years         Front axle differential: Change oil.         As of model year 2019         AP33.00-P-3301GA         Ap35.00-P-3501GA			Underside of vehicle		A 01.11-1-01020A
Image: Automatic transmission: Change oil and oil filter.       Automatic transmission: Change oil and oil filter.         Transmission 725.0       AP27.00-P-2702GA         Image: Automatic transmission: Change oil and oil filter.       Transmission 725.0         Image: Automatic transmission: Change oil and oil filter.       Transmission 725.0         Image: Application of the transmission: Change oil and oil filter.       Transmission 725.0         Image: Application of transmission: Change oil and oil filter.       Application of transmission 725.0         Image: Application of transmission: Change oil and oil filter.       Application of transmission 725.0         Image: Application of transmission: Change oil and oil filter.       As of model year 2019         Image: Application of transmission: Change oil and oil filter.       Application of transmission 725.0         Image: Application of transmission: Change oil and oil filter.       As of model year 2019         Application of transmission: Change oil and oil filter.       Application of transmission 725.0         Image: Application of transmission: Change oil and oil filter.       Application of transmission of					
Image: Marking the service of the s			•		
Underside of vehicle         Service 25 every 50,000 mi/5 years         Front axle differential: Change oil.         As of model year 2019         AP33.00-P-3301GA         Rear axle differential: Change oil.         As of model year 2019         AP35.00-P-3501GA			filter.		
Service 25 every 50,000 mi/5 years         Front axle differential: Change oil.         As of model year 2019         AP33.00-P-3301GA         Rear axle differential: Change oil.         As of model year 2019         AP35.00-P-3501GA				Transmission 725.0	AP27.00-P-2702GA
Image: Front axle differential: Change oil.       As of model year 2019       AP33.00-P-3301GA         Image: As of model year 2019       AP35.00-P-3501GA         As of model year 2019       AP35.00-P-3501GA					
Image: Constraint of the second se					
Rear axle differential: Change oil.   As of model year 2019 AP35.00-P-3501GA			i tont axie unterentiai. Change oli.		
Rear axle differential: Change oil.   As of model year 2019 AP35.00-P-3501GA				As of model year 2019	AP33.00-P-3301GA
As of model year 2019         AP35.00-P-3501GA				-	
			Rear axle differential: Change oil.		
			24 1/10/20 apr00 20.p.1240ak OVEDVIEW/ for convice about USA	As of model year 2019	AP35.00-P-3501GA Page 4 of 5

© Daimler AG, 9/25/24, L/10/20, ap00.20-p-1240ak, OVERVIEW for service sheet, USA Model 463.210 Model 463.260/261 Model 463.276/277 Model 463.349/350

-----

Transmission 725.0

## Brake values

	Left	Right
Front		
Rear		
Parking brake		

## **Tire condition**

	Right front	Left front	Right rear	Left rear
Condition OK.				
Condition not OK.				

## Set tire pressure in bar or psi

	Front axle	Rear axle	Spare wheel
bar/psi			