


## MODEL 164

Shown on right-hand side

- 1 Front door sill molding
- 2 Rear door sill molding

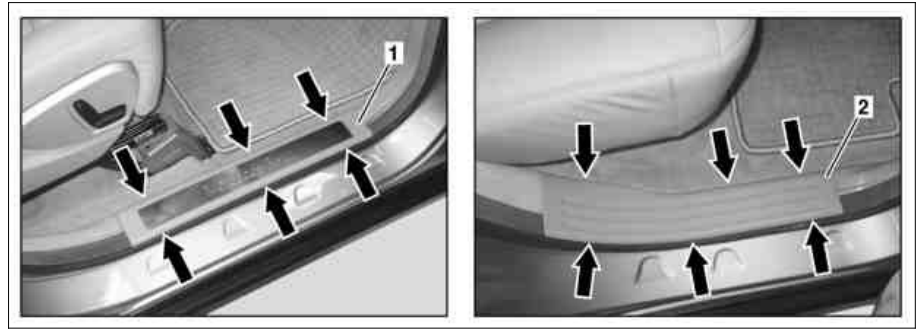

P68.30-3022-04

☒ ☒	Remove/Install		
1	Completely open front and rear door		
2	Unclip front door sill molding (1) and rear door sill molding (2) upward from retaining clips (arrows) by hand and remove.	<b>i</b> <b>Installation:</b> Replace damaged retaining clips.	
3	Install in the reverse order		