


Shown on model 251.1

1 Side paneling



P68.30-3160-03

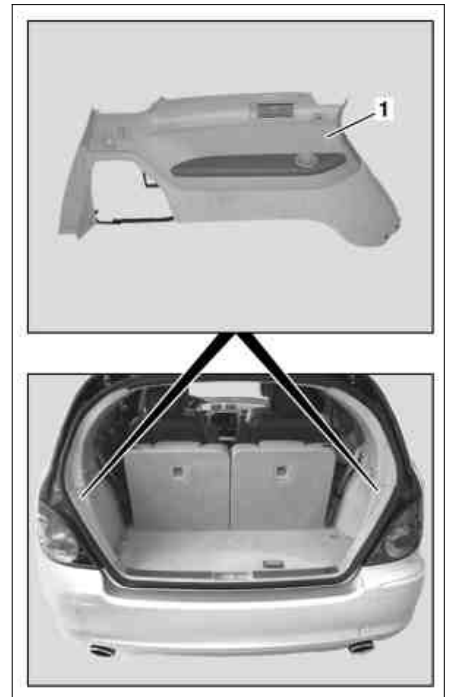

P68.30-3161-07

Shown on model 251.1 with rear air conditioning, code 582

2 Cover
3 Bolt




4 Bolt
5 Luggage hook

6 Cover
7 Bolt

Shown on model 251.1




P68.30-3162-04

 	Remove/install		
1.1	Remove load compartment cover	 Only on vehicles with luggage compartment cover, code 723.	
2	Open cover (2) and remove		
3	Remove screw (3)		
4	Unscrew bolt (4), remove luggage hook (5).		
5	Remove door sill molding in load compartment	Model 164.8	AR68.30-P-4100GZA

		Model 251	AR68.30-P-4100RTA
6.1	Unscrew seat belt bolt on body in second seat row.	i Only model 164.8. Nm	*BA91.40-P-1001-01H
7	Fold over seats in second and third seat row.		
8	Remove door sill molding	i Only on rear door. Model 164.8 Model 251	AR68.30-P-4100GZ AR68.30-P-4100RT
9	Unclip cover (6), unscrew bolt (7)	i At front and rear on side paneling (1). S Long wedge	*115589035900
10	Unclip side paneling (1) from clips (arrows A and B)	i Model 164.8: Only two clips (arrows A) on front end of side paneling (1). S Mounting wedge	*110589035900
11.1	Disconnect connector from 12 V socket	i If present.	
12.1	Disconnect connector on load compartment illumination	i If present.	
13.1	Disconnect connector on folding mechanism switch in 3rd seat row	i Model 164.8, if present	
14	Remove side paneling (1)		
15	Install in the reverse order		


Nm Seat belts/emergency tensioning retractors

Number	Designation	Models 164.1/8
BA91.40-P-1001-01H	Bolt to seat belt fitting	Nm 35



110 589 03 59 00

Mounting wedge



115 589 03 59 00

Long wedge