


Model 253 (except 253.354/954)
with code 889 (KEYLESS-GO)


Model 253 (except 253.354/954)
with code 893 (KEYLESS-GO)

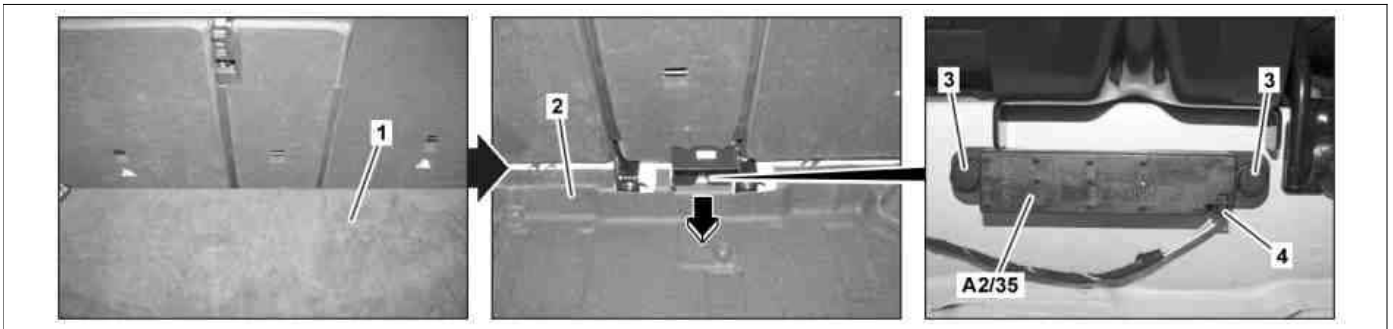

P80.61-2906-07

1 Load compartment floor 3 Mounting clip A2/35 Trunk KEYLESS GO antenna
2 Cover 4 Electrical connector

	Risk of injury caused by fingers being jammed or pinched when removing, installing or aligning hoods, doors, trunk lid/rear-end door or sliding roof.	No parts of the body or limbs should be within the operating area when the components are moving.	AS00.00-Z-0011-01A
ⓘ	Information on preventing damage to electronic components due to electrostatic discharge		AH54.00-P-0001-01A
i	Notes on sensor system for trunk lid opening/closing	Model 253 (except 253.354/954) with code 871 (HANDS-FREE ACCESS) with code 889 (KEYLESS-GO) with code 893 (KEYLESS-GO)	AH80.61-P-0001-01A
🔧 🛠	Remove/install		
1	Switch off ignition and store transmitter key outside of transmission range (min. 2 m)		
2	Remove load compartment floor (1)		
3	Fold paneling (2) toward rear until KEYLESS-GO trunk antenna (A2/35) is accessible		
4	Release and disconnect electrical connection (4)		
5	Remove mounting clips (3)	🔧 Clip remover	*452589016300
6	Remove KEYLESS-GO trunk antenna (A2/35)		
7	Install in the reverse order		



452 589 01 63 00

Clip remover