

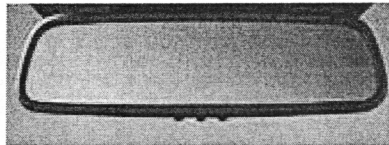


Programming the Homelink Garage Door Opener for 2012 Vehicles (Mirror Opener)

Before beginning the process:

1. Make sure that objects, people and the vehicle are not present within the sweep of the garage door.
2. The status lamp on the mirror opener can turn green, red or yellow.
3. Anytime a red indicator lamp appears on the mirror opener, the process needs to be started again
4. The customer needs to have their garage door **remote control with them** to program the mirror opener.
5. Start the vehicle outside in a safe place.



Step 1. If necessary, clear out any old codes by pushing and holding the 2 outer buttons, a solid yellow lamp will come on. Release both buttons when the lamp changes to solid green. Do not continue until the solid green lamp goes out.

Step 2. Have the customer choose, but do not touch, one of the 3 buttons on the mirror opener which will be used to open their garage door.

Step 3. Push the customer's selected button on the mirror opener for **1 second**. While pushing, the lamp will go solid yellow, when you let it go it will start to blink yellow

Step 4. Have the customer pick up their remote control and hold it just below the buttons on the mirror opener. Press the button on the **customer's remote control** until the mirror opener status lamp turns green.

Step 5. If the status lamp is solid green, **you are done**. If blinking green, the customer's opener is a rolling code type and requires further programming. Go to **Step 6**.

Step 6. The next steps must be done while the vehicle is at the location of the customer's garage door.

1. Ask the customer to press the **programming button** or **learning button** located on the customer's garage door opener. A ladder or flashlight may be necessary.
2. Within 30 seconds, press the **same** mirror opener button selected earlier in **Step 2** repeatedly until the door opens.
3. Programming complete.