


AR54.35-P-1555GH	Remove/install fanfare horns	20.1.97
------------------	------------------------------	---------

MODEL 163

- 1 Nut
- 2 Connector
- 3 Connector
- H2 Fanfare horns

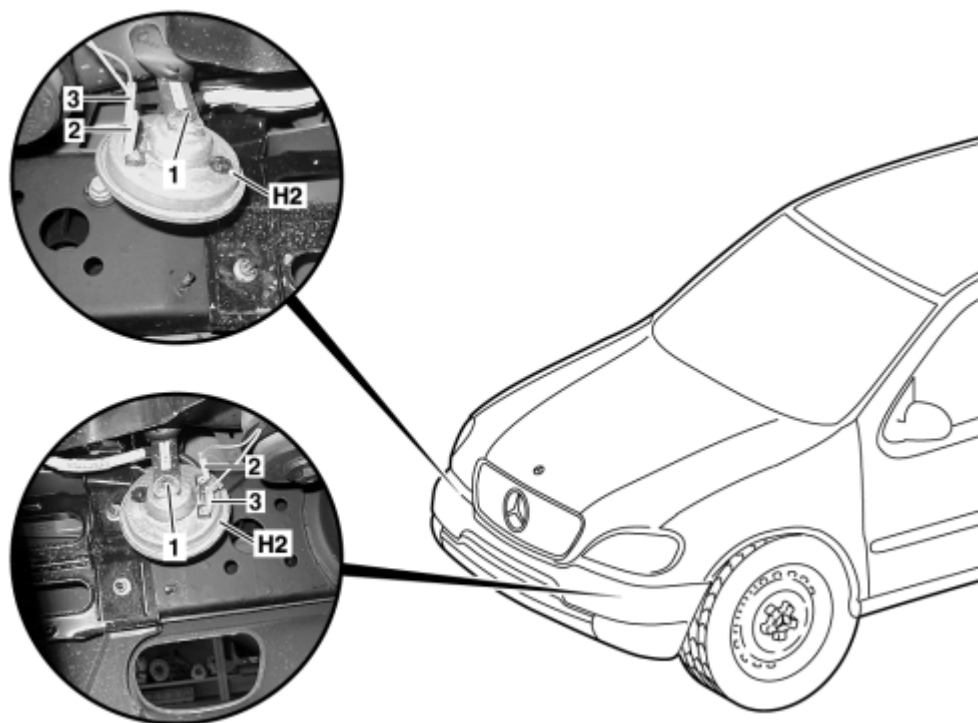

P54.35-2066-06

	<p>Remove/Install</p>		
<p> Danger!</p>	<p>Risk of death caused by vehicle slipping or toppling off of the lifting platform.</p>	<p>Align vehicle between the columns of the hydraulic hoist and position the four support plates below the hoist support points specified by the vehicle manufacturer.</p>	<p>AS00.00-Z-0010-01A</p>

1	Jacking up and supporting vehicle		AR00.60-P-1000GH
2	Lock over the front wheels	i Makes access to the fanfare horns easier.	
3	Unplug connector (2,3)		
4	Unscrew nut (1)		
5	Remove fanfare horns (H2)	i Installation: Ensure that the fanfare horns no not contact surrounding components. Maintain a minimum distance of at least 10 mm.	
6	Install in the reverse order		