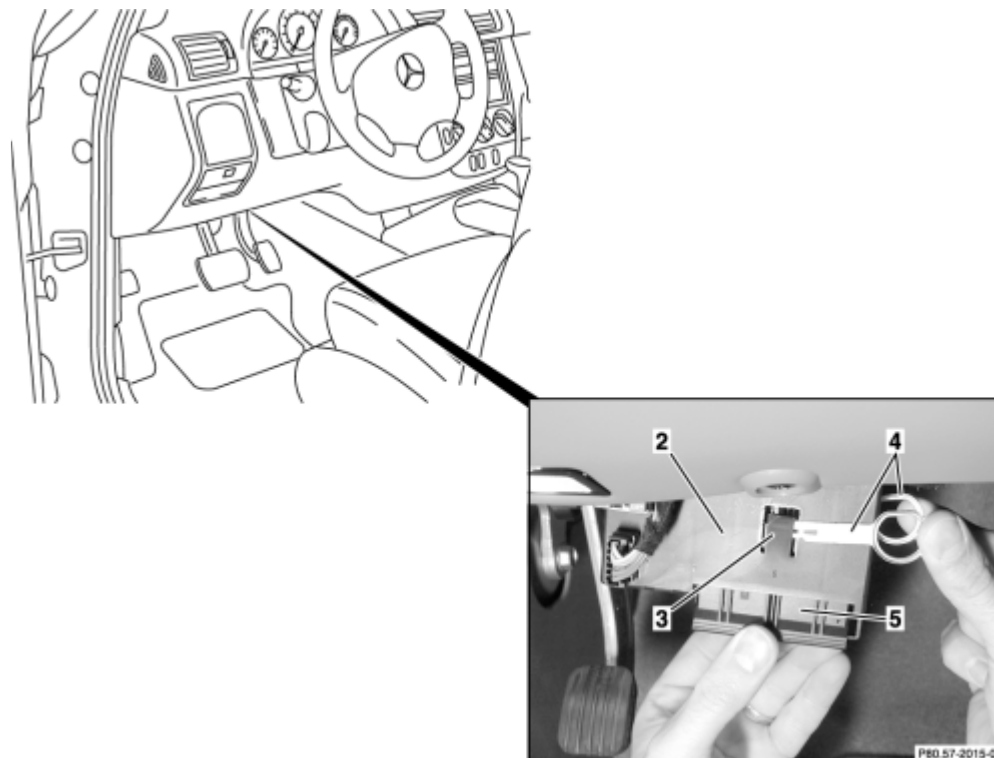



AR54.21-P-1300GH	Remove/install drive authorization module (FBM)	11.7.00
------------------	---	---------





MODEL 163.154 /172 #A as of 145273,
163.154 /172 #X as of 708319,
163.157 /174 /175

- 2 Extended-Activity-Module (EAM)
- 3 Retaining lugs
- 4 Removal tools
- 5 DAS control module



P54.21-2099-06

	Remove/install		
1	Remove Extended-Activity-Module (EAM) (2)		AR54.21-P-1200GH
2	Loosen the retaining lugs (3) which hold		

	the DAS control module (5) in the EAM	 Ensure that the retaining lugs do not break off.  Use radio removal tools (4) for removal.	
3	Remove the DAS control module from the EAM	 Before installing a new DAS control module, determine in the old DAS control module whether keys are banned and code suitably in the new DAS control module.  Note: The chassis number must be stated when ordering a new control module.	
4	Install in the reverse order		
5	Move ignition key into position 1 for at least 40 seconds		
6	Check whether the vehicle can be started with all keys		