

AR72.20-P-3650GH

Remove/install tailgate handle molding

25.2.97

**MODEL 163**

1 Handle

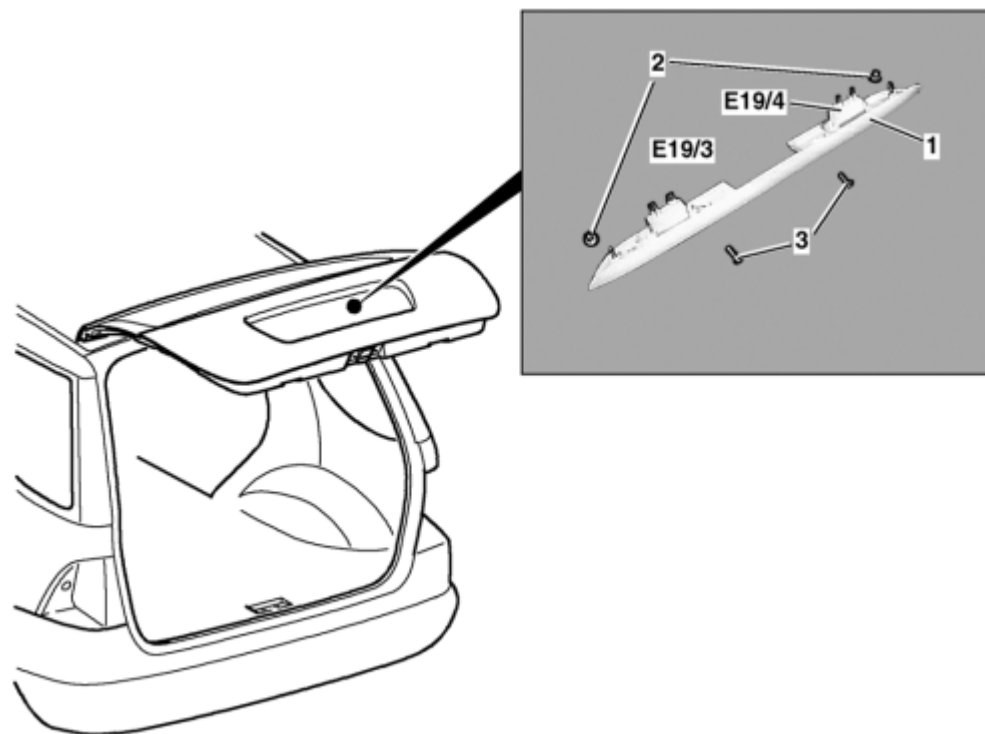
2 Nut

3 Bolt

E19/3 Left rear tailgate door license plate lamp



lamp

E19/4 Right rear tailgate door license plate lamp



P72.20-0360-06

☒ ☒	Remove/install		
1	Remove liner on tailgate	<b>i</b> Do not remove upper section of door liner (omit steps 11 - 13 ).	<a href="#">AR72.20-P-3520GH</a>
2	Unscrew nuts (2) on handle strip (1) from inside of tailgate	<b>i</b> From the door inside.	

3	Disconnect connector from the license plate lamp, rear-end door on left (E19/3) or license plate lamp, rear-end door on right (E19/4)		
4	Unscrew screws (3) on handle strip (1)	 From door outer side.	
5	Remove handle strip (1)	 Risk of breakage. Do not scratch paint	
6	Install in the reverse order		