



AR88.40-P-3010GH	Remove/install gas-operated strut on engine hood	6.4.99
------------------	--	--------



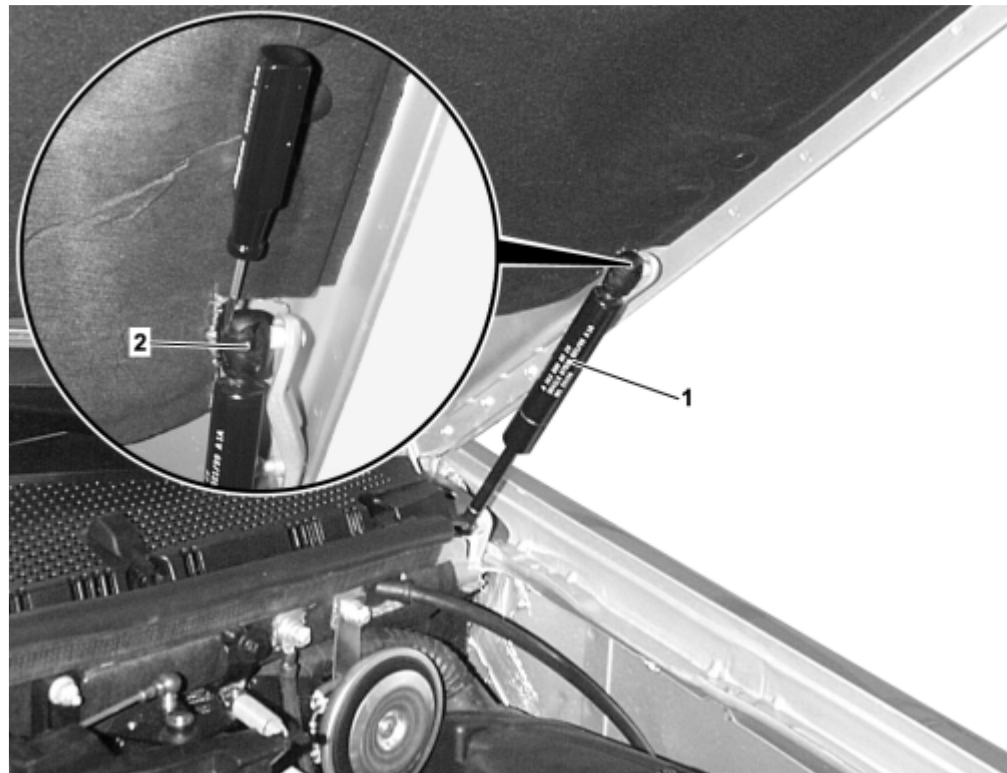

MODEL 163.154 /172 #A as of 145273,
163.154 /172 #X as of 708319,
163.157 /174 /175

1 Gas pressure strut
2 Fuse



P88.40-2063-06

	Remove, Install		
1	Open engine hood		
2	Secure engine hood		

3	Lift retainer (2) on top of gas-operated strut (1) and detach gas-operated strut at the top	 Risk of breakage. Do not remove the retainer otherwise the preload will be lost.	
4	Lift retainer on bottom of gas-operated strut and remove gas-operated strut (1)	 When replacing gas pressure strut: ↓	
 Danger!	Risk of injury due to drilling gas-filled equipment or components (gas filling not flammable)	Wear safety goggles and face mask.	AS00.00-Z-0006-01A
 OS	Degas and drain gas pressure strut		OS00.00-P-1001-01A
5	Install in the reverse order		