
AR68.10-P-1520GI

MODEL 163.154 /172 #A as of 145273, 163.154 /172 #X as of 708319, 163.157 /174 /175

1 Torx bolts 2 Cover 3 Locking lever X58/1 Interior socket

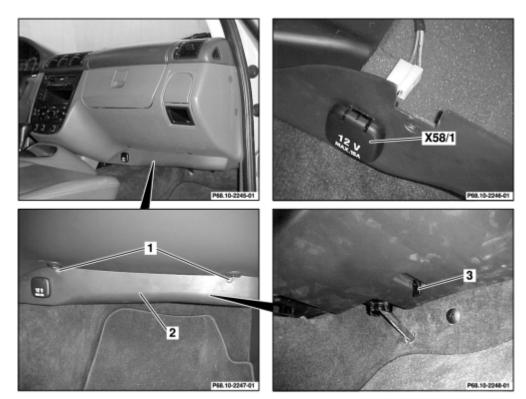

P68.10-2249-06

XX	Remove/Install	
1	Unscrew Torx screws (1) form cover (2)	
2	Fold locking lever (3) downward	

3	Pull cover (2) downward and lay down	
4	Disconnect electrical connector from interior socket (X58/1)	
5	Install in the reverse order	