

AR82.60-P-7502EA

Remove/install radio

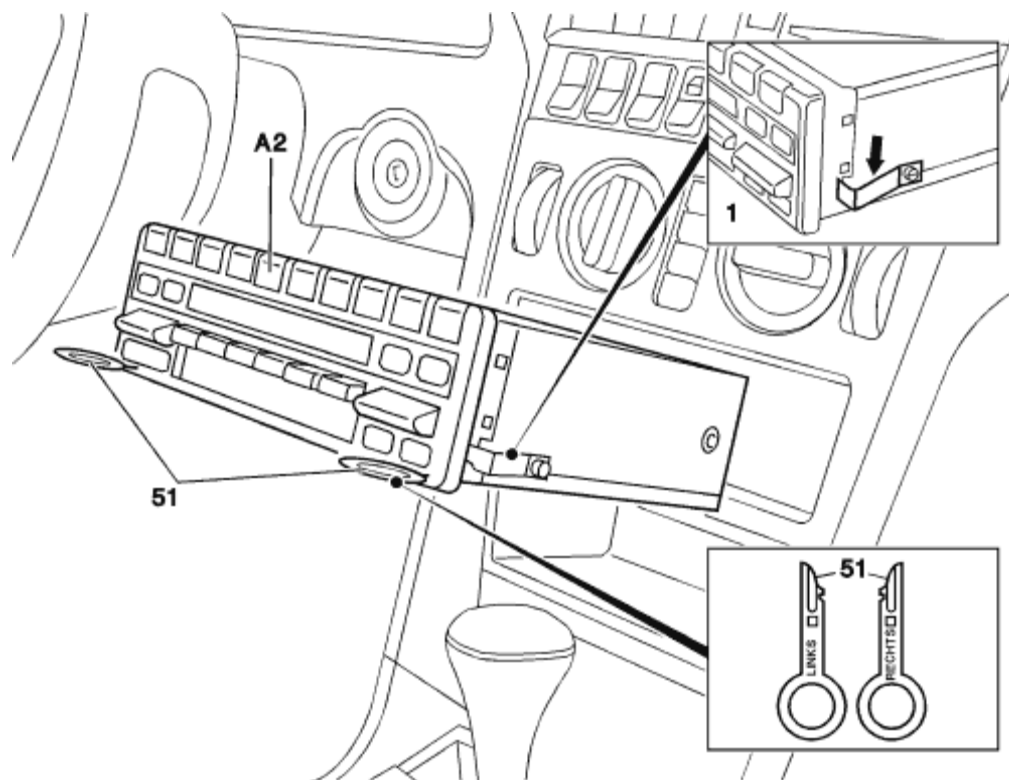
5.5.94

**MODEL 163**

- with CODE (257) Hi-Line radio
- with CODE (259) Premium radio with Bose sound system
- with CODE (352) COMAND operating and display system
- with CODE (353) Audio 30 APS
- with CODE (357) Navigation system - additional unit
- with CODE (522) Modular control system (MCS) radio USA
- with CODE (750) MB Audio 30 RDS radio
- with CODE (752) Becker Mexico 2000 radio with traffic news decoder
- with CODE (753) MB Audio 30 RDS radio
- with CODE (756) MB Audio 10 RDS radio with CD compartment





*The figure shows removal of radio in model 202*

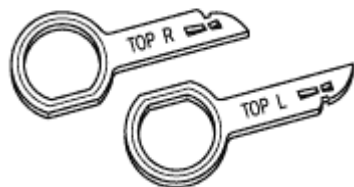
51 Removal assembly  
A2 Radio



P82.60-0001-06

**Insert keys and push them outwards and at the same time pull radio out.**

	Remove/Install		
1	Disconnect battery ground cable	 On model 163, insulate cable terminal for ground lead to prevent unintentional contact between disconnected ground lead and ground point W10	<a href="#">AR54.10-P-0003A</a>
2	Pull out radio (A2)	 Insert removal fixture (51) for this purpose.	
			<a href="#">000 589 88 63 00</a>
		Push back retaining springs (arrow) on removed radio (A2) and pull out removal fixture (51).	
3	Disconnect electrical connectors		
4	Install in the reverse order		
5	Enter radio code	Code 750, 751	<a href="#">AR82.60-P-7502-01A</a>
		Code 510a, 512a, 515a, 516a, 755, ER5, ER6, ER7	<a href="#">AR82.60-P-7502-01B</a>
		Model 163	<a href="#">AR82.60-P-7502-01GH</a>



000 589 88 63 00

Removal assembly