

AR82.60-P-7502EA

Remove/install radio

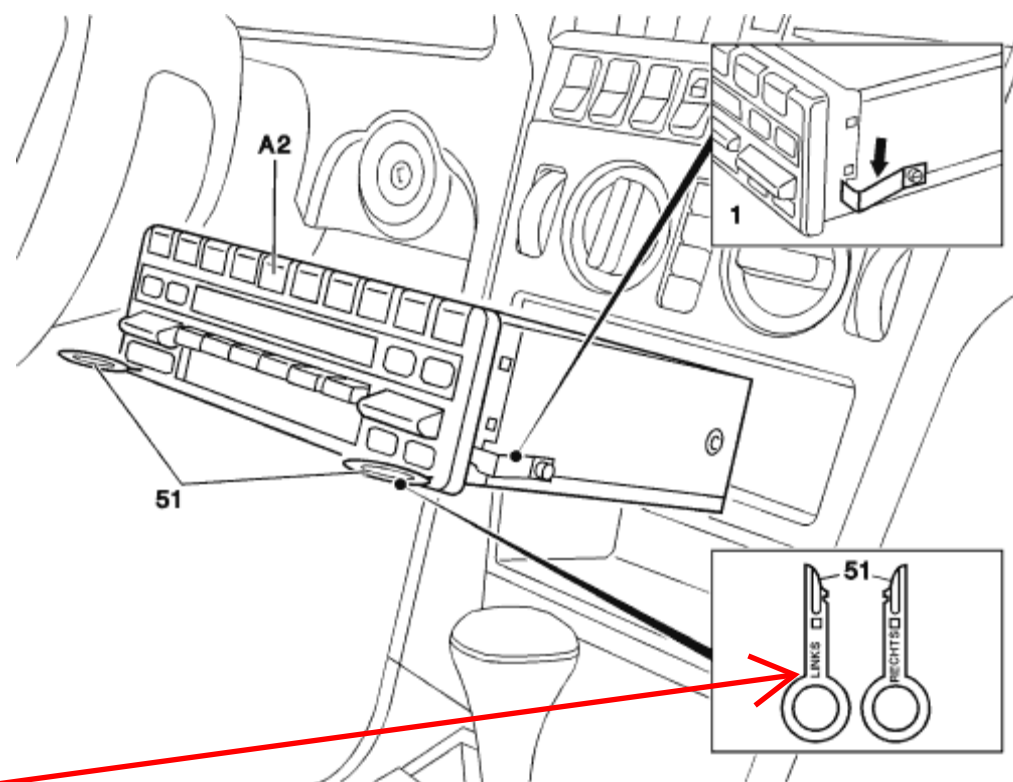
5.5.94

MODEL 163

- with CODE (257) Hi-Line radio
- with CODE (259) Premium radio with Bose sound system
- with CODE (352) COMAND operating and display system
- with CODE (353) Audio 30 APS
- with CODE (357) Navigation system - additional unit
- with CODE (522) Modular control system (MCS) radio USA
- with CODE (750) MB Audio 30 RDS radio
- with CODE (752) Becker Mexico 2000 radio with traffic news decoder
- with CODE (753) MB Audio 30 RDS radio
- with CODE (756) MB Audio 10 RDS radio with CD compartment





The figure shows removal of radio in model 202

51 Removal assembly
A2 Radio



P82.60-0001-06

Insert keys with cut-outs facing inwards. Then push keys outwards and at the same time pull radio out.

	Remove/Install		
1	Disconnect battery ground cable	 On model 163, insulate cable terminal for ground lead to prevent unintentional contact between disconnected ground lead and ground point W10	AR54.10-P-0003A
2	Pull out radio (A2)	 Insert removal fixture (51) for this purpose.	
			000 589 88 63 00
		Push back retaining springs (arrow) on removed radio (A2) and pull out removal fixture (51).	
3	Disconnect electrical connectors		
4	Install in the reverse order		
5	Enter radio code	Code 750, 751	AR82.60-P-7502-01A
		Code 510a, 512a, 515a, 516a, 755, ER5, ER6, ER7	AR82.60-P-7502-01B
		Model 163	AR82.60-P-7502-01GH



[000 589 88 63 00](#)

[Removal assembly](#)