


AR68.30-P-4470GH	Remove/install rear roof frame paneling	24.2.97
------------------	---	---------

MODEL 163

- 1 Belt end fitting in 3rd seat row
 2 Center paneling of roof frame
 3 Side paneling of roof frame
 4 Expanding anchor
 5 Screw

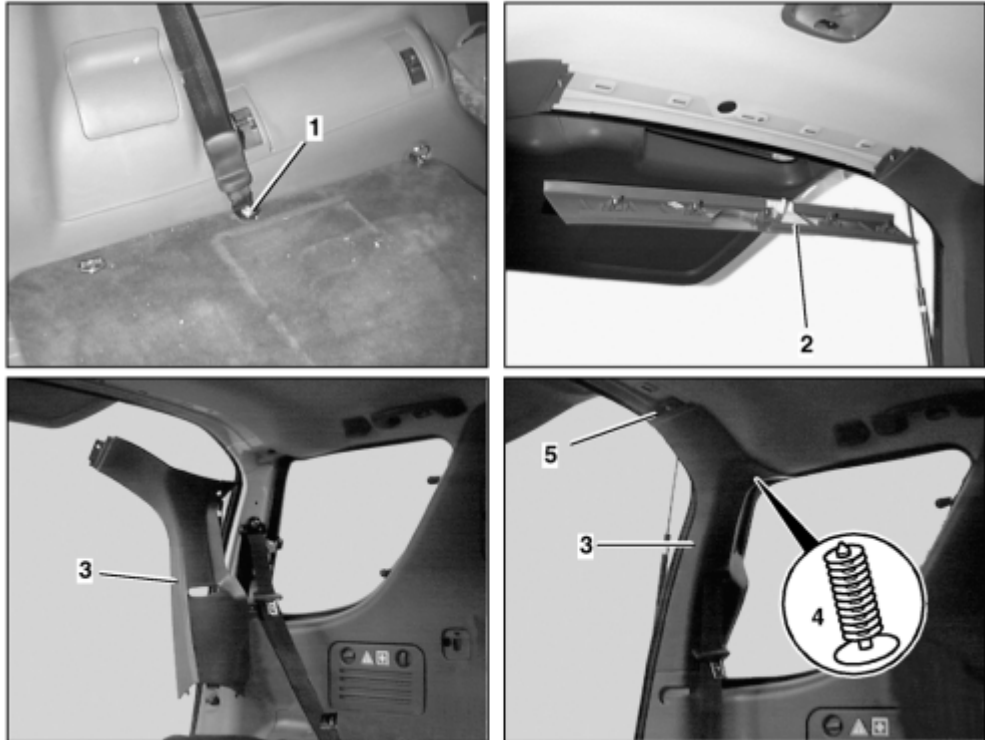

P68.30-0507-06

	Remove, Install		
1.1	Remove belt end fitting at bottom of 3rd seat row (1)	Only with 3rd seat row, code 847.	
			BA91.40-P-1001-01D
2	Unclip center roof frame covering (2)	Installation: Install paneling in door rubber seal.	
		Long wedge	115 589 03 59 00
3.1	Remove expanding anchor (4) from side roof frame covering (3)	up to 31.08.01 Installation: Replace expanding anchor.	
3.2	Remove screw (5) from side roof frame paneling (3)		
4.1	Unclip side roof frame paneling in upper outer corner	As of 01.09.01	
4.2	Remove side roof frame paneling (3) upward	Only on 3rd seat row, code 847: remove seatbelt and remove paneling	
		Installation: Install paneling in door rubber seal.	
5.1	Disconnect connector from loudspeaker	As of 01.09.01 and with sound system, code 810.	
6	Install in the reverse order		

Seat belts/belt tensioners

Number	Designation	Model 163 up to 08/99	Model 163 as of 09/99
BA91.40-P-1001-01D	Screw on belt end fitting	Nm 35	35



115 589 03 59 00

Assembly wedge