





AR88.10-P-1300GH	Removing and installing inner fender in front fender	15.4.97
------------------	--	---------

MODEL 163

- 1 Inner fender
2 Nut for inner fender

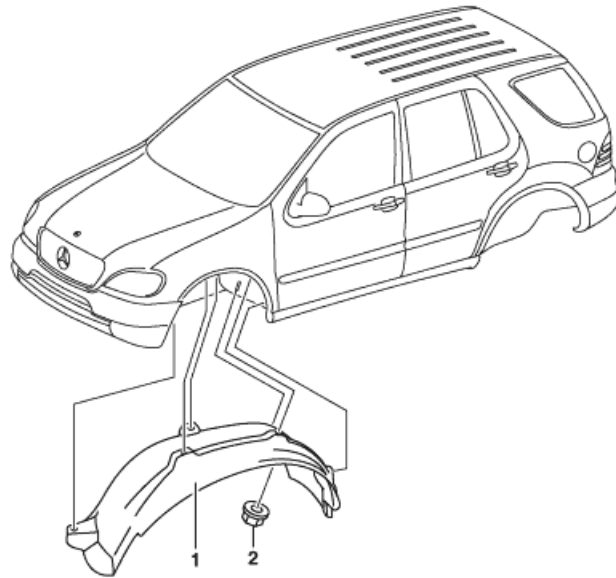

P88.10-0288-06

	Removal, installation		
1	Unscrew nut for inner fender (2)		
2	Remove inner fender (1)	 Do not damage fender cutout and paint  Pull front and rear section of inner fender (1) downward, move inner fender away inward and downward, then pull toward outside over wheel	
3	Install in opposite order		