


AR72.10-P-4015GZ	Removing and installing front door lock cylinder	14.11.05
------------------	--------------------------------------------------	----------

MODEL 164




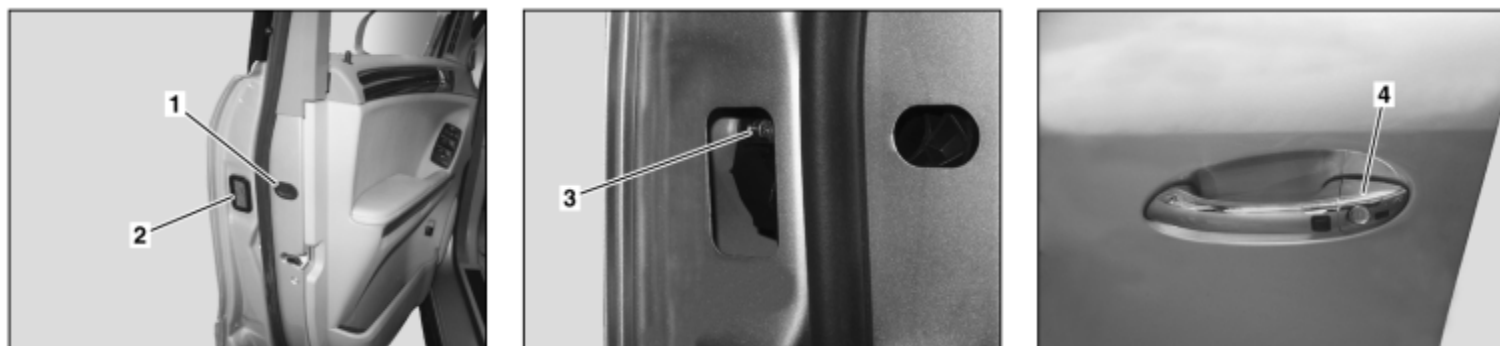



P72.10-3043-07

**Illustrated on model 164.1**

1 Rubber grommet  
2 Reflector

3 Screw  
4 Lock cylinder

	Remove/install		
1	Pry off rubber grommet (1) and reflector (2)	 Long wedge	<a href="https://www.mercedes-benz.com/115-589-03-59-00">115 589 03 59 00</a>
2	Loosen screw (3)	 <b>Installation:</b> Do not excessively tighten the screw (3), otherwise the lock cylinder (4) will be damaged.	
3	Remove lock cylinder (4)	 The electrical connector is disconnected when the lock cylinder (4) is pulled out.	
4	Install in the reverse order		

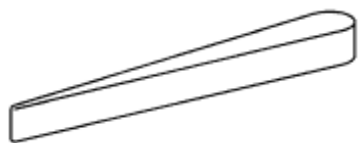

115 589 03 59 00

Long wedge