

AR88.10-P-1310GZ


Remove/install fender liner front section in front fender

23.11.05

MODEL 164

**Shown on model 164.1**

- 1 Nuts
- 2 Front section of fender liner
- 3 Expansion rivets
- 4 Bolts

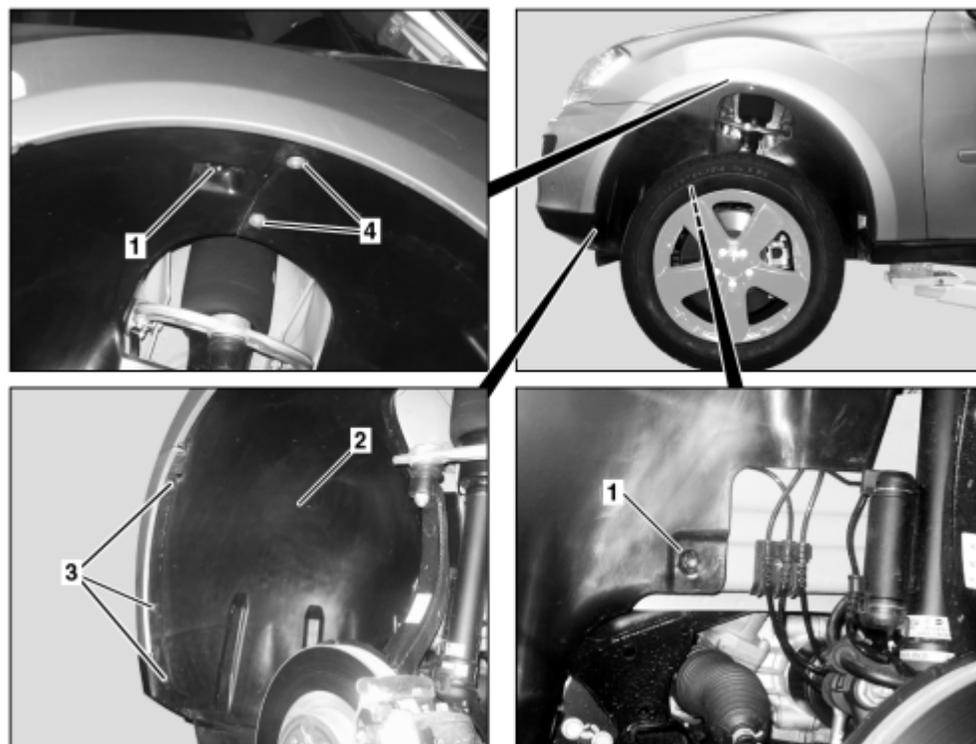

P88.10-2139-06

☒ ☒	<b>Remove/install</b>		
⚠ <b>Danger!</b>	<b>Risk of death</b> caused by vehicle slipping or toppling off of the lifting platform.	Align vehicle between the columns of the lifting platform and position the four support plates at the lifting platform support points specified by the vehicle manufacturer.	<a href="#">AS00.00-Z-0010-01A</a>
1	Lift/jack up vehicle		<a href="#">AR00.60-P-1000GZ</a>

2	Unscrew bolts of fender liner front section (2) on bumper.		
3	Unscrew nuts (1).		
4	Remove expansion rivets (3)		
5	Remove screws (4)		
6	Lift rear section of fender liner in fender.	 Lift rear section of fender liner at top overlap with mounting wedge until front section of fender liner (2) can be removed from fender.	
		 Mounting wedge	<a href="#">110 589 03 59 00</a>
7	Remove front section of fender liner (2) from fender		
8	Install in the reverse order		



110 589 03 59 00

Mounting wedge