


## MODEL 164







- 1 Glove compartment
- 2 Dashboard side paneling
- 3 Bolts
- 4 Actuation button

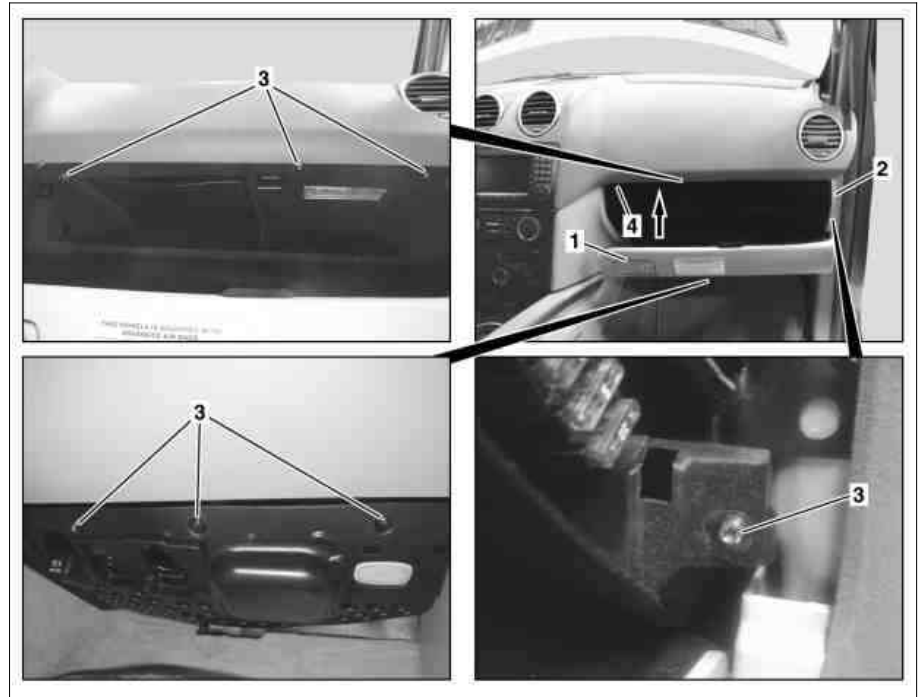


P68.10-3269-06

## Modification notes

15.9.11	Switch off ignition and remove transmitter key from EZS control unit, added	Operation step 1	
5.10.11	Remove and disconnect electrical connectors, added	Steps 4, 5, 9	

 <b>Remove</b>			
	Information on preventing damage to electronic components due to electrostatic discharge		AH54.00-P-0001-01A
	Notes on avoiding damage to optical fibers during repair work	With Media Oriented System Transport (MOST)	AH82.60-P-0001-05AK
1	Switch off ignition and remove the transmitter key from the EIS [EZS] control unit	 On vehicles with code (889) Keyless Go: Press keyless go start/stop button repeatedly until ignition is switched off. Remove transmitter key from vehicle and store it in a location beyond its transmission range (at least 2 m).	
2	Open glove compartment (1)		
3	Move CD Changer (arrow) to closing position	Only on vehicles with code (819) CD changer.	
4	Remove Media Interface electrical connector from glove box	Only on vehicles with code (518) Media Interface	AR68.10-P-1400-02CW
5	Remove AUX jack electrical connector from glove box	Only on vehicles without code (518) Media Interface	AR68.10-P-1400-01CW
6	Remove dashboard side paneling (2).	 Long wedge	*115589035900
7	Remove screws/bolts (3)		
8	Remove glove compartment (1) downward and disconnect electrical connector for glove compartment illumination		
9	Disconnect electrical connector from CD changer	Only on vehicles with code (819) CD changer.	
 <b>Install</b>			
10	Connect electrical connector to CD changer	Only on vehicles with code (819) CD changer.	
11	Connect electrical connector for glove box illumination		
12	Install Media Interface electrical connector in glove box	Only on vehicles with code (518) Media Interface	AR68.10-P-1400-02CW
13	Install AUX jack electrical connector from glove box	Only on vehicles without code (518) Media Interface	AR68.10-P-1400-01CW
14	Position glove box (1) on instrument panel		
15	Screw in screws (3)		

16	Install instrument panel side paneling (2)		
17	Check CD changer actuation button (4) for proper function		
18	Close glove box (1)		



Long wedge