


AR91.12-P-6005GY	Remove/install gas-operated strut on seat frame	11.5.06
------------------	---	---------


MODEL 164.8
40 % rear seat

- 1 Fuses
- 2 Gas-operated strut

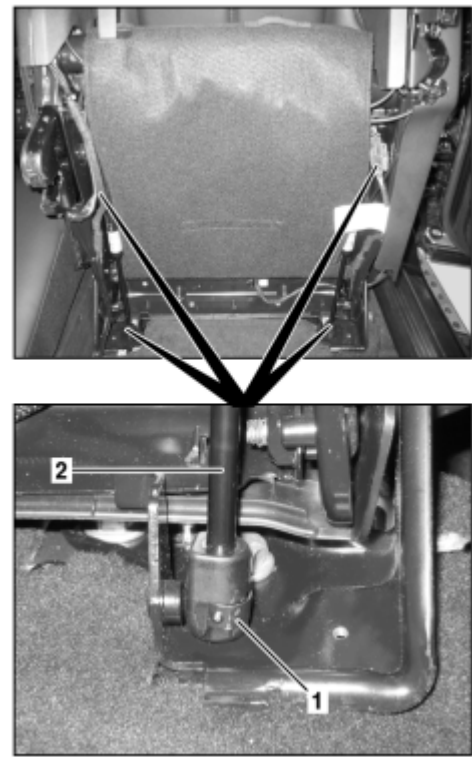

P91.12-2998-03

	Remove/install		
Danger!	Only remove and install gas-operated struts when they are not under tension and when the components are properly secured.		AS00.00-Z-0012-01A
1	Lift up retainers (1) at gas-operated strut (2), unhook gas-operated strut (2)	Do not remove retainers (1),	

		otherwise tension can be lost.	
		i Observe installation position of gas-operated strut (2).	
		i If required, replace gas-operated strut (2) and dispose of gas-operated strut (2) (old part), see: ↓	
 OS		Degas and drain gas-operated strut	OS00.00-P-1001-01A
2	Install in the reverse order		