


AR72.29-P-0110GZ	Remove/install front door power window switch group	18.11.05
------------------	---	----------

MODEL 164





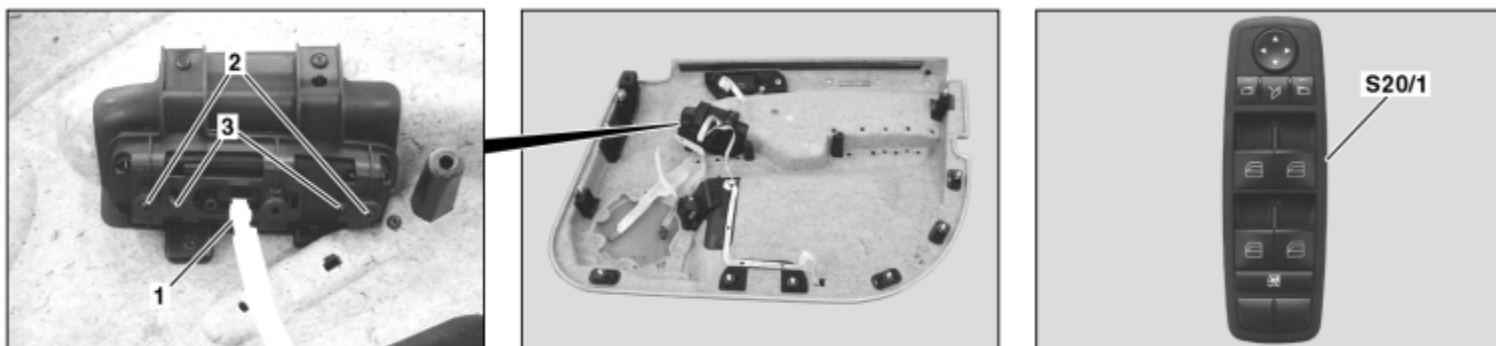



P72.29-2341-07

Shown on model 164.1

1 Electrical connector
2 Bolts
3 Clips

S20/1 Driver power window and outside mirror adjustment switch group

	Remove/install		
1	Remove front door lining	 Driver side.	AR72.10-P-1000GZ
		 Lay door lining front side down on suitable subsurface to prevent damage!	
2	Disconnect electrical connector (1)	 Treat ribbon cable carefully to prevent damage	
3	Unscrew bolt (2)	 Treat ribbon cable carefully to prevent damage	
		 On model 164.8, the right bolt is located below a ribbon cable bracket.	

4	Loosen clips (3), remove driver power window and outside mirror adjustment switch group (S20/1)		
5	Install in the reverse order		
6	Perform a function test		