


MODEL 164


Shown on model 164.1

- 1 Nuts
- 2 Front section of fender liner
- 3 Expansion rivets
- 4 Bolts

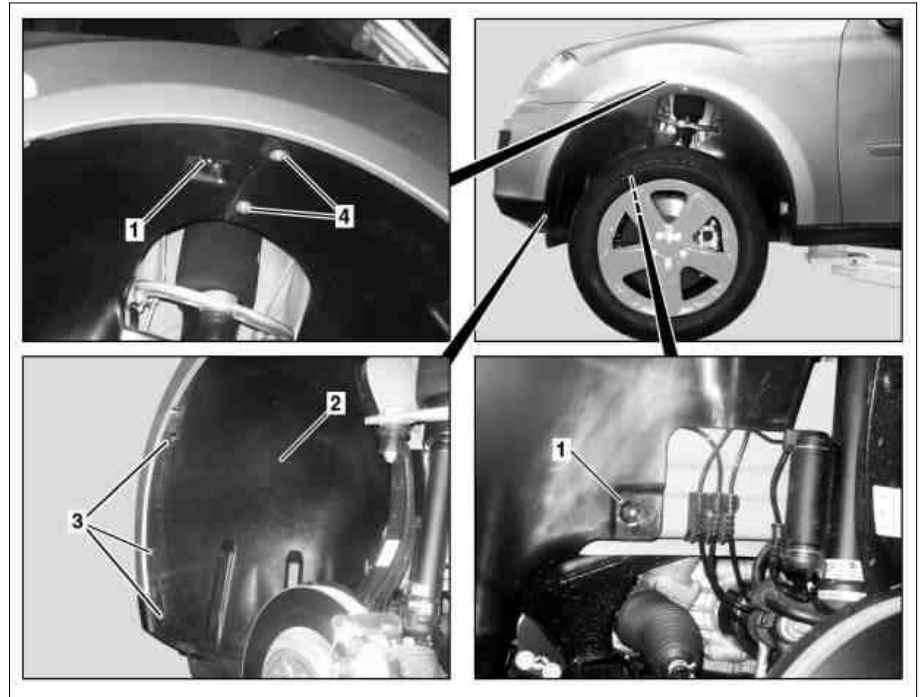

P88.10-2139-06

☒ ☒	Remove/install		
<p>⚠ Danger!</p>	<p>Risk of death caused by vehicle slipping or toppling off of the lifting platform.</p>	<p>Align vehicle between the columns of the lifting platform and position the four support plates at the lifting platform support points specified by the vehicle manufacturer.</p>	<p>AS00.00-Z-0010-01A</p>
1	Lift/jack up vehicle		AR00.60-P-1000GZ
2	Unscrew bolts of fender liner front section (2) on bumper.		
3	Unscrew nuts (1).		
4	Remove expansion rivets (3)		
5	Remove screws (4)		
6	Lift rear section of fender liner in fender.	<p>i Lift rear section of fender liner at top overlap with mounting wedge until front section of fender liner (2) can be removed from fender.</p> <p>☑ Mounting wedge</p>	*110589035900
7	Remove front section of fender liner (2) from fender		
8	Install in the reverse order		



110 589 03 59 00

Mounting wedge