

MODEL 164


1 Center console



P68.20-3315-01


Shown on vehicle with USA version, code 494

- 2 Ashtray housing
- 3 Beverage holder

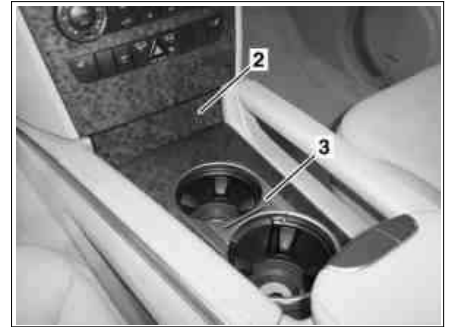

P68.20-3316-01

- 4 Armrest
- 5 Bolt caps
- 6 Bolts

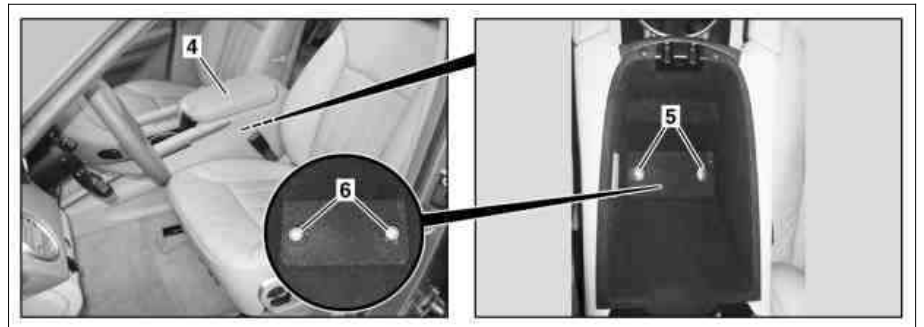




P68.20-3317-04




P68.20-3318-07

- 7 Bolts
- 8 Clamp
- 9 Electrical connector
- 10 Electrical connector
- 11 Electrical connector
- 12 Electrical connector

 	Remove/install		
1	Remove ashtray housing (2) at front on center console (1)	i Installation: Check ashtray housing mechanism (2) for proper function, if necessary loosen threaded connection of center console (1) and tighten center console (1) without tension.	AR68.20-P-2400GZ
2	Remove front beverage holder (3)		AR68.20-P-2240GZ
3	Completely move front seats toward rear		

4	Switch off ignition and remove the transmitter key from the EIS [EZS] control unit	i On vehicles with code 889 Keyless-Go: Press Keyless-Go start/stop button repeatedly until the ignition is switched off. Remove transmitter key from vehicle and store it in a location beyond its transmission range (at least 2 m).	
5	Unlock armrest cover and position vertically		
6	Unclip bolt caps (5)		*115589035900
7	Remove bolts (6)	i Installation: Ensure that center console (1) is installed without tension.	
8	Remove bolts (7)	i Installation: Ensure that center console (1) is installed without tension.	
9	Unclip clip (8)	i Unclip upward.	
10	Disconnect electrical connector (9, 10, 11, 12)		
11	Pull center console (1) toward rear, lift and remove	i Remove through front door.	
12	Install in the reverse order		



115 589 03 59 00

Long wedge