


MODEL 164

Shown on model 164.1

- 1 Fender liner in front fender
- 2 Nuts
- 3 Expansion rivets

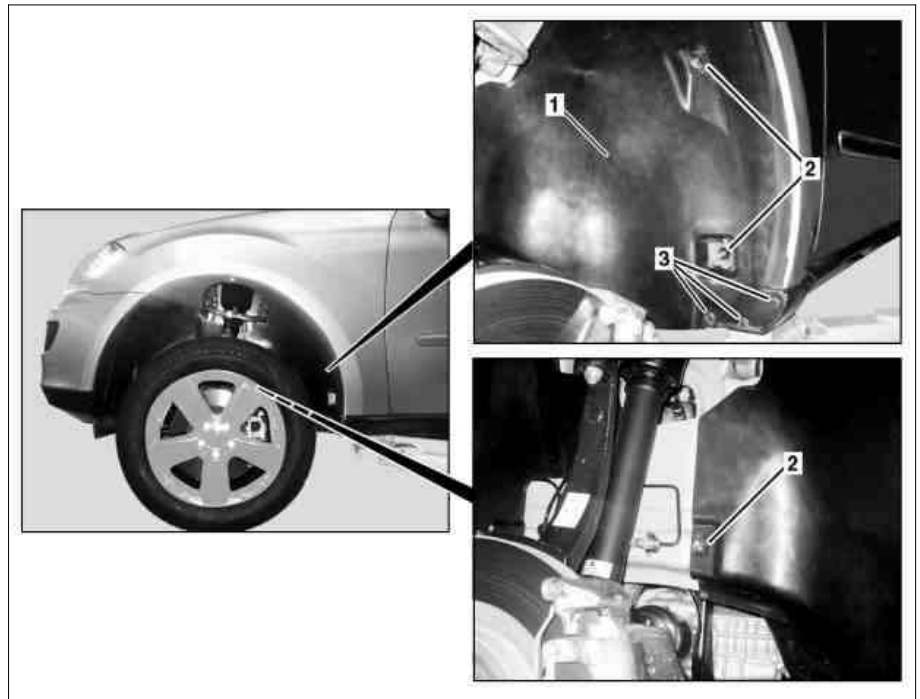

P88.10-2140-06

☒ ☒	Remove/install		
⚠ Danger!	Risk of death caused by vehicle slipping or toppling off of the lifting platform.	Align vehicle between the columns of the lifting platform and position the four support plates at the lifting platform support points specified by the vehicle manufacturer.	AS00.00-Z-0010-01A
1	Lift/jack up vehicle		AR00.60-P-1000GZ
2	Remove fender liner front section in front fender (1)		AR88.10-P-1310GZ
3	Unscrew nuts (2).		
4	Remove expansion rivets (3)		
5	Remove fender liner in front fender (1).	i Installation: Ensure that fender liner is seated correctly in front fender.	
6	Install in the reverse order		