


MODEL 164

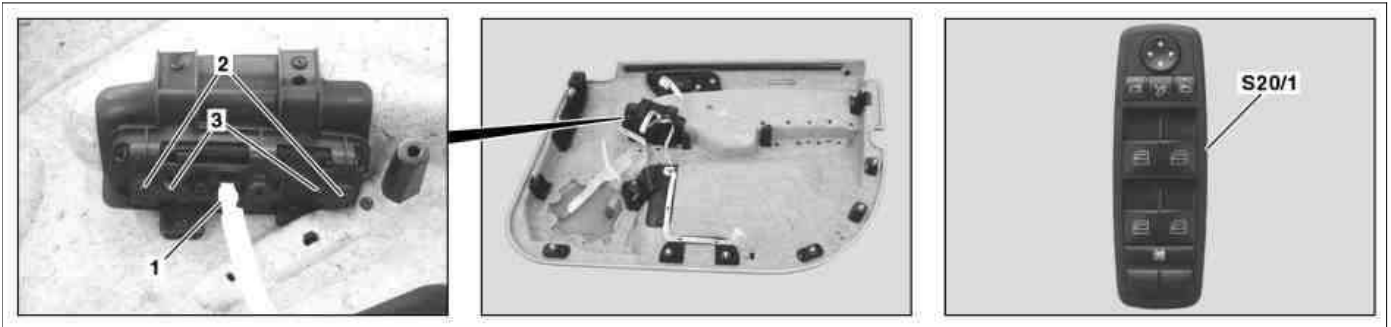

P72.29-2341-07

Shown on model 164.1

- 1 Electrical connector
 2 Bolts
 3 Clips

S20/1 Driver power window and outside mirror adjustment switch group

☒ ☒	Remove/install		
1	Remove front door lining	<p>i Driver side.</p> <p>⚠ Lay door lining front side down on suitable subsurface to prevent damage!</p>	AR72.10-P-1000GZ
2	Disconnect electrical connector (1)	<p>⚠ Treat ribbon cable carefully to prevent damage</p>	
3	Unscrew bolt (2)	<p>⚠ Treat ribbon cable carefully to prevent damage</p> <p>i On model 164.8, the right bolt is located below a ribbon cable bracket.</p>	
4	Loosen clips (3), remove driver power window and outside mirror adjustment switch group (S20/1)		
5	Install in the reverse order		
6	Perform a function test		