


Model 166, 292

- 1 Beverage holder
- 1a Guide
- 2 Center console
- 3 Bolts
- 4 Electrical connector

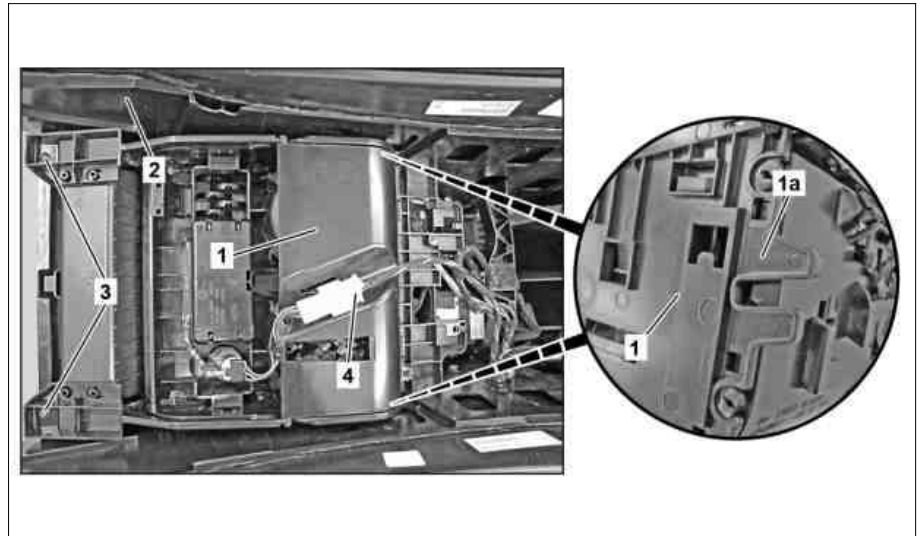

P68.20-4464-05

☒ ☒	Remove/install		
1	Remove center console (2)		AR68.20-P-2000GQ
2	Disconnect electrical connection (4)		
3	Remove bolts (3)		
4	Pull beverage holder (1) toward rear out of center console (2) and remove	i Installation: Ensure that guides (1a) are seated correctly in center console (2).	
5	Install in the reverse order		