

Model all (4xWD, BUS, CAR, Heavy transporter, Light transporter, TRUCK, UNIMOG, smart)

Verwendung in FG


01/03/05/07/08/14/15/22/25/26/27/28/31/32/33/35/41/42/46/47/49/54/55/61/62/72/83/Satz B

Purpose:

Universal transmission jack for lifting and for mounting and disassembly of major assemblies or other components.

Reference information:

This criteria catalog serves to provide support for selection of variants of workshop equipment available on the free market. It just describes the minimum requirement for fulfilling the Mercedes-Benz standard. There is therefore no reference made to manufacturer specific equipment or devices.

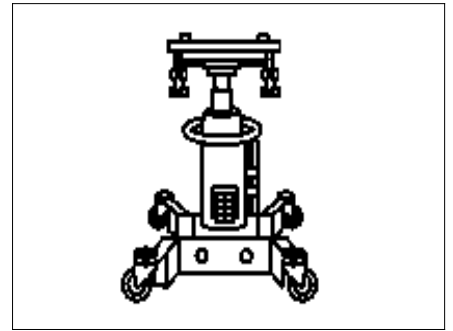

000 588 11 62 00

Note:

Observe for ordering purposes that the standard dimension is 35 mm; this can be achieved if necessary using an adapter.

Use in combination with a suitable attachment (for example: transmission plate).

Minimum requirements:

- Mercedes-Benz standard diameter for mounting hole: 35 mm

- Minimum load carrying capacity for transporter: 1.0 t
- Minimum load carrying capacity for commercial vehicle: 2.0 t