


| | | | |
|--------------------|--|---|--------------------|
| AR00.60-P-0100-01A | Secure vehicle on vehicle lift with support arms | | |
| | Risk of death caused by vehicle slipping or toppling off of the lifting platform. | Align vehicle between vehicle lift columns and position the four support plates at the vehicle lift support points specified by the vehicle manufacturer. | AS00.00-Z-0010-01A |
| | Information on influencing load ratios when removing major assemblies | | AH00.60-P-0001-01A |
| WS | 000 588 00 80 00 Vehicle lift | | WS00.00-P-0040B |

Model 117, 118, 123, 124, 126, 156, 164, 166, 168, 169, 171, 172, 176, 177, 190, 197, 203, 204, 205, 207, 209, 211, 212, 213, 216, 217, 218, 219, 221, 222, 223, 231, 238, 242, 245, 246, 247, 251, 253, 257, 290, 292


Model 167
except code M036 (Maybach version)

Model 167
with code M036 (Maybach version)
Running boards not installed




169 589 02 31 01

Supports




169 589 02 31 00

Vehicle hoist securing tool

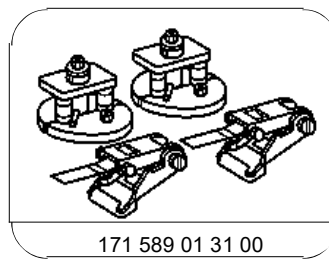


171 589 01 31 00

Vehicle hoist securing tool



253 589 00 31 00

Vehicle lift safety device

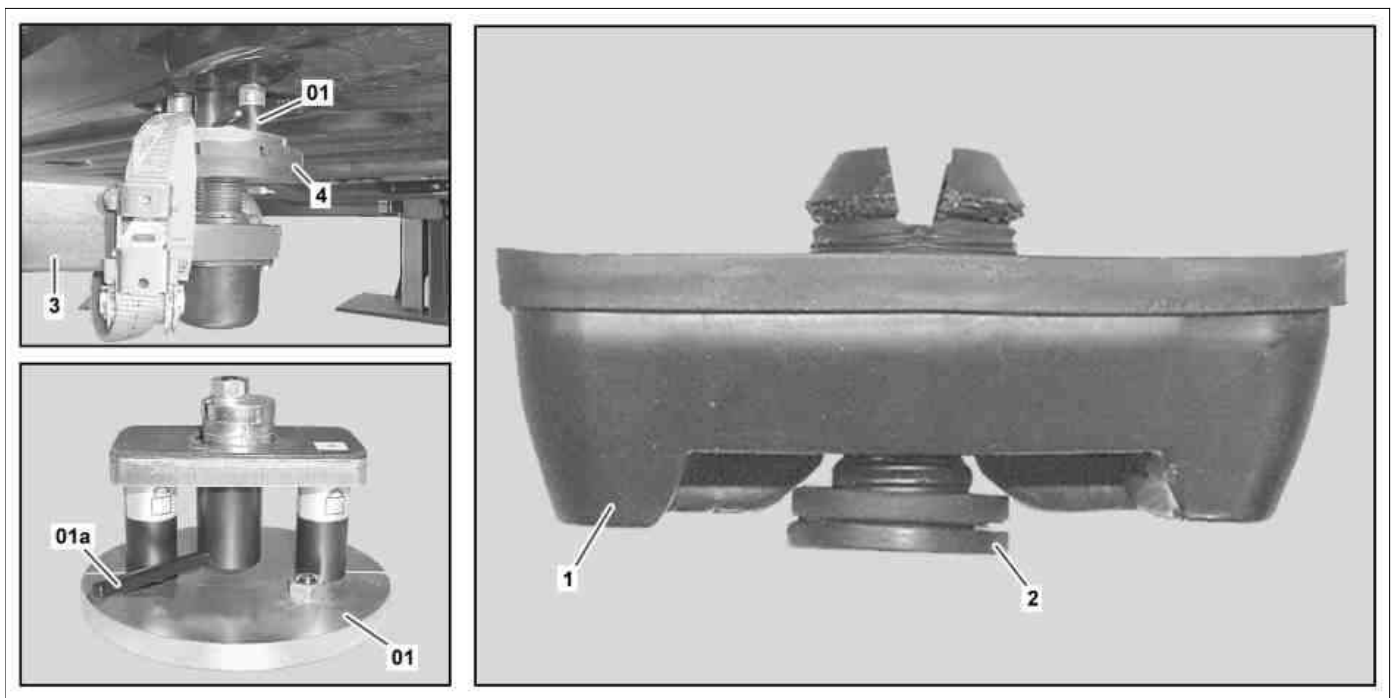

P00.60-2235-09





1 Remove plastic screws (2) from vehicle lift support point (1).


2 Pry vehicle lift support point (1) out of longitudinal members.

Do not use sharp-edged tools. Otherwise this can result in damage to the longitudinal member.


5 Adjust support plates (4) of vehicle lift swivel arms (3) to height of vehicle lift safety devices (01) or to height of remaining vehicle lift support points (1).

Turn the support plates (4) until they make contact with the vehicle lift safety devices (01) or the vehicle lift support points (1) of the longitudinal members.

- 3 Insert vehicle lift safety devices (01) into longitudinal members.
 Model 117, 118, 156, 166, 171, 172, 176, 177, 203, 204, 205, 207, 209, 211, 212, 213, 216, 217, 218, 219, 221, 222, 223, 231, 238, 242, 246, 247, 253 (except 253.992/993), 257, 290, 292
 Model 167
 except code M036 (Maybach version)
 Model 167
 with code M036 (Maybach version) Running boards not installed  Vehicle lift safety device 171 589 01 31 00
 Model 164, 166, 168, 169, 190, 197, 245, 251, 292 
 Vehicle lift safety device 169 589 02 31 00
 Model 164, 166, 168, 169, 190, 197, 245, 251, 292 
 Vehicle lift safety device 169 589 02 31 01
 Model 253.992/993  Vehicle lift safety device 253 589 00 31 00

 Always attach vehicle lift safety devices (01) in pairs at two positions in longitudinal members of vehicle.

- 4 Swivel levers (01a) of vehicle lift safety devices (01) to the right.

 The vehicle lift safety devices (01) are then locked onto the longitudinal members.

- 6 Lift vehicle with lifting platform.
- 7 Lash down vehicle lift safety devices (01) on vehicle lift swivel arms (3) using tensioning straps.
- 8 Remove in the reverse order.