


MODEL 164


Front seat removed for better illustration.
Shown on model 164.1

- 1 Front floor covering
- 2 Center console

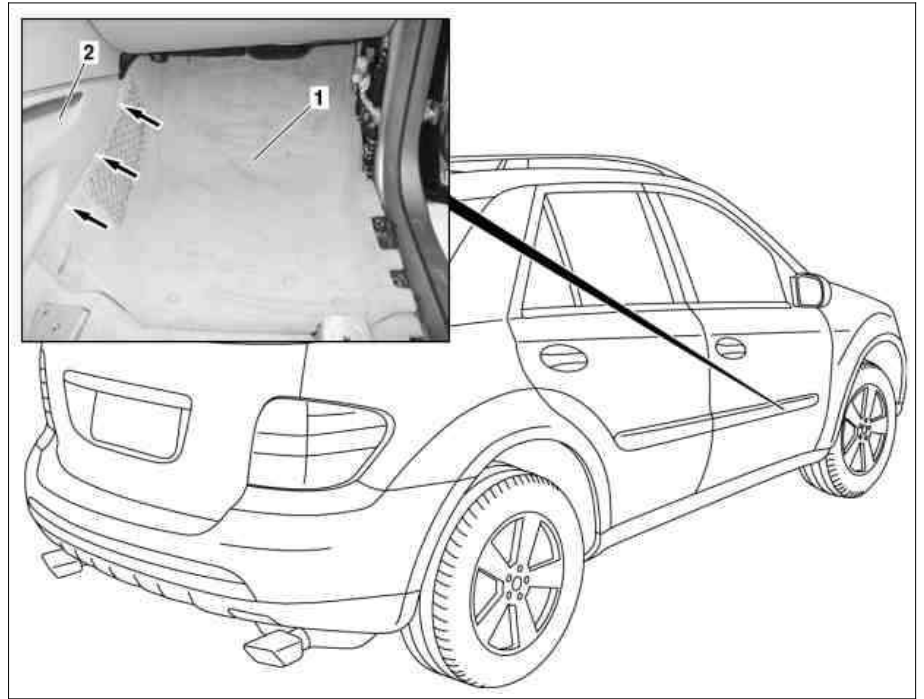

P68.20-3256-06

☒ ☒	Remove/install		
1	Move front passenger seat toward rear		
2	Remove paneling in footwell.	<input type="checkbox"/> Right side only.	AR68.30-P-4010GZ
3	Move out front floor coverings (1) below center console (2)	<input checked="" type="checkbox"/> Installation: Carefully raise center console (2) with mounting wedge (arrows) to prevent damage <input checked="" type="checkbox"/> Mounting wedge	*110589035900
4	Remove front floor coverings (1)	<input type="checkbox"/> Right side only. Remove through front door	
5	Install in the reverse order		

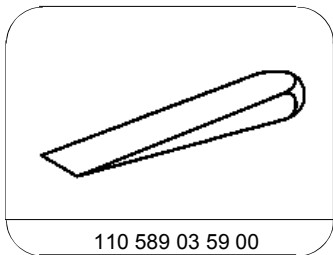

110 589 03 59 00

Mounting wedge