


Model 164 with engine 629, 642

Shown on model 164.1

- 1 Bolts
- 2 Front bottom section of soundproofing
- 3 Rear soundproofing bottom section

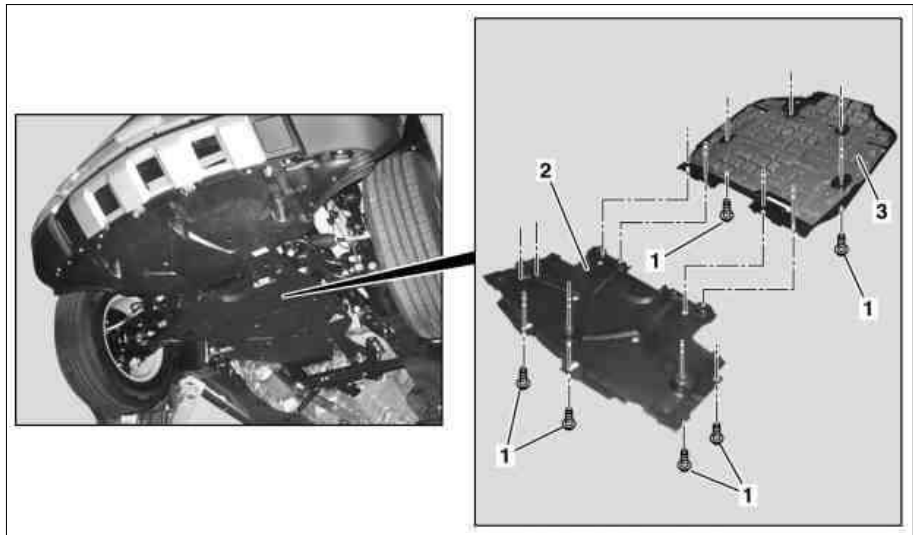

P94.30-2021-05

☒ ☒	Remove/install		
	Risk of death caused by vehicle slipping or toppling off of the lifting platform.	Align vehicle between vehicle lift columns and position the four support plates at the vehicle lift support points specified by the vehicle manufacturer.	AS00.00-Z-0010-01A
1 WS	Lift vehicle with two-post lift 000 588 00 80 00 Vehicle lift		AR00.60-P-1000GZ WS00.00-P-0040B
2	Remove bolt (1)	i 15 bolts (1).	
3.1	Remove front soundproofing bottom section (2) and rear soundproofing bottom section (3)	Model 164 without code (430) Offroad package i The sections can also be removed separately.	
3.2	Remove underide guard plate	Model 164 with code (430) Offroad package	AR88.30-P-0010GZ
4	Install in the reverse order		