


MODEL 164

Shown on vehicle with offroad package, code 430

- 1 Instrument panel center section
- 2 Electrical connector
- 3 Screws

N72 Lower control panel control unit

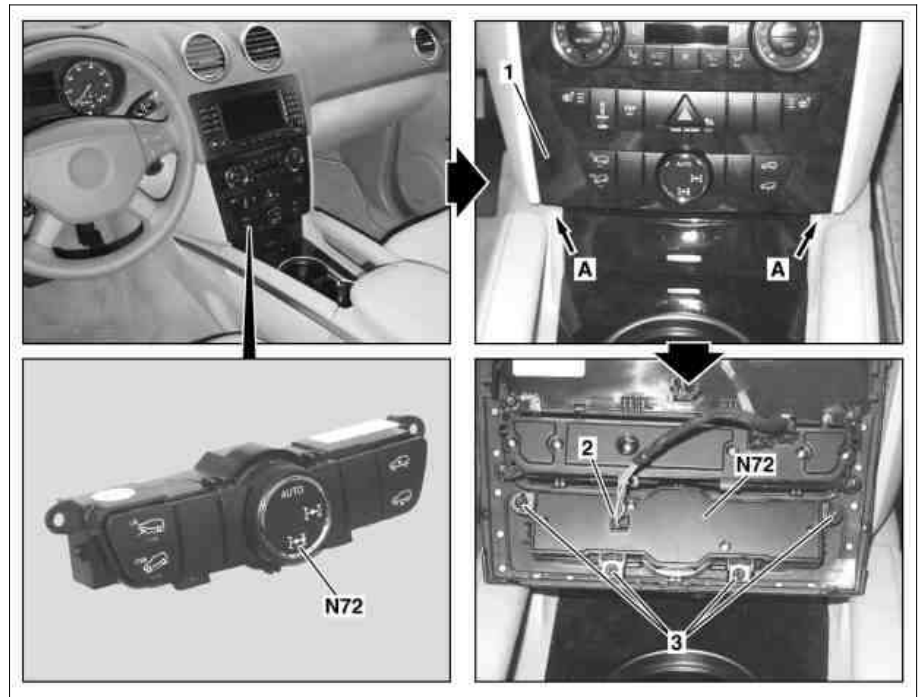

P54.21-2489-06

	Remove/install		
	Information on preventing damage to electronic components due to electrostatic discharge	All models	AH54.00-P-0001-01A
1	Switch off ignition and remove the transmitter key from the EIS [EZS] control unit	On vehicles with Keyless Go, code 889: Press Keyless Go start/stop button repeatedly until ignition is switched off. Remove transmitter key from vehicle and store it in a location beyond its transmission range (at least 2 m).	
2	Disengage instrument panel center part (1) at bottom edge (arrows A) and pull forward out of instrument panel	Protect trim parts of the instrument panel and center console from scratches.	
3	Disconnect electrical connector (2)		
4	Remove screws (3) and remove lower control panel control unit (N72)		
5	Install in the reverse order		