


MODEL 164


Shown on model 164.1

- 1 Nuts
- 2 Front section of fender liner
- 3 Expansion rivets
- 4 Bolts

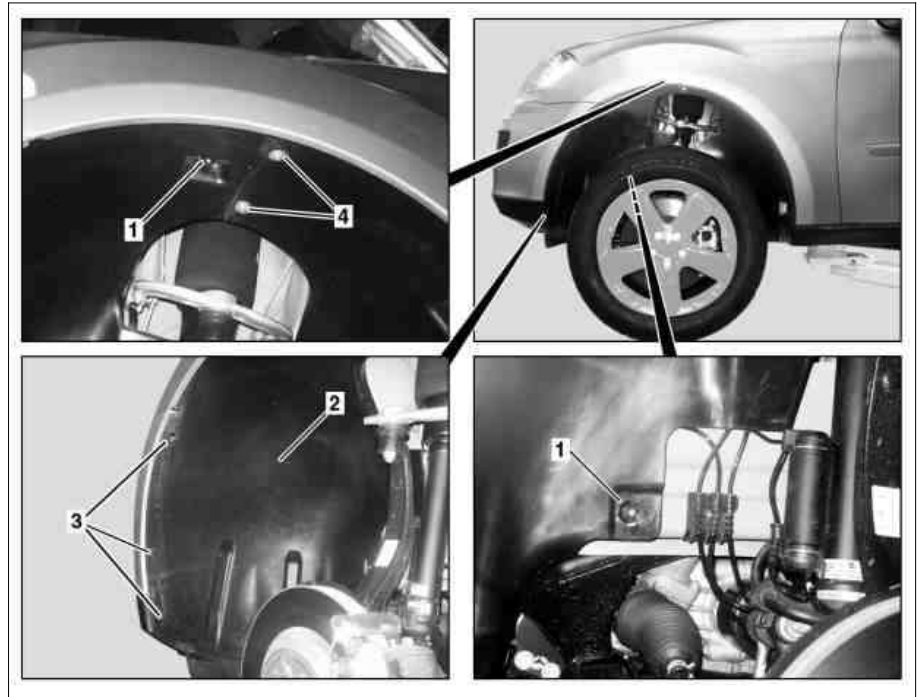

P88.10-2139-06

| | | | |
|---|--|--|--------------------|
| | Remove/install | | |
| | Risk of death caused by vehicle slipping or toppling off of the lifting platform. | Align vehicle between the columns of the lifting platform and position the four support plates at the lifting platform support points specified by the vehicle manufacturer. | AS00.00-Z-0010-01A |
| 1 | Lift/jack up vehicle | | AR00.60-P-1000GZ |
| 2 | Unscrew bolts of fender liner front section (2) on bumper. | | |
| 3 | Unscrew nuts (1). | | |
| 4 | Remove expansion rivets (3) | | |
| 5 | Remove screws (4) | | |
| 6 | Lift rear section of fender liner in fender. | <p> Lift rear section of fender liner at top overlap with mounting wedge until front section of fender liner (2) can be removed from fender.</p> <p> Mounting wedge</p> | *110589035900 |
| 7 | Remove front section of fender liner (2) from fender | | |
| 8 | Install in the reverse order | | |



110 589 03 59 00

Mounting wedge