


Model 164, 166, 292

Shown on model 292

1 Battery ground line

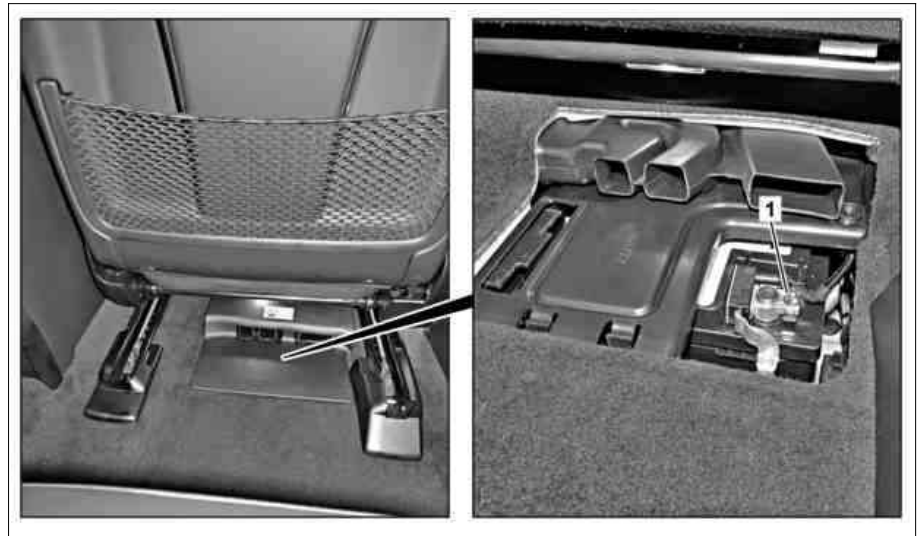

P54.10-4263-05

<p>⚠ Danger!</p>	<p>Risk of explosion from explosive gas. Risk of poisoning and caustic burns from swallowing battery electrolyte. Risk of injury through burns to skin and eyes from battery acid or when handling damaged lead-acid batteries</p>	<p>No fires, sparks, open flames or smoking. Wear acid-resistant gloves, clothing and glasses. Only pour battery acid into suitable and appropriately marked containers.</p>	<p>AS54.10-Z-0001-01A</p>
	<p>Check</p>		
<p>1</p>	<p>Check battery</p>		<p>AR54.10-P-1129GZ</p>
<p>2</p>	<p>Disconnect ground line of battery (1)</p>	<p>When the vehicle is laid up for more than 4 weeks.</p> <p>i This prevents any battery discharge caused by no-load current consumers.</p>	<p>AR54.10-P-0003GZ</p>
<p>3</p>	<p>Disconnect ground cable from additional battery</p>	<p>When the vehicle is laid up for more than 4 weeks.</p> <p>i This prevents any battery discharge caused by no-load current consumers.</p>	
<p>4</p>	<p>Charge battery</p>	<p>i When battery is disconnected every 6 months at the latest and when the battery is connected every 6 weeks at the latest.</p>	<p>AR54.10-P-1130GZ</p>