


- MODEL 164**  
with CODE 218 (Rear view camera)  
with CODE 498 (Japanese version)  
without CODE 849 (Spare wheel carrier)
- MODEL 207, 212**  
up to model year 2014  
with CODE 218 (Rear view camera)  
with CODE 498 (Japanese version)
- MODEL 216.3, 221.0**  
with CODE 218 (Rear view camera)  
with CODE 498 (Japanese version)
- MODEL 218.3**  
up to model year 2013  
with CODE 218 (Rear view camera)  
with CODE 498 (Japanese version)
- MODEL 221.1**  
with CODE 218 (Rear view camera)  
with CODE 498 (Japanese version)
- MODEL 251**  
with CODE 218 (Rear view camera)  
with CODE 498 (Japanese version)







Shown on model 251

- 1 Calibration template  
2 Calibration template  
A Dimension  
B Dimension  
C Dimension

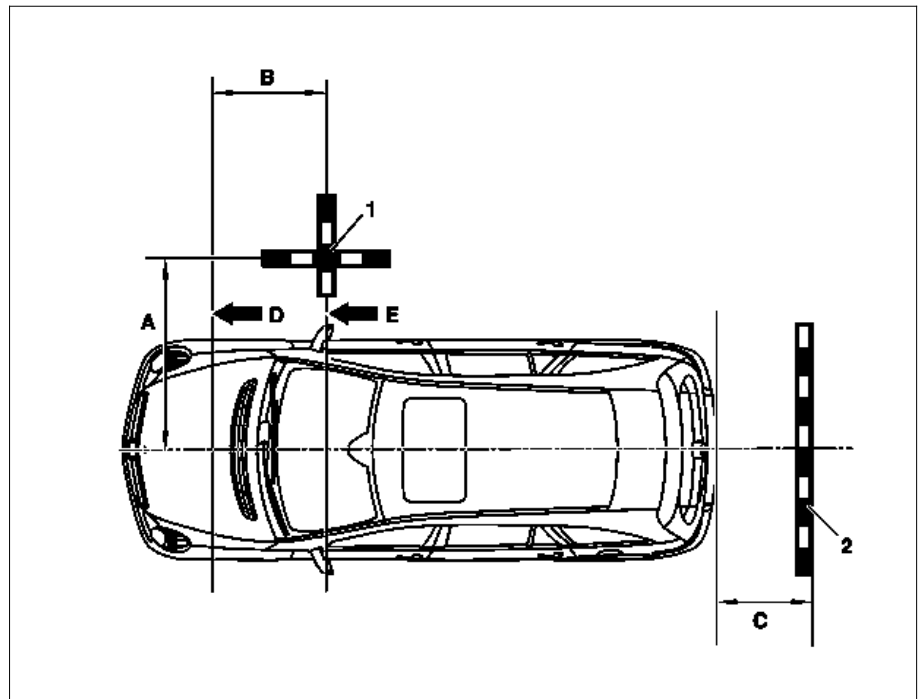

P54.65-5515-06

<b>i</b>	Notes on calibration of reversing camera		AH54.65-P-0022-01SX
	<b>Calibrate backup camera</b>		
1	Drive the vehicle onto a level surface and place the front wheels in the straight-ahead position	<b>i</b> The suspension level must be on drive mode.	
2	Close trunk lid or liftgate		
3	Close front passenger door.		
4	Move front passenger mirror into drive mode.	MODEL 164 with CODE 218 (Rear view camera) with CODE 498 (Japanese version) without CODE 849 (Spare wheel carrier) MODEL 251 with CODE 218 (Rear view camera) with CODE 498 (Japanese version) When calibrating the front passenger outside mirror reversing camera.	

5	Align calibration template (1) according to dimensions (A and B) parallel to the front axle (arrow D) and the vehicle's longitudinal axis, and in the center to the front passenger outside mirror (arrow E) on the floor   WF	MODEL 164 with CODE 218 (Rear view camera) with CODE 498 (Japanese version) without CODE 849 (Spare wheel carrier) MODEL 251 with CODE 218 (Rear view camera) with CODE 498 (Japanese version) When calibrating the front passenger outside mirror reversing camera.   Dimension (A): 1500 mm Dimension (b): 1000 mm	WF58.50-P-5465-01EL
6	Align calibration template (2) according to dimension (C) parallel to the vehicle lateral axis and central to the vehicle on the floor Template for calibration of reversing camera   WF	When calibrating the reversing camera in the trunk lid or the liftgate.   Dimension (C): 1000 mm	WF58.50-P-5465-01EL
7	Place ignition on position "2"		
8	Calibrate front passenger outside mirror reversing camera or the reversing camera in the trunk lid or in the liftgate with diagnostic system   AD	 Instructions under menu item "backup camera control unit".	AD00.00-P-2000-04A