


MODEL 164


Shown on model 164.1

- 1 Fender liner in rear fender
- 2 Nuts
- 3 Expansion rivets

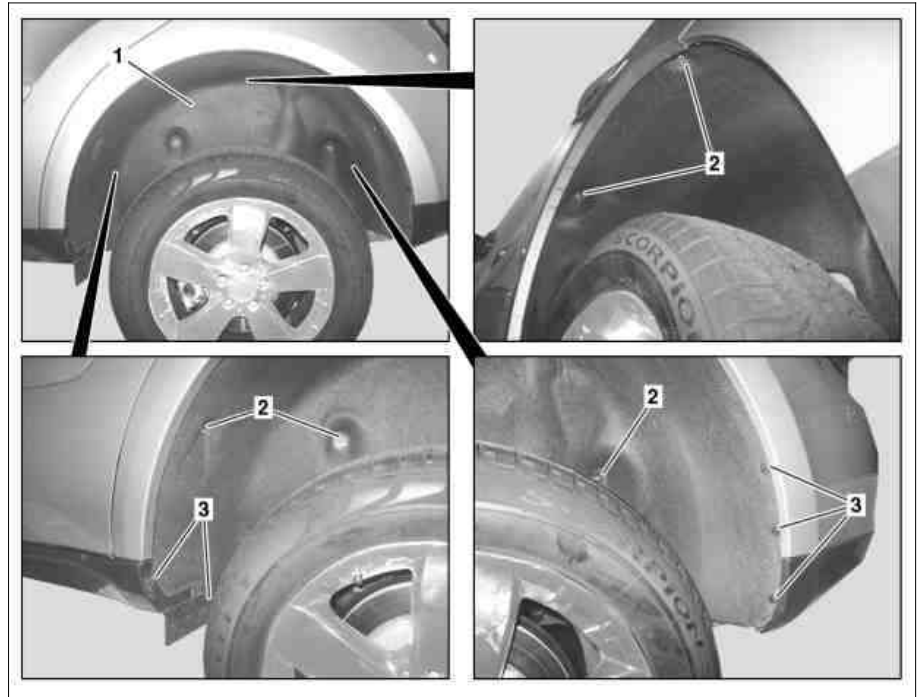

P88.10-2141-06

☒ ☒	Remove/install		
1	<b>Risk of death</b> caused by vehicle slipping or toppling off of the lifting platform.  Lift/jack up vehicle	Align vehicle between the columns of the lifting platform and position the four support plates at the lifting platform support points specified by the vehicle manufacturer.	AS00.00-Z-0010-01A  AR00.60-P-1000GZ
2	Unscrew nuts (2).	<ul style="list-style-type: none"> <li><b>i</b> On model 164.1 unscrew three nuts (2).</li> <li><b>i</b> On model 164.8 unscrew two nuts (2).</li> </ul>	
3	Remove expansion rivets (3)	<ul style="list-style-type: none"> <li><b>i</b> On model 164.1 remove three expansion rivets (3) at rear.</li> <li><b>i</b> On model 164.8 remove six expansion rivets (3) at rear.</li> </ul>	
4	Loosen fender liner in rear fender (1) from rear fender with mounting wedge.	<ul style="list-style-type: none"> <li><b>i</b> <b>Installation:</b> Ensure that fender liner is seated correctly in rear fender.</li> <li><b>☑</b> Mounting wedge</li> </ul>	*110589035900
5	Install in the reverse order		

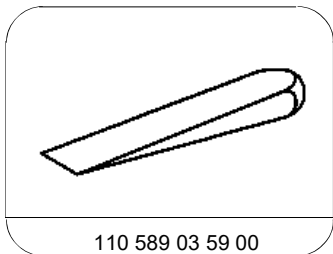

110 589 03 59 00

Mounting wedge