


MODEL 164

Shown on right-hand side

- 1 Front door sill molding
2 Rear door sill molding

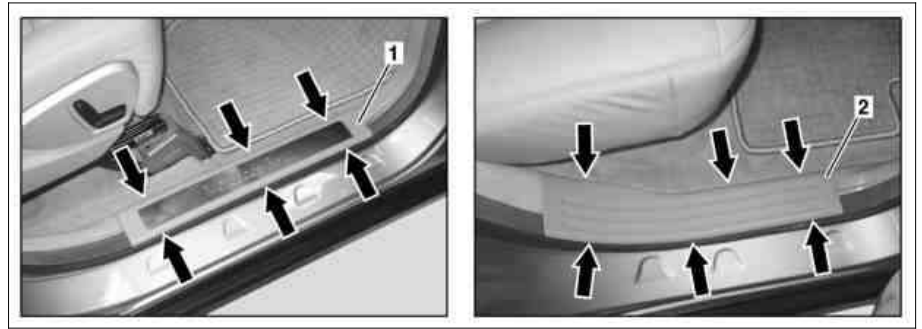

P68.30-3022-04

| ☒ ☒ | Remove/Install | | |
|-----|--|--|--|
| 1 | Completely open front and rear door | | |
| 2 | Unclip front door sill molding (1) and rear door sill molding (2) upward from retaining clips (arrows) by hand and remove. | i Installation: Replace damaged retaining clips. | |
| 3 | Install in the reverse order | | |