


Model 166, 292

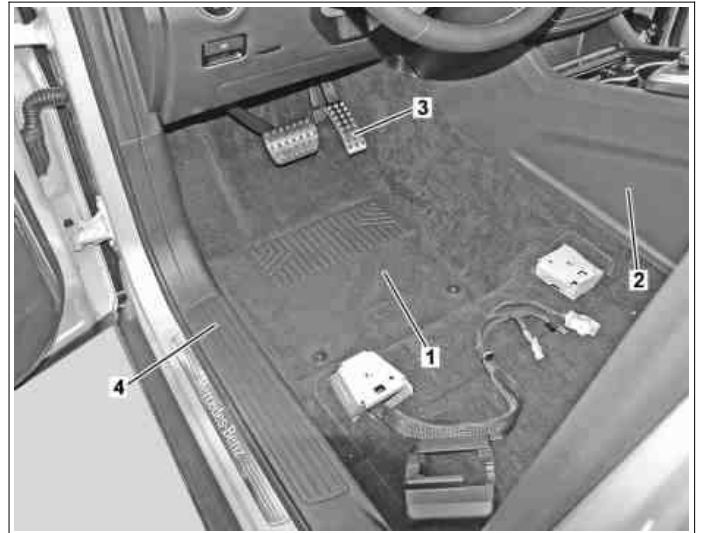


## Modification notes

4.1.16	Release front seat but do not remove.	Operation step 1	
4.1.16	New operation step inserted.	Operation step 2	

- 1 Floor covering
- 2 Center console
- 3 Accelerator pedal
- 4 Door sill



P68.20-4458-11

 	Remove/install		
1	Release left front seat		AR91.10-P-1000GQ
2	Slide left front seat backwards as far as possible and fold back		
3	Remove left front door sill (4)		AR68.30-P-4100GQ
4	Remove accelerator pedal (3)		AR30.12-P-1321GZ
5	Slightly lift floor covering (1) at entrance		
6	Pull floor covering (1) out below center console (2)		
7	Remove floor covering (1)	 <b>Installation:</b> Ensure that floor covering (1) is laid correctly.	
8	Install in the reverse order		