






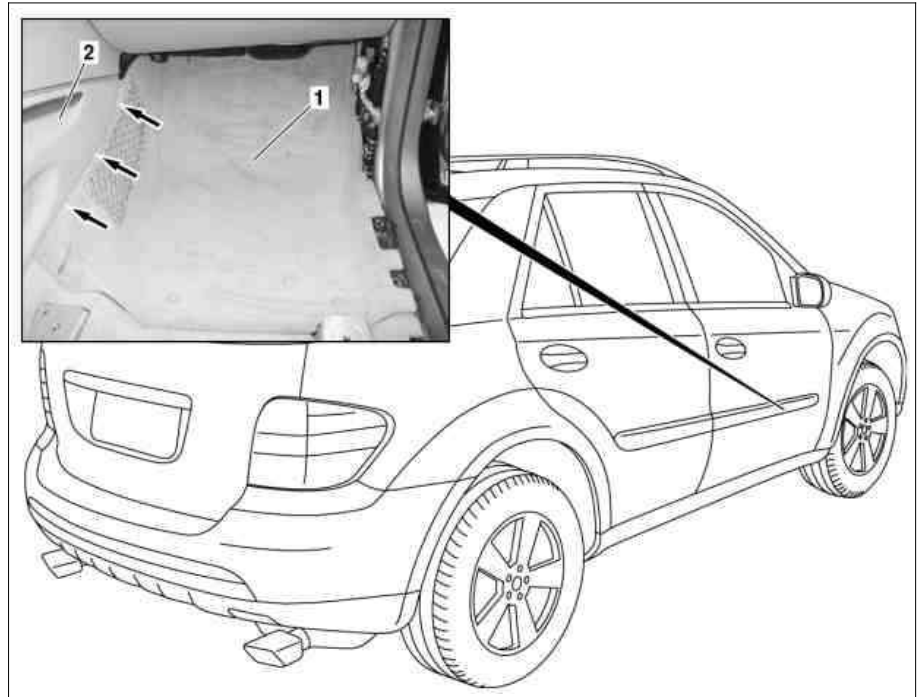

MODEL 164


Front seat removed for better illustration.  
Shown on model 164.1

- 1 Front floor covering  
2 Center console



P68.20-3256-06

 	Remove/install		
1	Move front passenger seat toward rear		
2	Remove paneling in footwell.	 Right side only.	AR68.30-P-4010GZ
3	Move out front floor coverings (1) below center console (2)	 <b>Installation:</b> Carefully raise center console (2) with mounting wedge (arrows) to prevent damage  Mounting wedge	*110589035900
4	Remove front floor coverings (1)	 Right side only. Remove through front door	
5	Install in the reverse order		



110 589 03 59 00

Mounting wedge