


## MODEL 166

- 1 Beverage holder
- 1a Guide
- 2 Center console
- 3 Bolts
- 4 Electrical connector

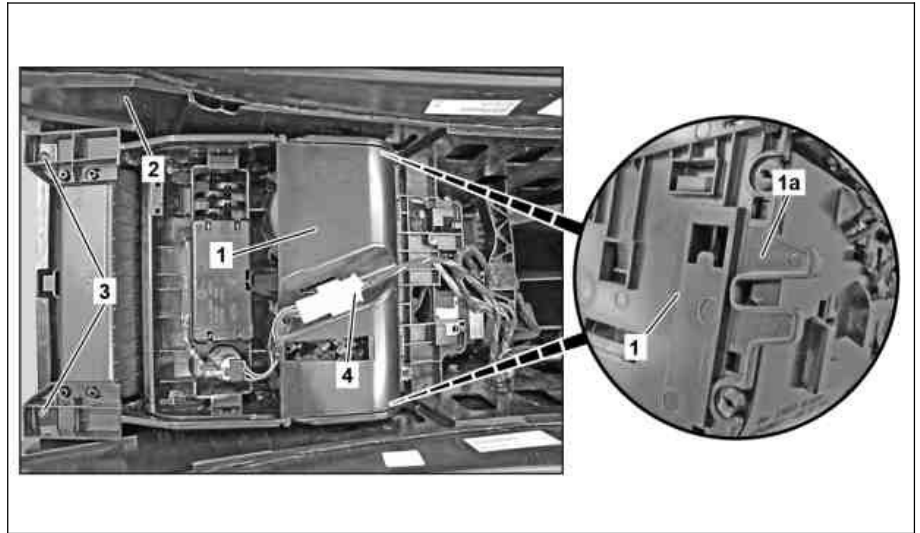

P68.20-4464-05

↕ ↘	↖ ↗	Remove/install	
1		Remove center console (2)	AR68.20-P-2000GQ
2		Disconnect electrical connector (4)	
3		Remove bolt (3)	
4		Pull beverage holder (1) toward rear out of center console (2) and remove	<b>i</b> <b>Installation:</b> Ensure that guides (1a) are seated correctly in center console (2).
5		Install in the reverse order	