






Broken piece in question
(already repaired at time
of picture)



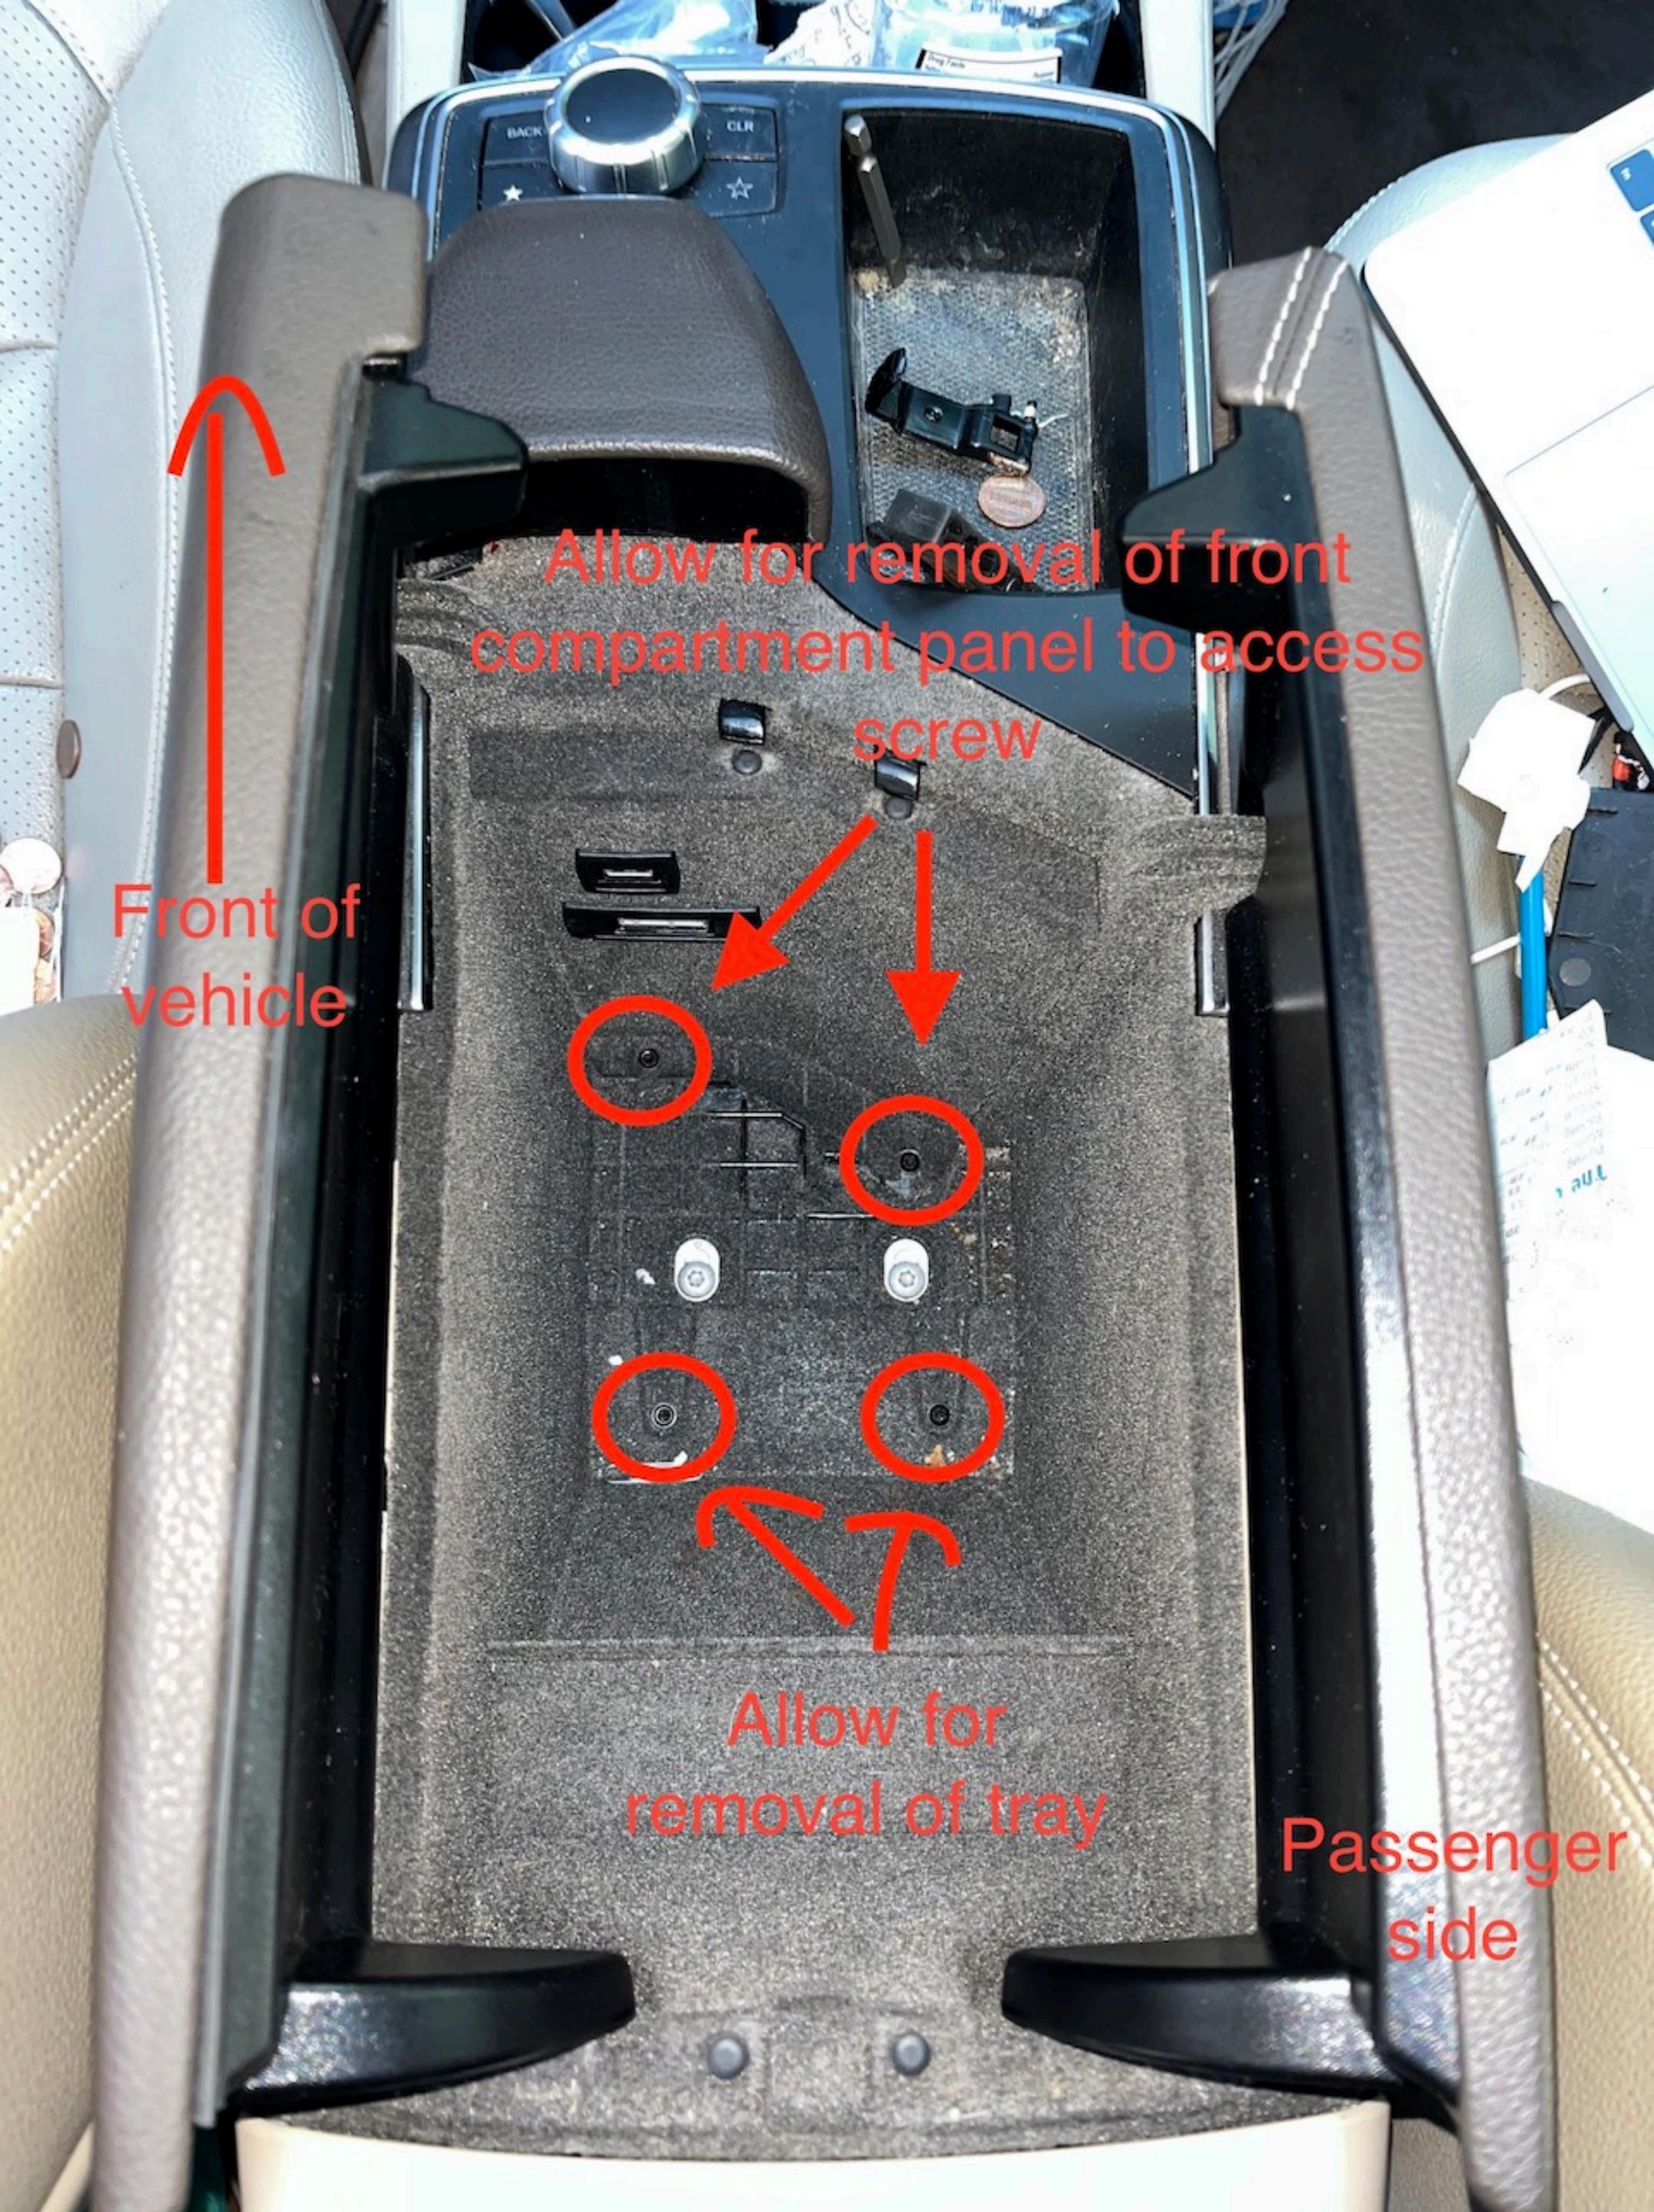

Allow for removal of front compartment panel to access screw

Front of vehicle

Allow for removal of tray

Passenger side



Single screw to be removed in this area

Front panel in console compartment unscrewed and pulled back



Single screw to remove



Back of
center
console

I believe this is where the "two/three paper method" previously mentioned was used. Basically a maneuver to release the mechanism of the pop out tray. I used a flathead screwdriver to pop it open


Pop out tray



Back of center console

Tray released and opened to access screws



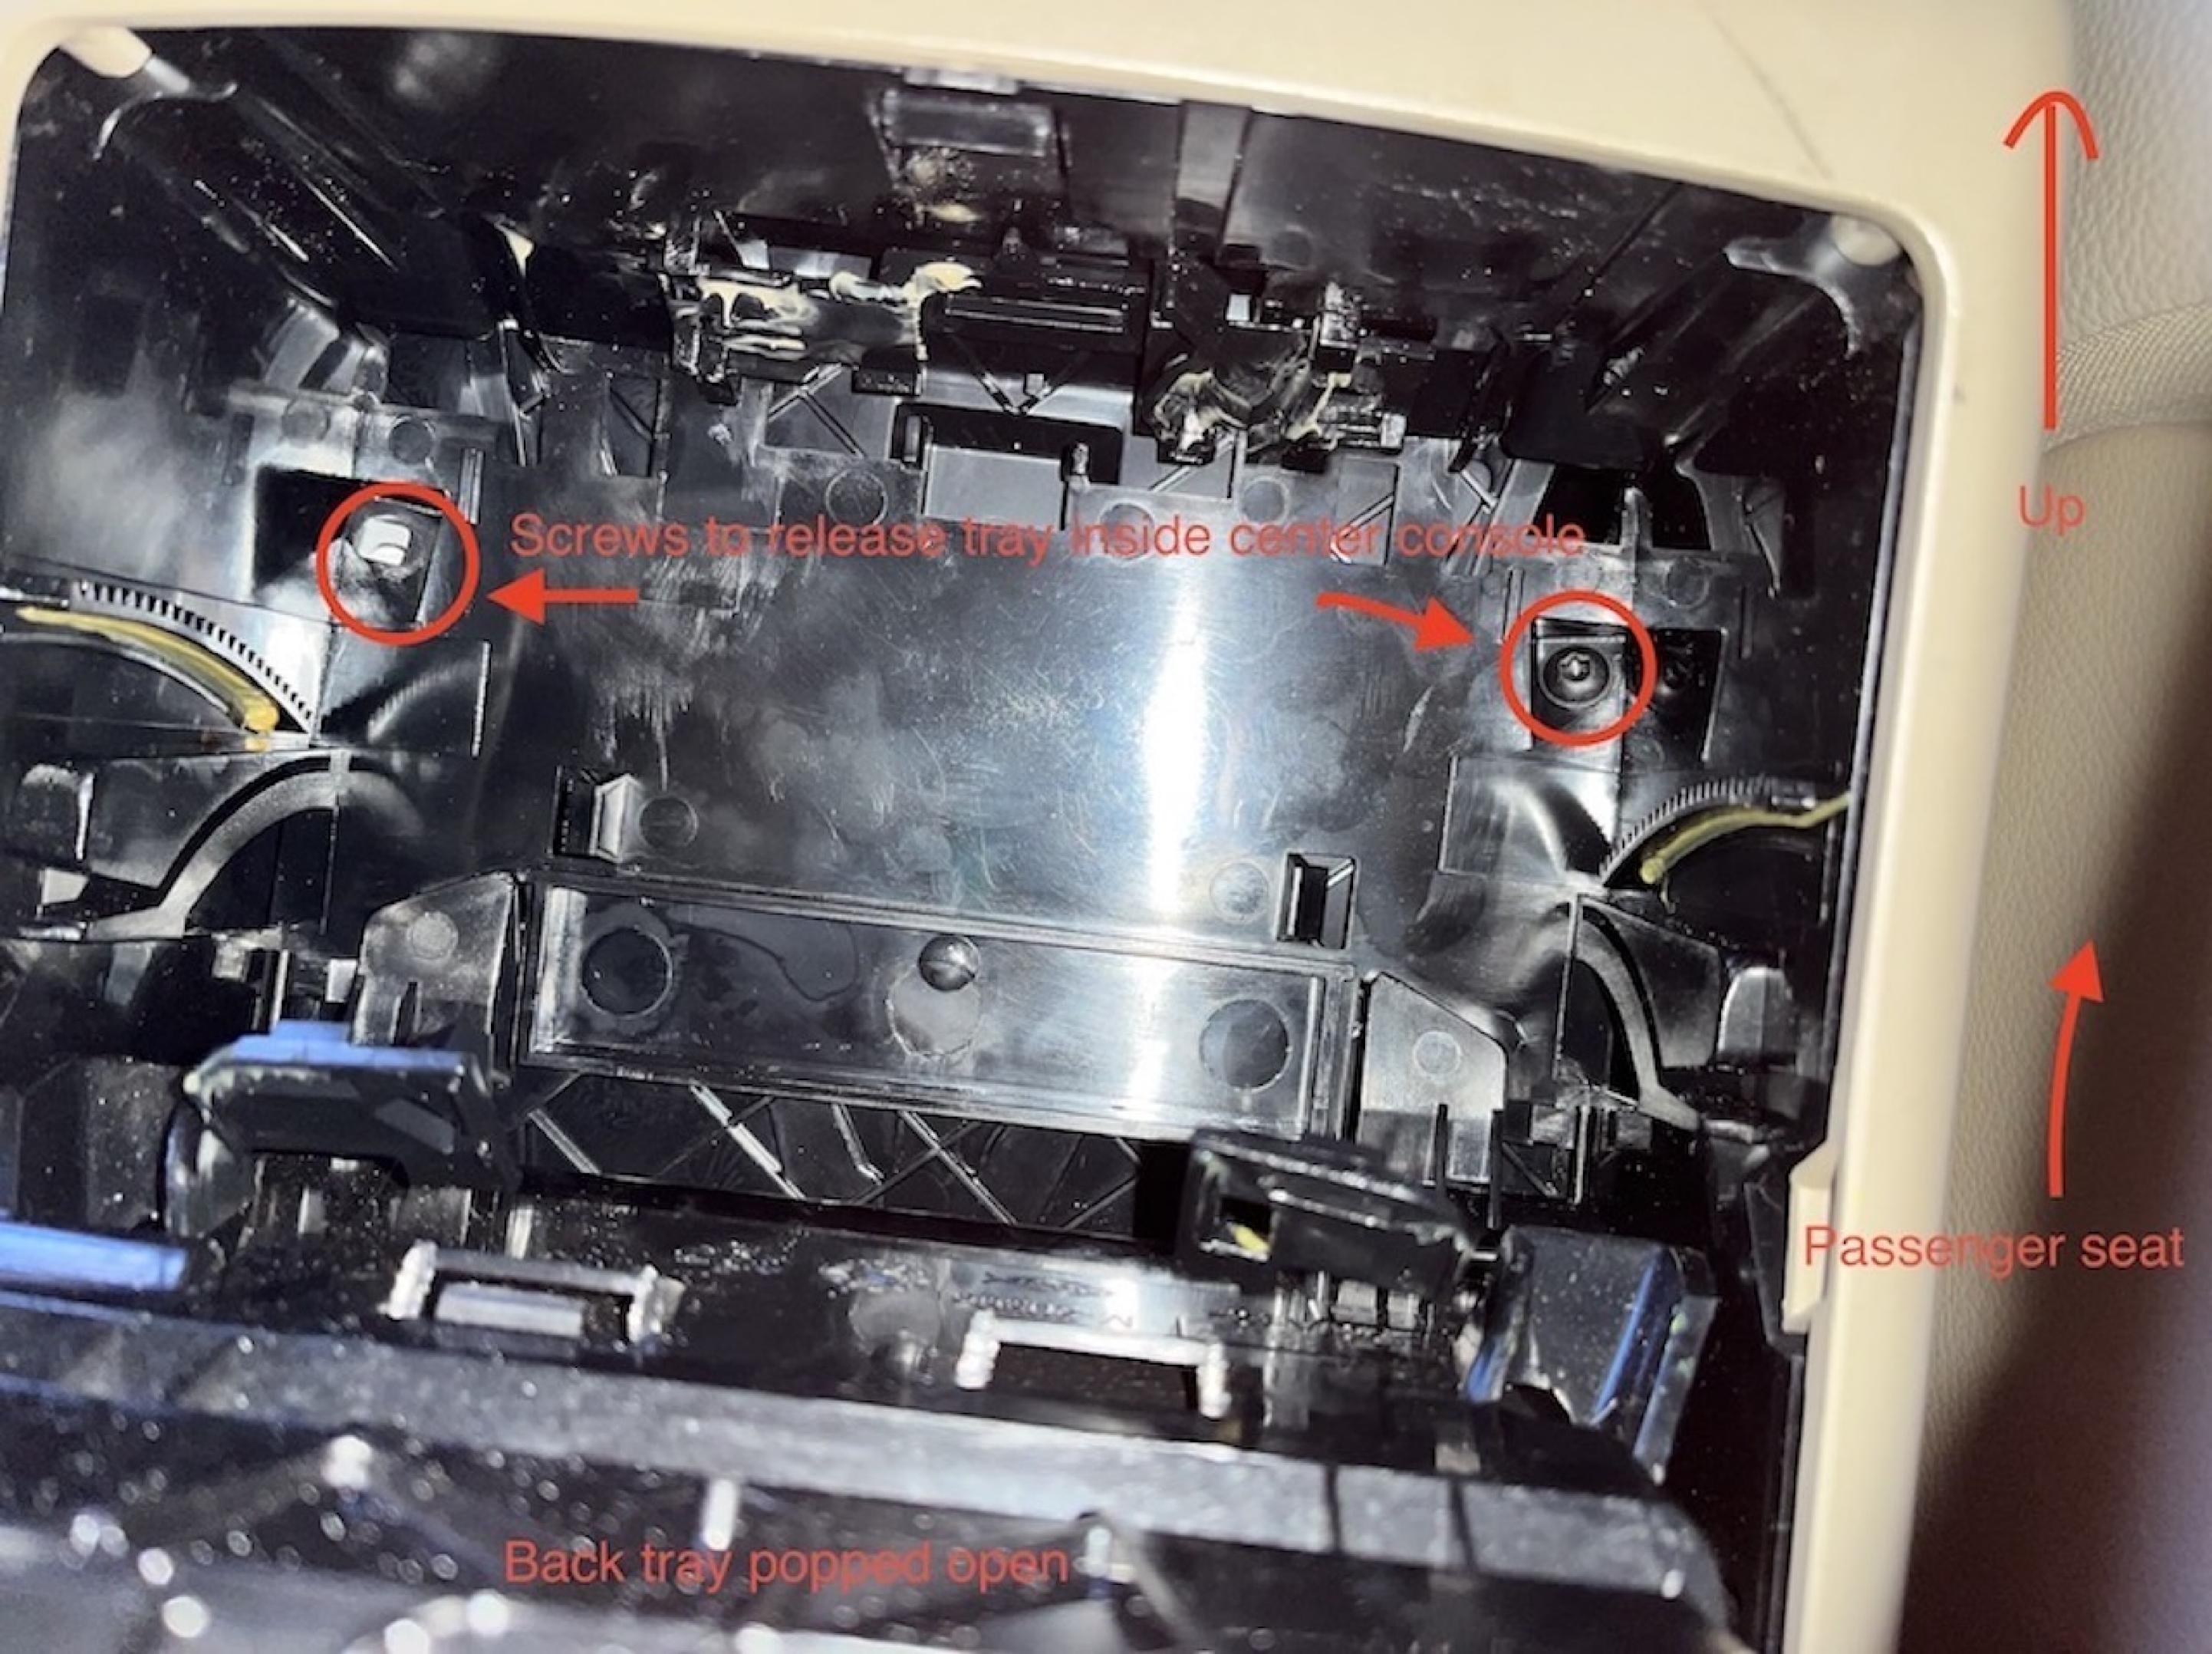


Screws to release tray inside center console

Up

Passenger seat


Back tray popped open

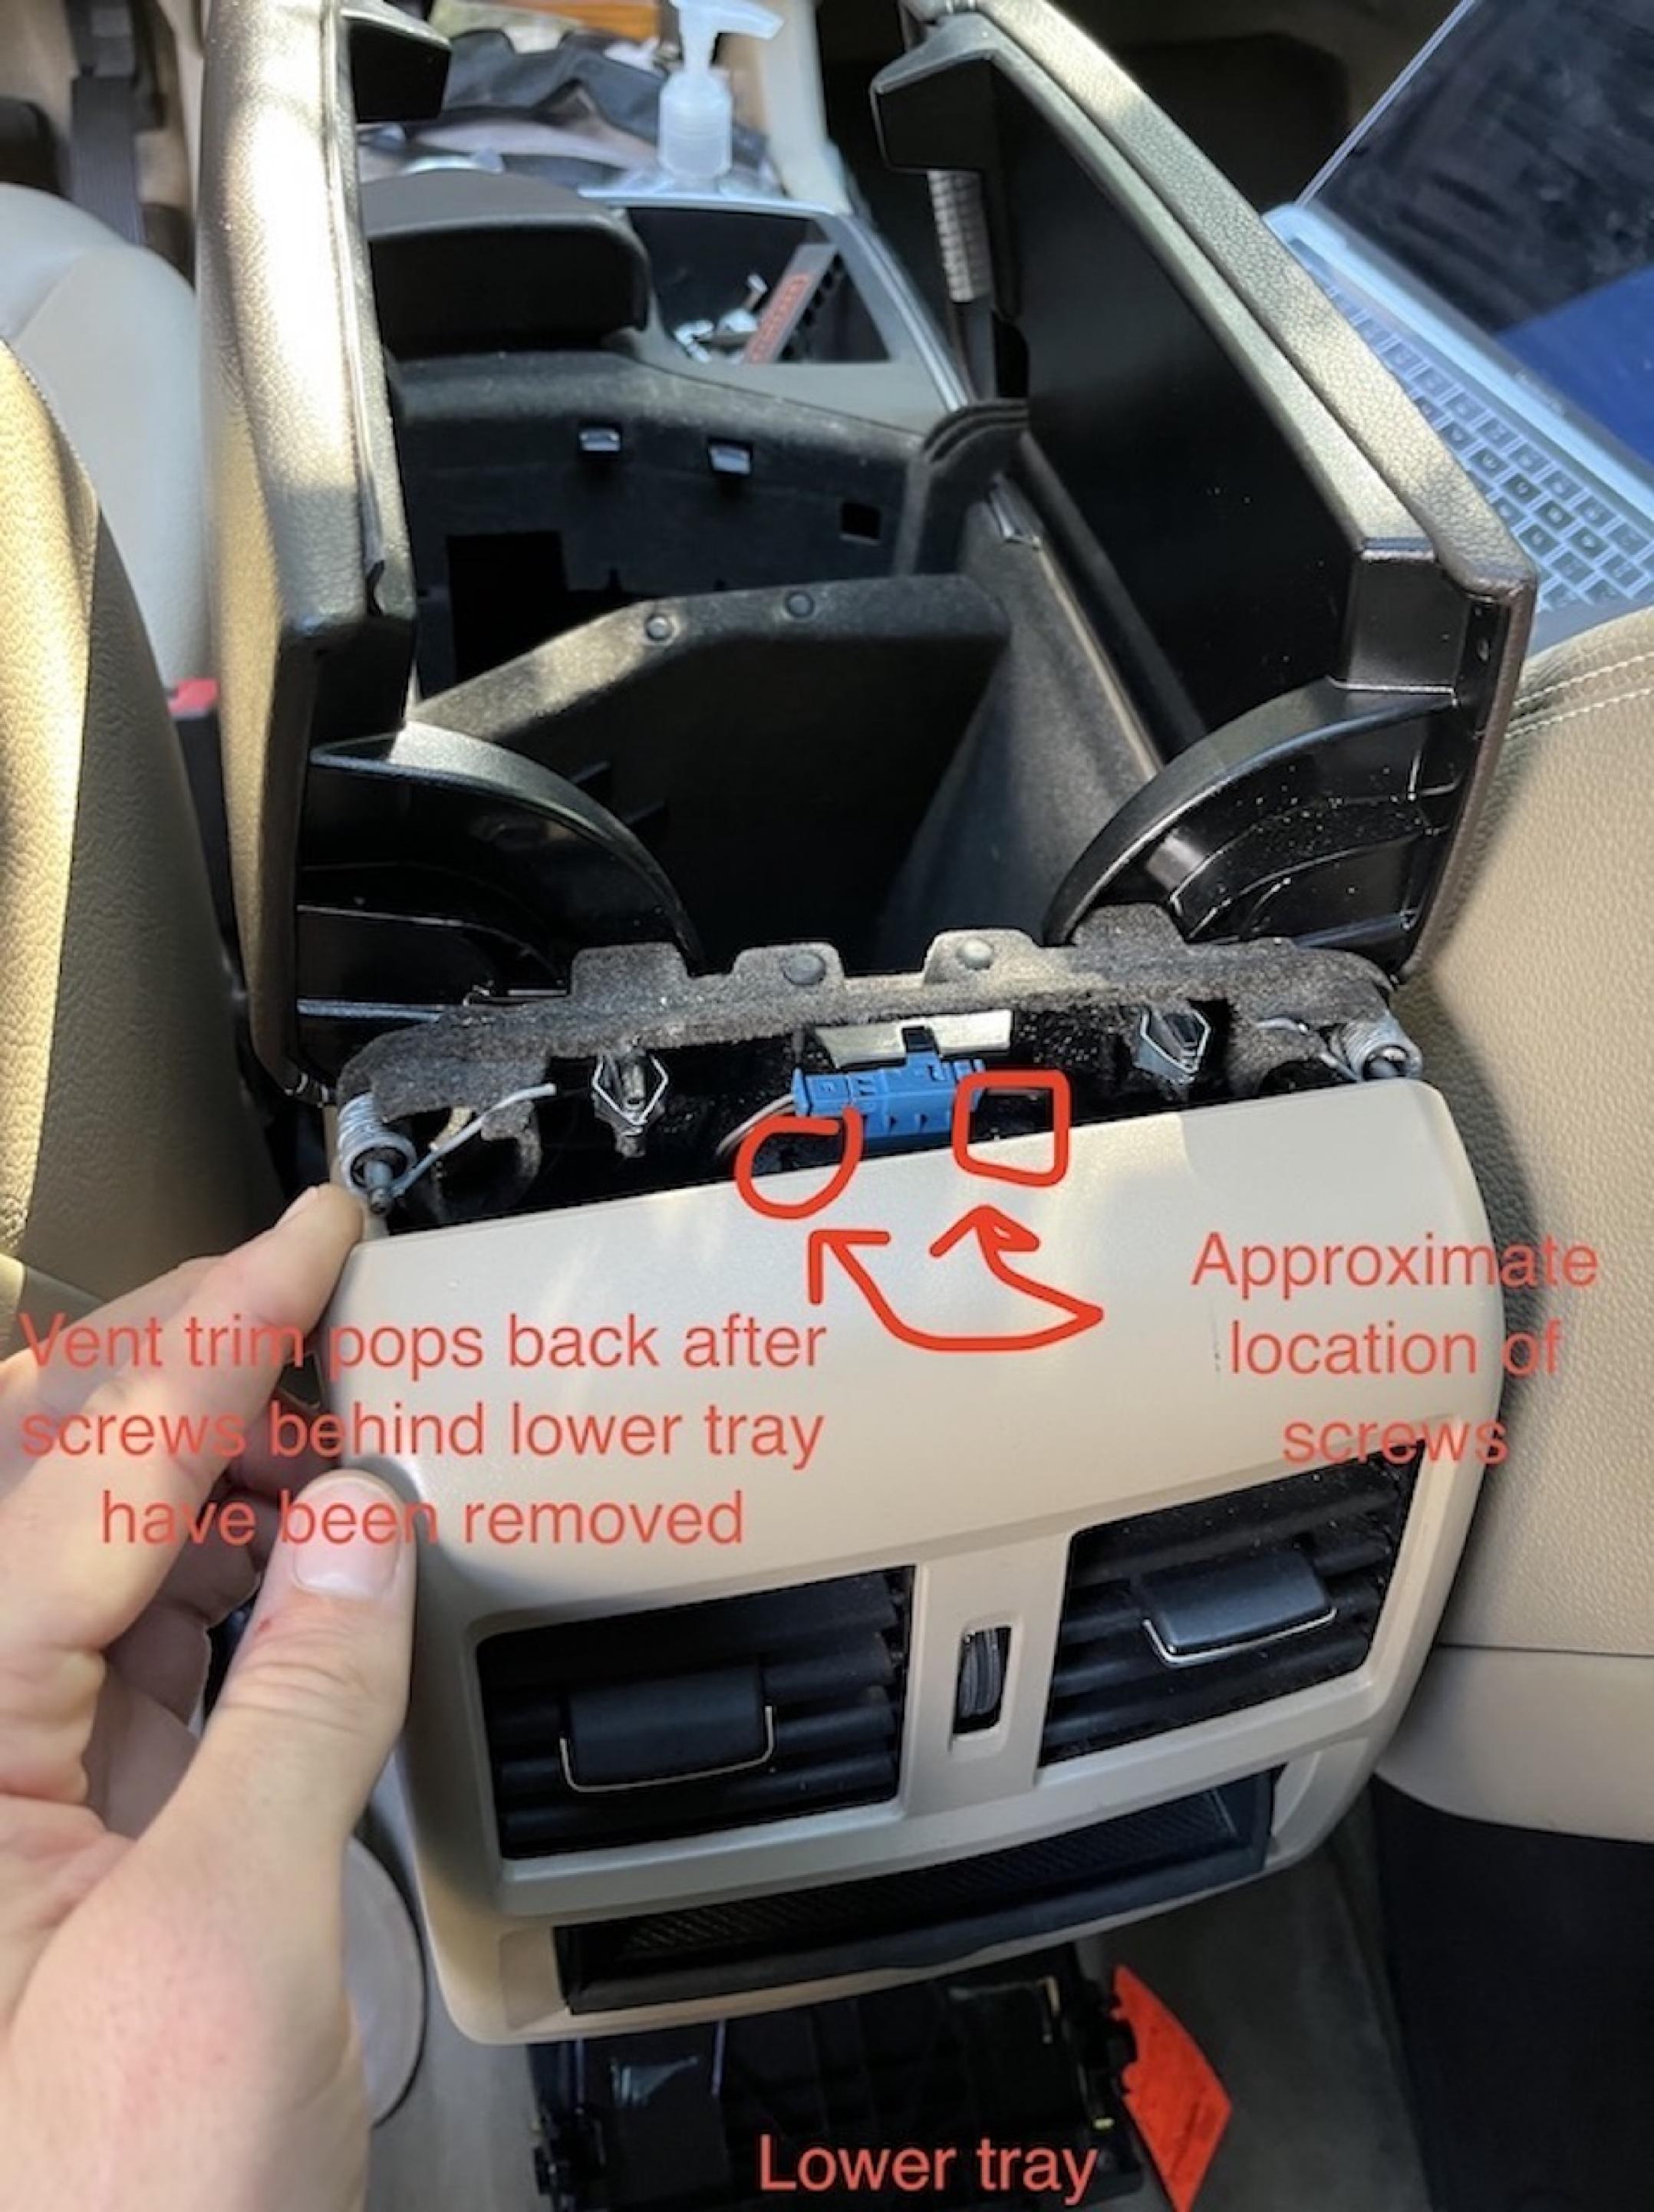

Vent trim pops back after screws behind lower tray have been removed

Approximate location of screws

Lower tray

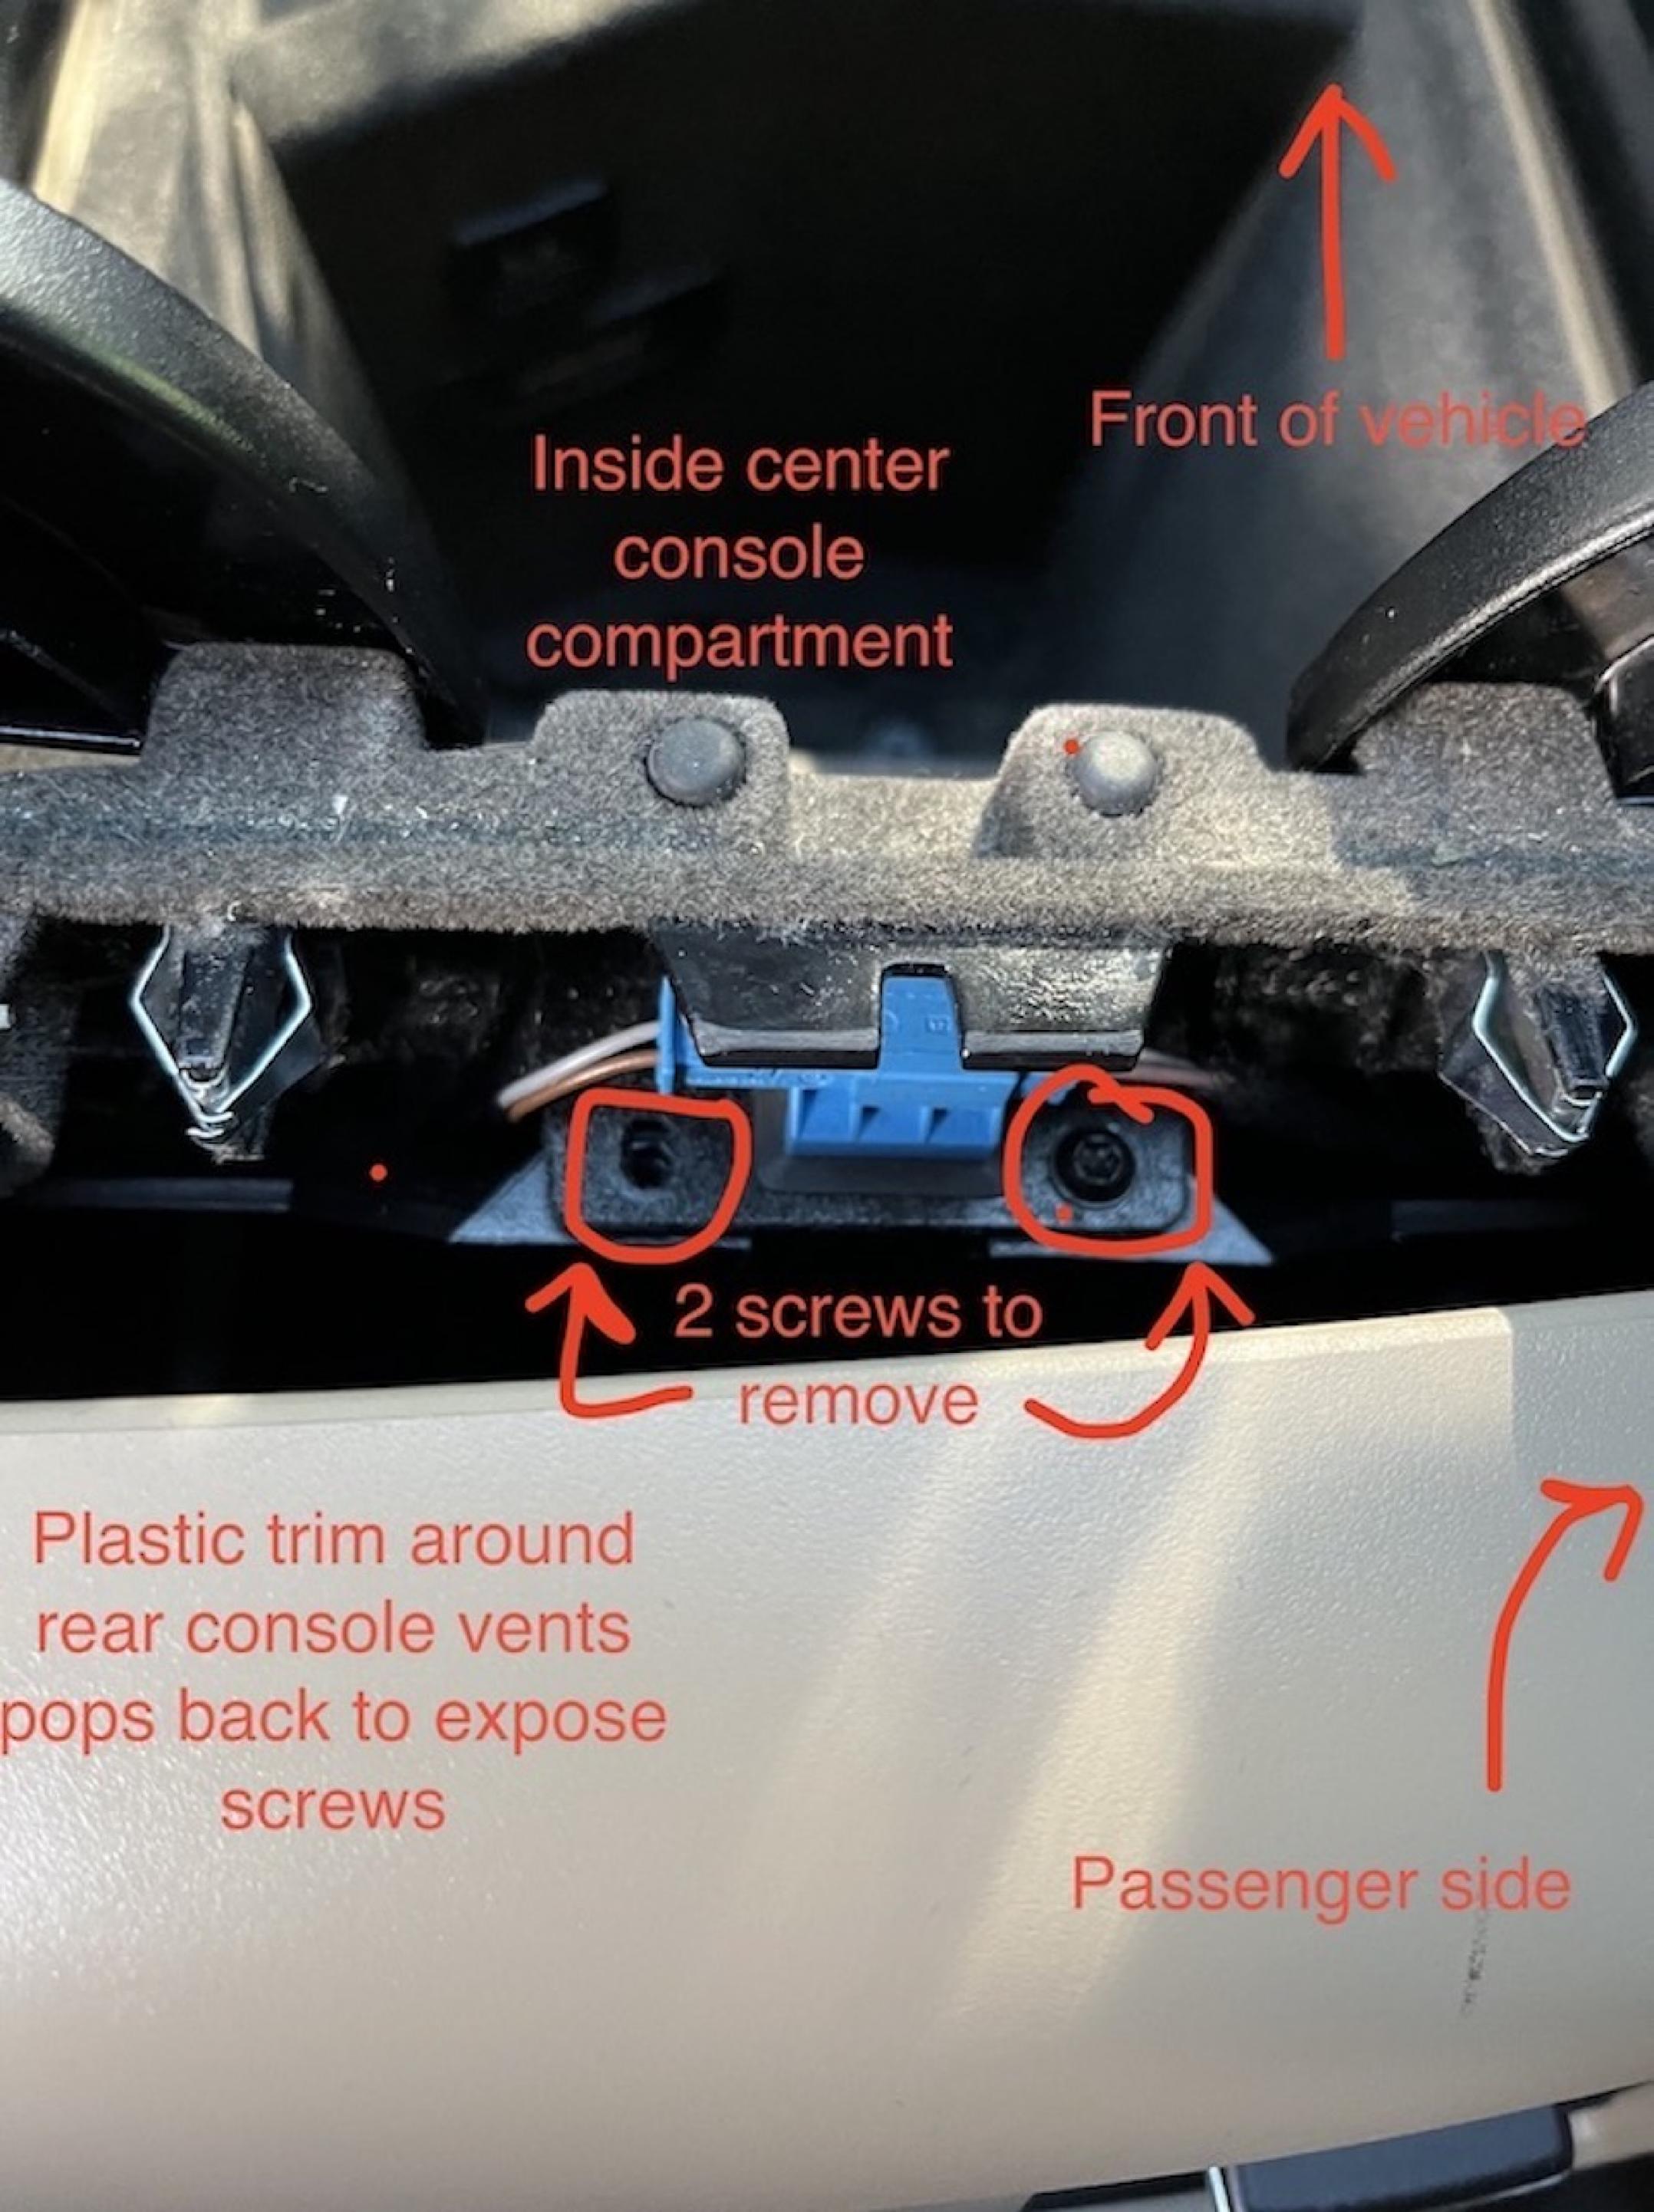

Front of vehicle

Inside center console compartment

2 screws to remove

Plastic trim around rear console vents pops back to expose screws

Passenger side