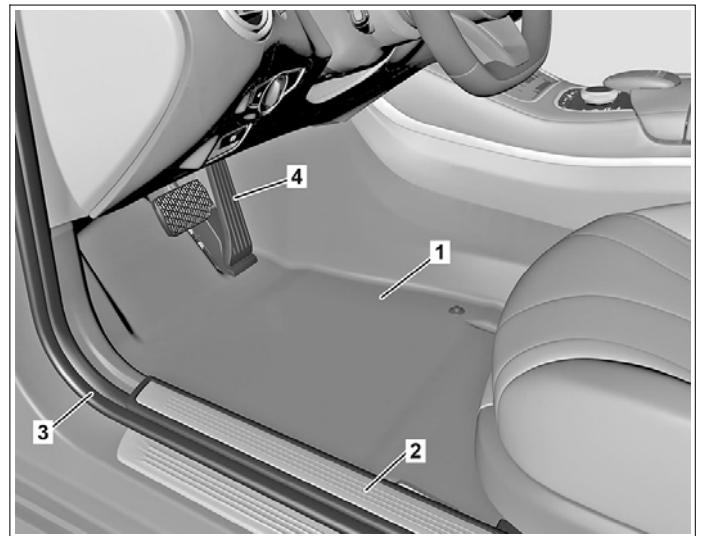









MODEL 217

- 1 Floor covering
- 2 Door sill
- 3 Edge guard
- 4 Accelerator pedal



P68.20-4790-11

 	Remove/install		
1	Adjust steering column toward rear and completely upward		
2	Unscrew bolts on guide rails from left front seat		AR91.10-P-1000LF
3	Move left front seat all the way back		
4	Switch off ignition and remove transmitter key		
5	Remove cover below left of instrument panel		AR68.10-P-1500LF
6	Remove accelerator pedal (4)		AR30.12-P-1321LF
7	Remove left door sill (2)		AR68.30-P-4100LC
8	Remove edge guard (3) in area of floor covering (1) on left		
9	Tilt left front seat toward rear and secure		
10	Remove floor covering (1)	<p> Use  assembly wedge in center console area.</p> <p> Installation: Position floor covering (1) below center console.</p> <p> Mounting wedge</p>	*110589035900
11	Install in the reverse order		



110 589 03 59 00

Mounting wedge