


Model 217

- 1 Fender liner
- 2 Expansion rivet
- 3 Nuts
- 4 Rivets

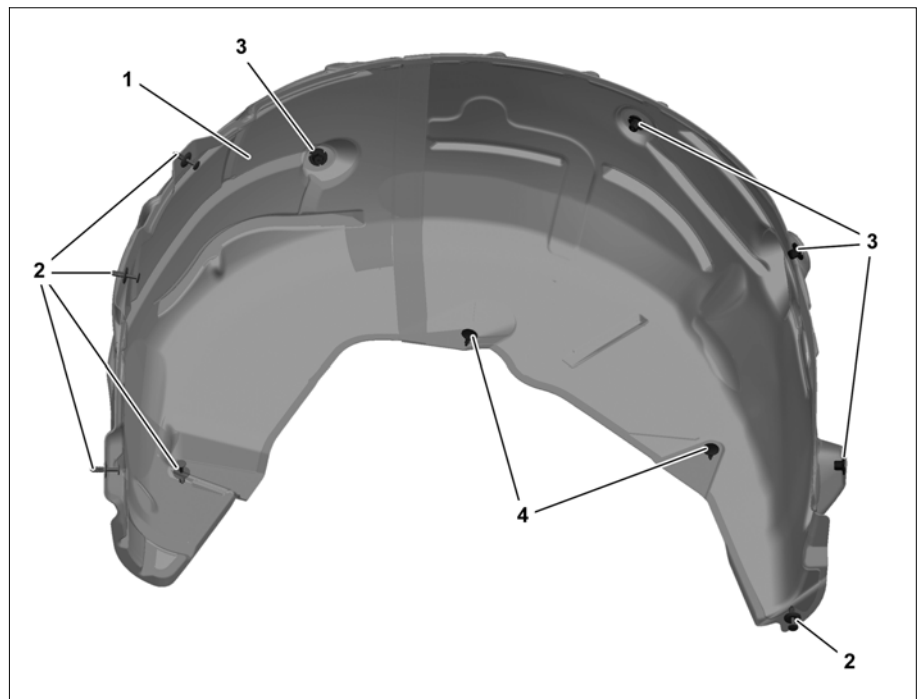

P88.10-A006-06

☒ ☒	Remove/install		
1	Remove rear wheel.		AR40.10-P-1102A
2	Remove expansion rivets (2).		
3	Remove nuts (3).		
4	Remove rivets (4).		
5	Pull outer edge of the fender liner (1) out of the wheel arch lip and remove fender liner (1) downward.		
6	Install in the reverse order.		