
Remove paneling in trunk


Model 217.3

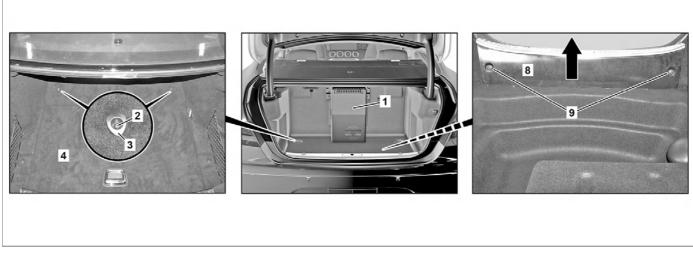

P68.30-3765-08

- 1 Refrigeration compartment
- 2 Bolts
- 3 Bracket

- 4 Trunk floor
- 8 Rear trunk paneling
- 9 Retaining clips

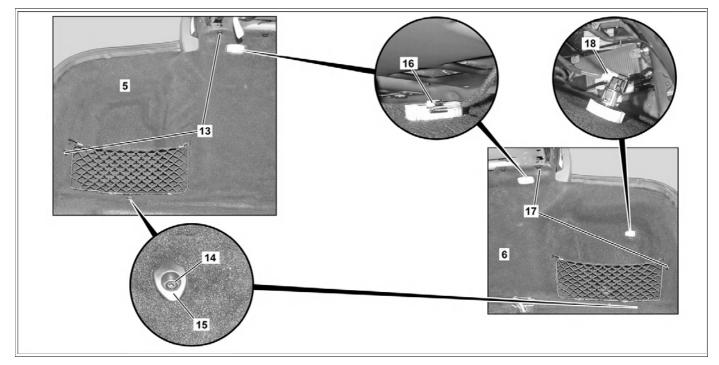


P68.30-3766-09

- 5 Left luggage compartment paneling
- 6 Right luggage compartment paneling
- 13 Retaining clips
- 14 Screw

- 15 Bracket
- 16 Electrical connector
- 17 Retaining clips
- 18 Electrical connector

- Front trunk paneling Retaining clips Bolts 7
- 10
- 11
- 12 Cover
- Lower trunk paneling 19
- 20 Retaining clips

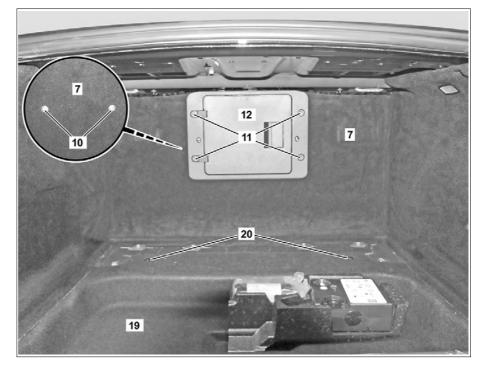

P68.30-3767-06

	Risk of injury . Moving parts can pinch, crush or, in extreme cases even sever extremities.	No parts of the body or limbs should be within the operating area of mechanical components when moving components.Model 217.3 with code P17 (KEYLESS-GO package)	
i	Notes on sensor system for trunk lid opening/ closing	Model 217.3 with code P17 (KEYLESS-GO package)	AH80.61-P-0001-01A
XX	Remove/install		
1	Remove refrigeration compartment (1)	Model 217.3 with code 308 (Refrigerated compartment)	AR86.61-P-1010LC
2	Unscrew bolts (2) from brackets (3)		
3	Remove trunk floor (4)		
4	Remove subwoofer	Model 217.3 with code 811 (Advanced sound system)	AR82.62-P-7841LC
5	Remove retaining clips (9) and unclip rear trunk paneling (8) upward		
6.1	Remove retaining clips (10)	Model 217.3 except code 282 (Ski and snowboard bag) except code 308 (Refrigerated compartment)	
6.2	Unscrew bolts (11) and remove cover (12)	Model 217.3 with code 282 (Ski and snowboard bag) Model 217.3 with code 308 (Refrigerated compartment)	
7	Remove front trunk paneling (7)	with code 506 (Reingerated compartment)	
8	Remove retaining clips (13)		
9	Unscrew bolt (14) from bracket (15) on left trunk paneling (5)		
10	Detach left trunk paneling (5) and disconnect electrical connector (16)		
11	Remove left trunk paneling (5)		
12	Remove retaining clips (17)		
13	Unscrew bolt (14) from bracket (15) on right trunk paneling (6)		
14	Detach right trunk paneling (6) and disconnect electrical connectors (16, 18)		
15	Remove right trunk trim (6)		
16	Remove vehicle tool insert		
17	Remove retaining clips (20)		
18	Remove lower trunk paneling (19)		
19	Install in the reverse order		