

Model 217


## Modification notes

18.07.2016

Mutter/Schraube Scharnierhebel an Kofferraumdeckel

Typ 217

BA88.50-P-1002-01E

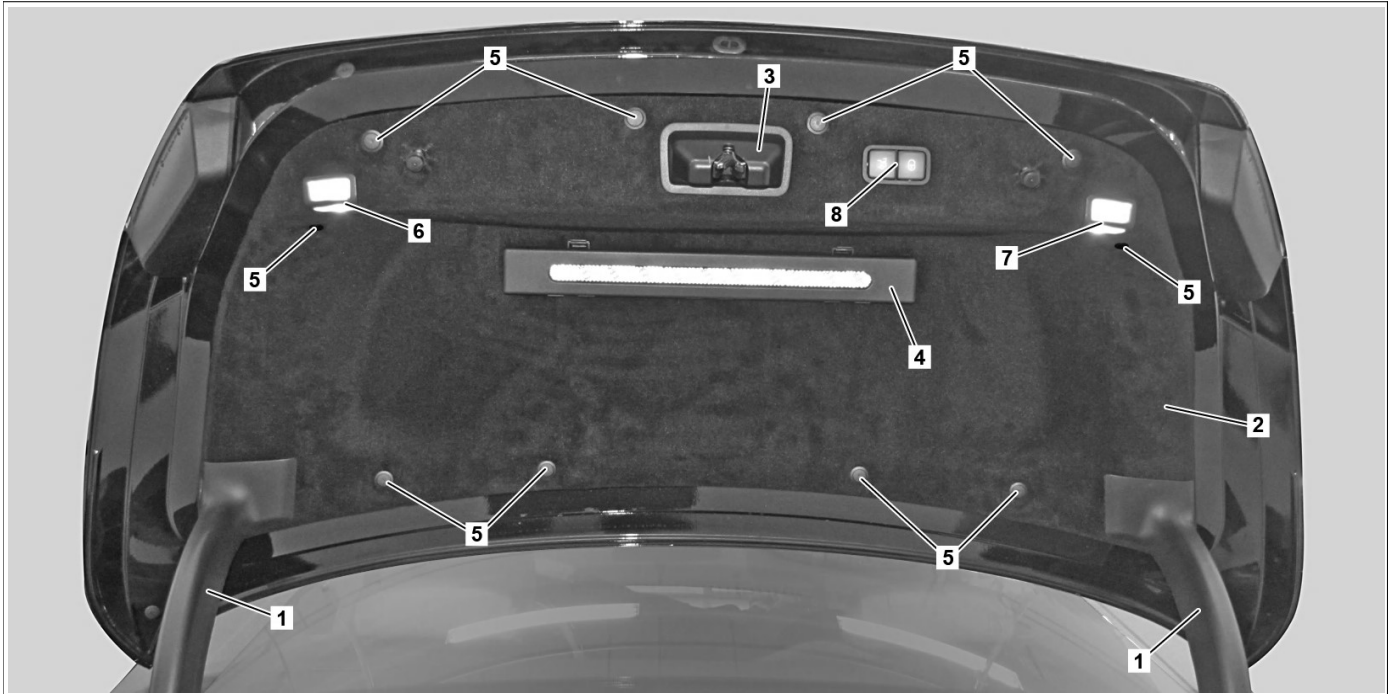


P88.50-3177-09

## Shown on model 217.3

- 1 Hinge bracket trim piece
- 2 Trunk lid lining
- 3 Cover
- 4 Hazard warning triangle bracket


- 5 Expanding rivets
- 6 Ambient lamp and left warning lamp
- 7 Ambient lamp and right warning lamp
- 8 Push button switch

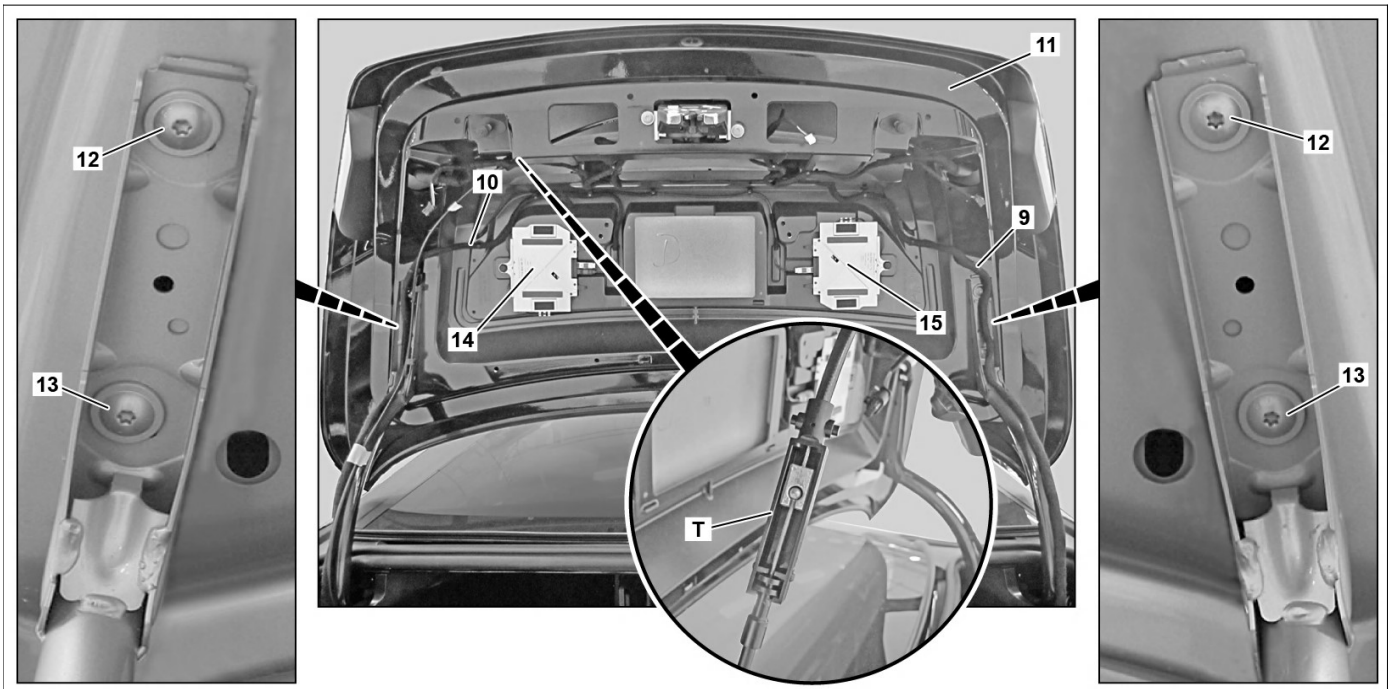

**Shown on model 217.3**

- 9 Electrical wiring harness
- 10 Electrical wiring harness
- 11 Trunk lid
- 12 Bolts

- 13 Bolts
- 14 Global navigation system antenna (GPS) and Global System Mobile (GSM)
- 15 Telephone antenna
- T Separation point

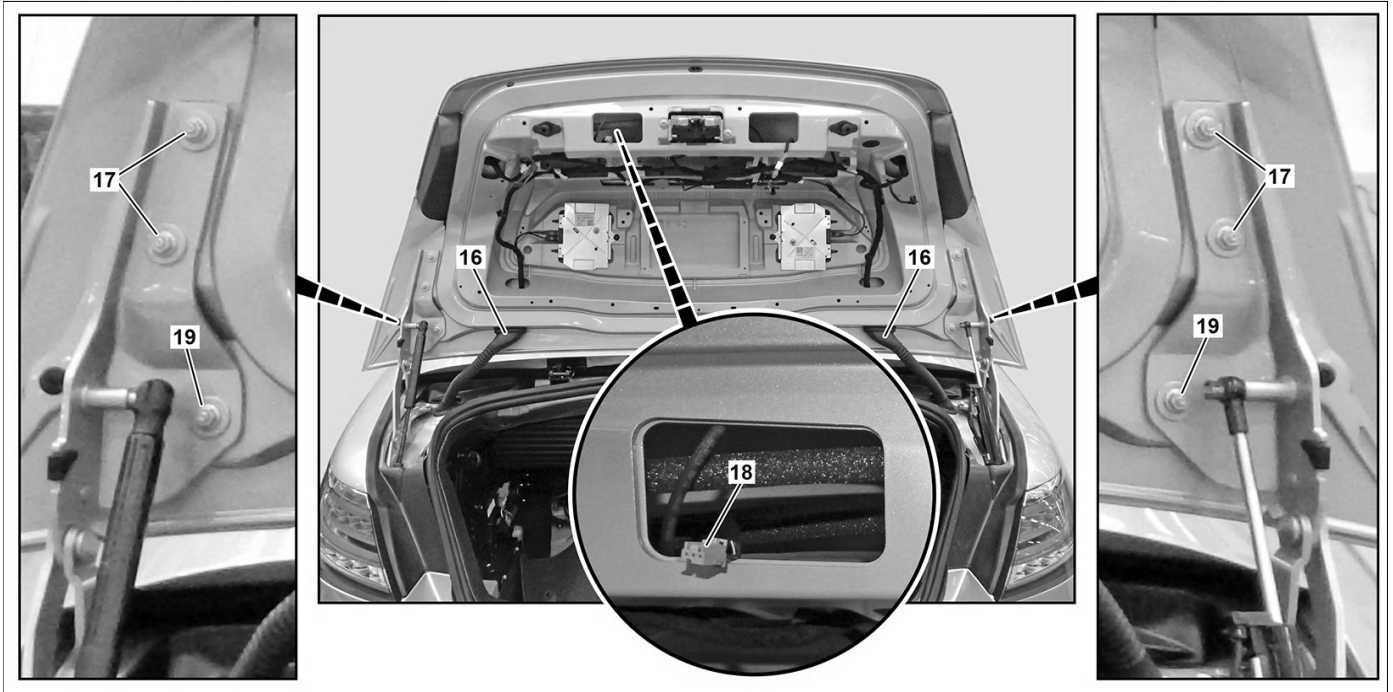

P88.50-3205-09

**Shown on model 217.4**

- 16 Wiring harness passage
- 17 Nuts

- 18 Electrical connector
- 19 Nuts

	<b>Danger !</b>	<b>Risk of injury</b> caused by fingers being jammed or pinched when removing, installing or aligning hoods, doors, trunk lid/rear-end door or sliding roof.	No parts of the body or limbs should be within the operating area when the components are moving.	AS00.00-Z-0011-01A
		Notes on sensor system for trunk lid opening/closing	Model 217 with code P17 (KEYLESS-GO package)	AH80.61-P-0001-01A
		<b>Remove/install</b>		
1		Loosen hinge bracket trim piece (1) from trunk lid paneling (2) and slide downward	Model 217.3	
2		Remove cover (3)		
3		Unclip hazard warning triangle bracket (4)		
4		Remove expansion rivets (5)	Clip remover	*452589016300
5		Unclip trunk lid paneling (2) and remove until electrical connectors are visible	Mounting wedge	*110589035900
6		Release electrical connectors from ambient lamp on left warning lamp (6), ambient lamp and right warning lamp (7) and pushbutton switch (8) and disconnect		
7		Release electrical connector (18) from remaining room partition pushbutton switch and disconnect	Model 217.4	
8		Remove trunk lid paneling (2)		<b>Installation:</b> Install trunk lid paneling (2) only after adjusting trunk lid (11).
9		Remove taillamps from trunk lid (11)		AR82.10-P-4915LC
10		Remove electrical wiring harnesses (9, 10) from trunk lid (11)		


11	Loosen wiring harness passages (16) from trunk lid (11) and pull electrical wiring harnesses (9, 10) out of trunk lid (11)	Model 217.4	
12	Separate cable for emergency release from connecting point (T)	Model 217.3	
13.1	Unscrew bolts (12, 13) and remove trunk lid (11)	Model 217.3 <b>i</b> <b>Installation:</b> Tighten bolts (12, 13) lightly by hand. <b>i</b> Helper required. <b>Nm</b> Nut/bolt, hinge lever to trunk lid	*BA88.50-P-1002-01E
13.2	Unscrew nuts (17, 19) and remove trunk lid (11)	Model 217.4 <b>i</b> <b>Installation:</b> Lightly tighten nuts (17, 19) by hand. <b>i</b> Helper required. <b>Nm</b> Nut/bolt, hinge lever to trunk lid	*BA88.50-P-1002-01E
14.1	Remove rear 360° camera	When replacing trunk lid (11). Model 217.4 with code 501 (360° camera) Model 217.3 with code 501 (360° camera)	AR54.65-P-0030LCA AR54.65-P-0030LC
14.2	Remove reversing camera	When replacing trunk lid (11). Model 217.4 except code 501 (360° camera) Model 217.3 except code 501 (360° camera)	AR54.65-P-0030LCA AR54.65-P-0030LC
15	Remove global navigation system antenna (GPS) and Global System Mobile (GSM) (14)	When replacing trunk lid (11).	AR82.85-P-0003LC
16	Remove telephone antenna (15)	Model 217 with code 386 (Comfort telephony) When replacing trunk lid (11).	AR82.62-P-0011LC
17	Remove SDARS antenna	Model 217 with code 460 (Canada version) with code 536 (SIRIUS satellite radio) Model 217 with code 494 (US version) with code 536 (SIRIUS satellite radio) When replacing trunk lid (11).	
18	Remove rotary tumbler	When replacing trunk lid (11). <b>Nm</b> M6	*BA00.10-P-1002-01A
19	Remove stop plug	When replacing trunk lid (11).	
20	Unscrew end stop for fine height adjustment	When replacing trunk lid (11).	
21	Install in the reverse order		
22	Adjust trunk lid (11)		AR88.50-P-5200LF

**Nm** Headless screws: bolts and nuts, coarse-pitch thread

Number	Designation	Model all
BA00.10-P-1002-01A	M6	8.8 Galvanized Nm 9
		Phosphated Nm 9
	10.9	Galvanized Nm 13
		Phosphated Nm 12
		Galvanized Nm 16
		Phosphated Nm 14


**Nm** Trunk lid

Number	Designation	Model 217
BA88.50-P-1002-01E	Nut/bolt, hinge lever to trunk lid	Nm 9



452 589 01 63 00

Clip remover



110 589 03 59 00

Mounting wedge