

EUROPEAN HEADLIGHT COUPLER

US HEADLIGHT COUPLER

US TURN SIGNAL COUPLER

LEFT RIGHT

- 1 VACANT
- 2 BROWN
- 3 GREY/BLACK
- 4 WHITE/BLACK
- 5 YELLOW/BLACK
- 6 GREY/GREEN

LEFT

- 1 GREY/GREEN
- 2 BROWN
- 3 YELLOW/BLACK
- 4 BLACK/WHITE

RIGHT




- GREY/GREEN
- BROWN
- YELLOW
- WHITE

LEFT

- 1 BROWN
- 2 BLANK
- 3 WHITE/BLACK
- 4 GREY/BLACK

RIGHT

- BROWN
- BLANK
- GREEN/BLACK
- GREY/RED

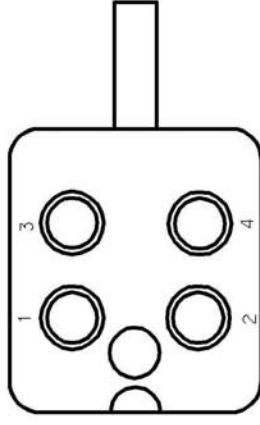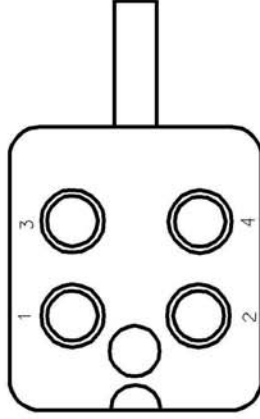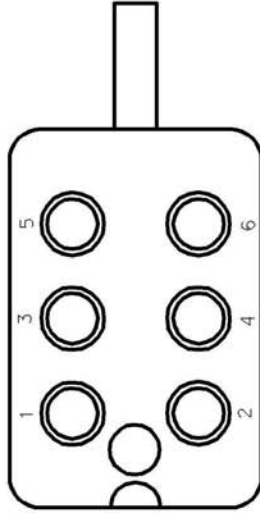

NOTE: PLUG IMAGE IS OF THE BOTTOM OR PLUG-IN SIDE. THE PLUGS HAVE THE NUMBERS EMBOSSED ON THAT SIDE.

CONNECTING THE CITY LIGHTS

Unplug the connector from the right or left turn signal. Using a flat screw driver, gently pry the edges to open the plug and expose the metal lugs. Pull out the lug from the #4 hole. It will have a Grey with Red stripe or Grey with Black stripe, same as the jumpers included with the kit. You may need to use a clamp or vise grips to gently hold the lug while soldering the same color coded jumper into it. Do not attempt to solder it with it in the plastic plug. Be sure to leave the original wire attached also. Replace the lug with the new jumper into the plug and re-assemble. Refer to the above diagram for wire locations in the new Euro plugs.

