


- MODEL 117, 156, 176, 204.3/9, 212, 218, 242, 246
- MODEL 204.0##/2## #A as of 213187
- MODEL 204.0##/2## #F as of 231783
- MODEL 204.0##/2## #R as of 048423
- MODEL 207.### ## as of 032555
- MODEL 216 as of 6/1/09
- MODEL 221 as of 6/1/09

Illustrated on model 204.9


- 1 Upper trim panel
- 2 Lower trim panel
- 3 Screw

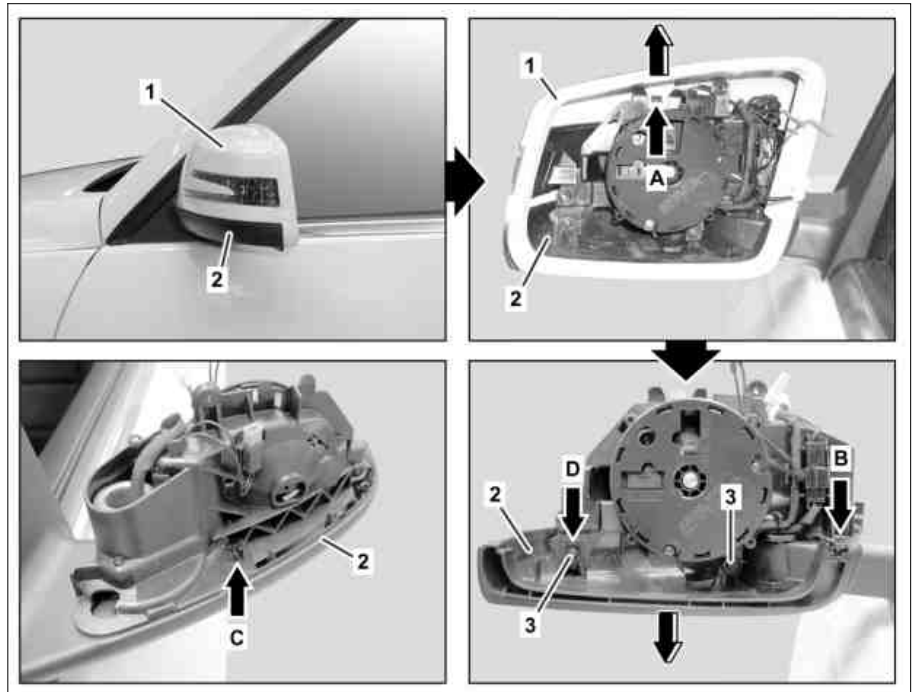

P88.70-2548-06


Shown on model 212

- 1 Upper trim panel
- 2 Lower trim panel
- 4 Electrical connector
- 5 Camera
- 6 Ambient lamp

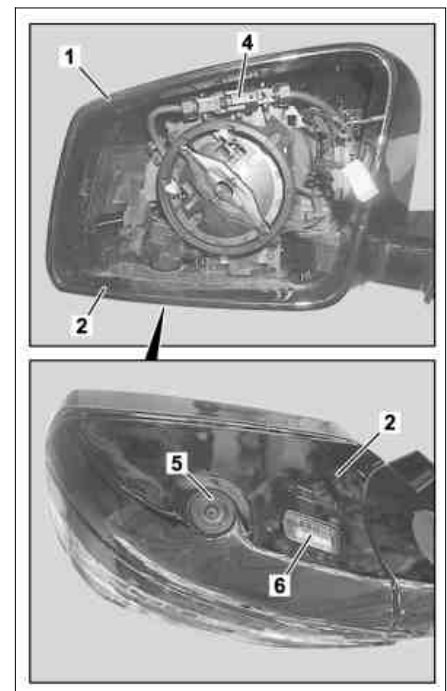

P88.70-2702-03

☒ ☒	Remove/install		
1	Remove mirror glass on left and right outside mirror	MODEL 117, 156, 176, 242, 246 MODEL 216 MODEL 221	AR88.70-P-9020NKB AR88.70-P-9020TX

		MODEL 204.0###/2## #A as of 213187 MODEL 204.0###/2## #F as of 231783 MODEL 204.0###/2## #R as of 048423 MODEL 204.3/9, 212, 218 MODEL 207.### ## as of 032555	AR88.70-P-9020CW
2	Unclip electrical connector (4) from upper paneling (1) and disconnect	MODEL 212 with CODE 501 (360 degree camera)	
3	Lift catch hook (arrow) and remove upper paneling (1) upward in direction of arrow		
4	Remove screws/bolts (3)		
5	Unlock catch hook (arrow B)		
6	Unlock catch hook (arrow C) and retaining bracket (arrow D) and remove lower paneling (2) downward in direction of arrow	If bottom paneling (2) is replaced ↓ Transfer camera (5) and ambient lamp (6) on left and right. Remove/install 360° camera in outside mirror MODEL 207 as of 6/1/13 as of model year 2014 with CODE 501 (360 degree camera) MODEL 212 as of model year 2014 with CODE 501 (360 degree camera)	AR54.30-P-3002ECM
7	Install in the reverse order		
8	Calibrate camera (5) with diagnostic system	MODEL 212 with CODE 501 (360 degree camera)	
 AD			AD00.00-P-2000-04A