



Shown on model 220

- 1 Wiper system
- 2 Water repellent piece
- 3 Air/water duct
- 4 Reed valve
- 5 Rod

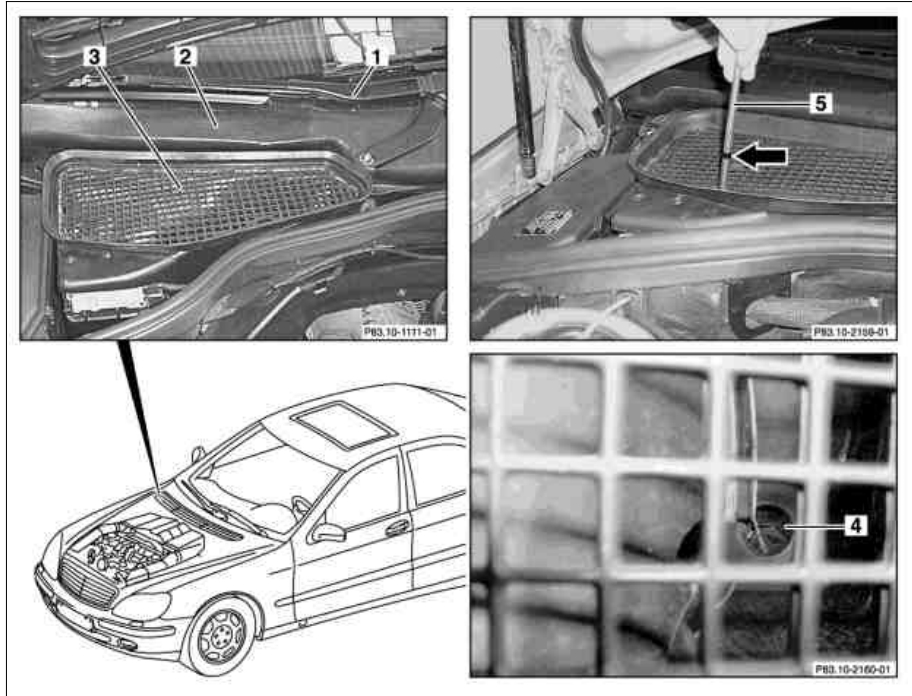

P83.10-2158-06

	Clean		
1	Clean reed valve (4) in air/water duct (3)	<p>➡ Guide rod (5) carefully into the reed valve (4), in order to avoid paint damage to the body below the reed valve (4).</p> <p><b>i</b> The rod (5) must have a diameter of 8 mm and a length of 500 mm. Round off the ends of the bar. Use wood, plastic or metal as material.</p> <p><b>i</b> Open bonded lamella of reed valve (4) and clean; to do this, insert rod (5) from above through the grid in the reed valve (4).</p>	