


MODEL 217, 222.0/1/9

Shown on model 222

- 1 Cover
- 2 Bolts
- 3 Electrical connector
- 4 AUX jack
- 5 Electrical connector

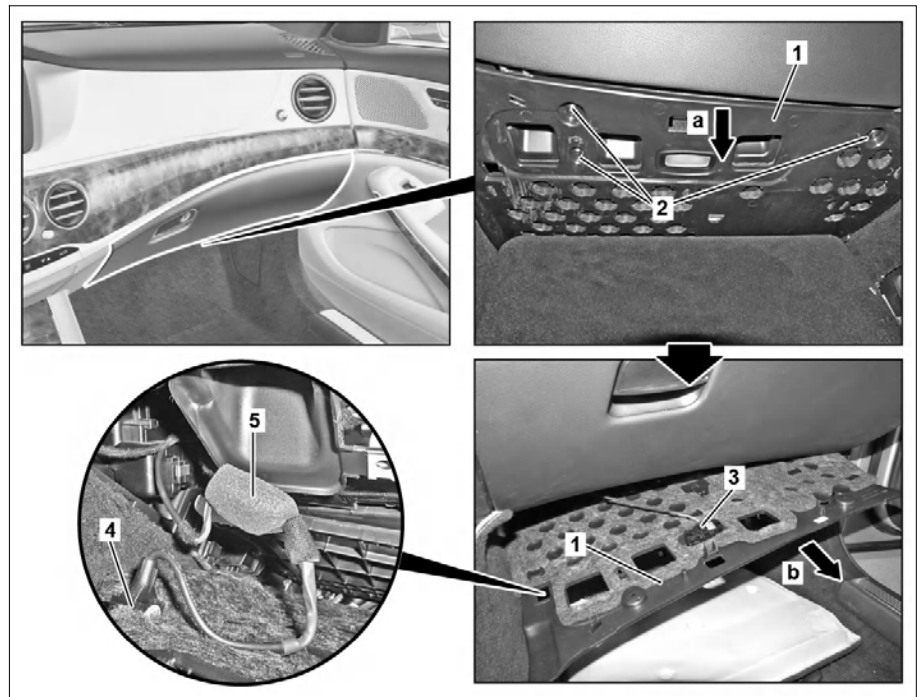

P68.20-4621-06

☒ ☒	Remove/install		
1	Move front passenger seat to end position toward rear		
2	Switch off ignition and remove transmitter key		
3	Remove bolts (2)		
4	Slide cover (1) downward in direction of arrow (arrow a) in front area and push opposite to direction of travel (arrow b)	<b>i</b> Lower cover (1) only until electrical connectors (3, 5) are accessible.	
5	Disconnect electrical connectors (3, 5)		
6	Remove cover (1) out of the footwell	<b>i</b> <b>Installation:</b> Position floor covering above cover (1).	
7	Transfer footwell lamp and AUX jack (4)	When replacing cover (1)	
8	Install in the reverse order		