



Model 222

- 1 Fender liner
- 2 Screw
- 3 Nuts
- 4 Expansion clip

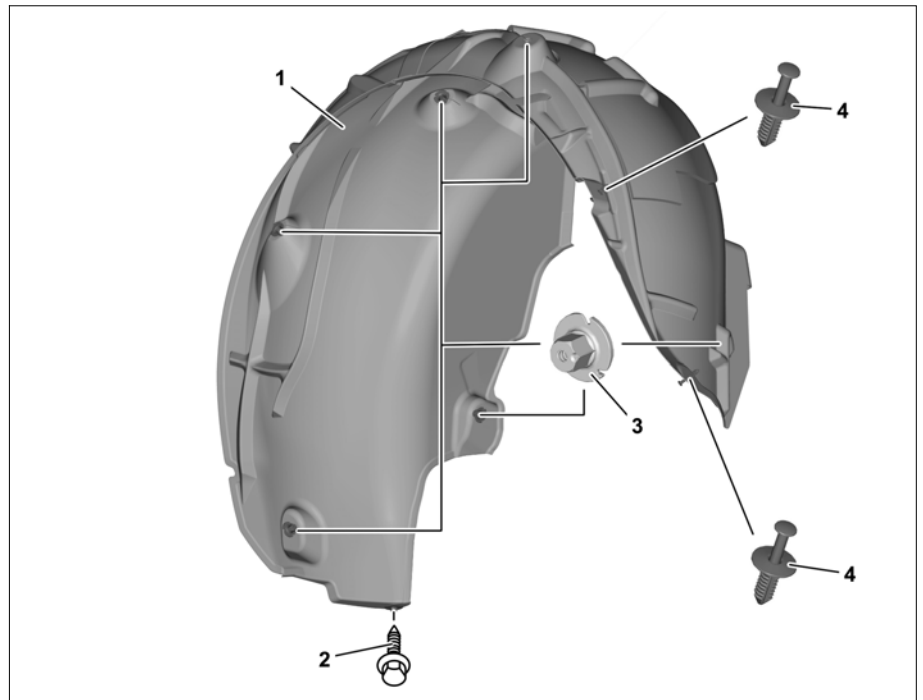

P88.10-2273-06

	<b>Risk of death</b> caused by vehicle slipping or toppling off of the lifting platform.	Align vehicle between vehicle lift columns and position the four support plates at the vehicle lift support points specified by the vehicle manufacturer.	AS00.00-Z-0010-01A
	<b>Remove/install</b>		
1	Lift vehicle on vehicle lift		
2	Unscrew bolt (2)		
3	Remove expansion clips (4)		
4	Unscrew nuts (3)		
5	Pull outer edge of fender liner (1) toward inside out of fender edge and remove fender liner (1) downward		
6	Install in the reverse order		