



MODEL 222.0/1/9
 with CODE 223 (Electrically adjustable rear bench seat)
 MODEL 222.0/1/9
 with CODE 224 (Rear individual seat design)

Shown on left side of vehicle

- 1 Seat backrest
- 2 Seat cushion
- 3 Center belt guide
- 4 Outer belt guide
- 5 Outer seat belt
- 6 Center seat belt

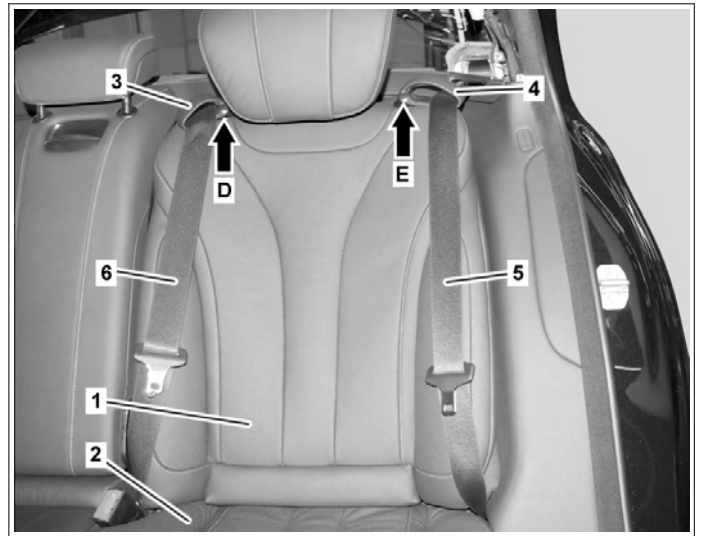


P91.12-3680-11

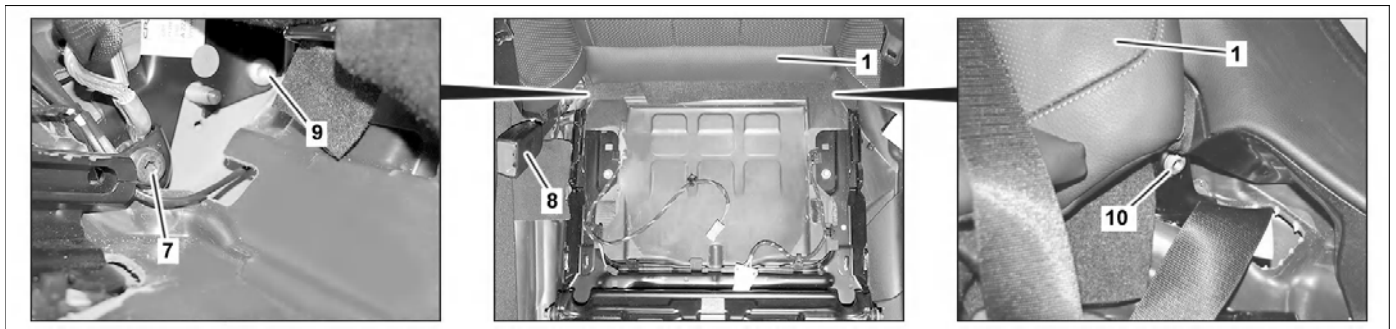

P91.12-3681-07

Shown on left side of vehicle



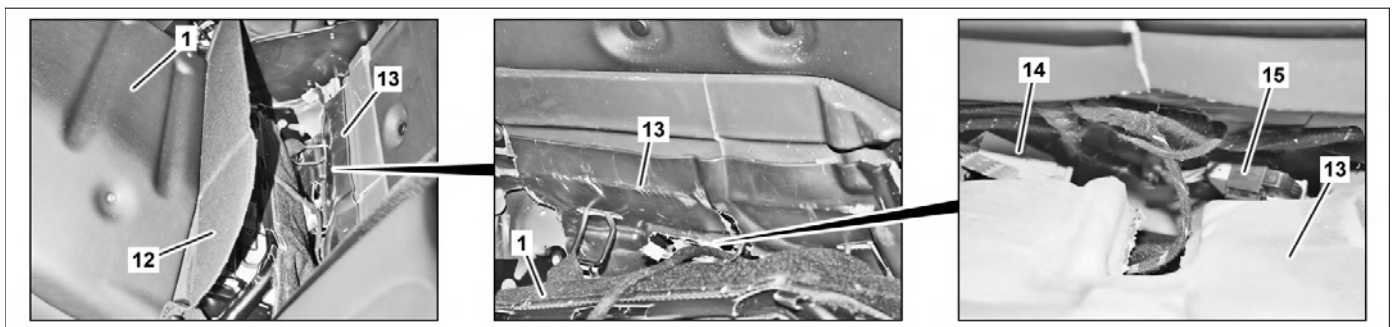






- 1 Seat backrest
- 7 Screw for belt buckle
- 8 Seat belt buckle
- 9 Screw
- 10 Screw



P91.12-3682-07

Shown on left side of vehicle

- 1 Seat backrest
- 12 Cover
- 13 Damping material
- 14 Electrical connector
- 15 Electrical connector

 	Remove/install		
1	Remove seat cushion (2)		AR91.12-P-1020LFA
2	Remove outer belt guide (4) from seat backrest (1) and place outer seat belt (5) to one side	 Press outer belt guide (4) in pivot point (arrow E) up to end stop in the backrest (1), then rotate through 90° to one side and pull upwards out of the backrest (1). Outer belt guide (4) remains on outer seat belt (5).	
3	Remove center belt guide (3) from backrest (1) and place center seat belt (6) to one side	When removing left backrest (1).  Press center belt guide (3) in pivot point (arrow D) up to end stop in backrest (1), then rotate through 90° to one side and remove upwards out of backrest (1). Center belt guide (3) remains on center seat belt (6).	
4	Remove belt buckle screw/bolt (7)	 Installation: Ensure that belt buckle (8) is seated correctly. Pay attention to the correct installation position of the center seat belt (6).  Bolt/nut for rear belt buckle	*BA91.40-P-1008-01T
5	Remove screw/bolts (9, 10)	 Bolt, backrest to body	*BA91.12-P-1003-03L
6	Fold backrest (1) forward		
7	Fold up cover (12)		
8	Fold over damping material (13)		
9	Disconnect electrical connectors (14, 15)	 The number of electrical connectors (14, 15) differs depending on the vehicle equipment.	
10	Remove backrest (1) from vehicle	 Carefully remove backrest (1) from vehicle. Otherwise components of the vehicle may be damaged.	
11	Install in the reverse order		

 Rear seats

Number	Designation		MODEL 222
BA91.12-P-1003-03L	Bolt, backrest to body	Nm	35

 Seat belts/emergency tensioning retractors

Number	Designation		MODEL 222
BA91.40-P-1008-01T	Bolt/nut for rear belt buckle	Nm	35