



Model 217, 222

Shown on model 222 up to model year 2017

1 Display module

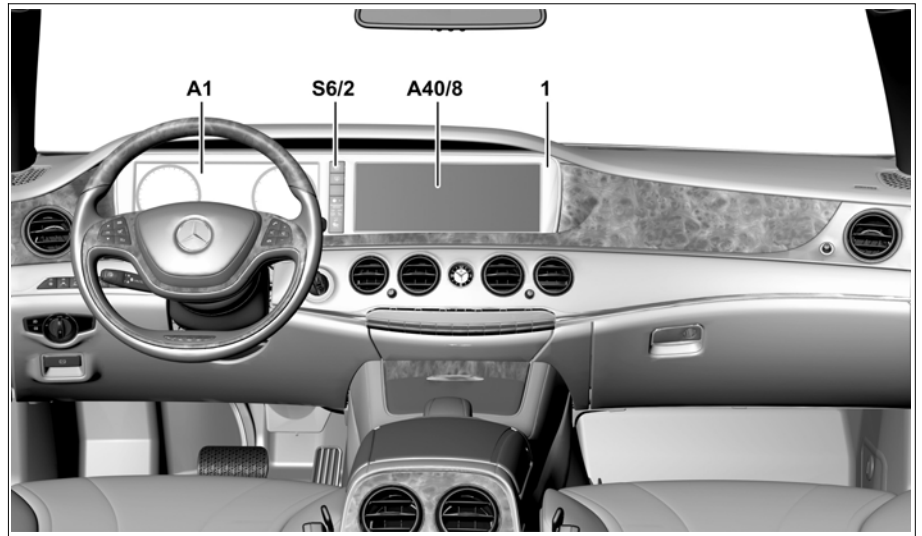

P54.33-2761-05

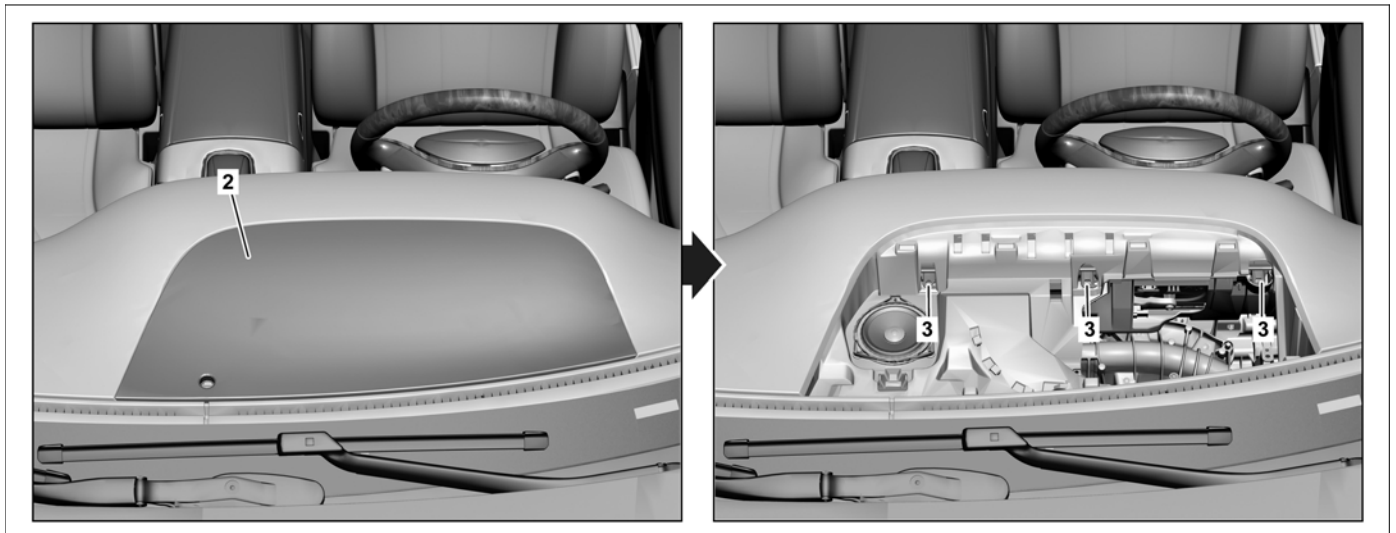


P54.33-2762-08

Shown on model 222 up to model year 2017 except code 463 (Head-up Display)

2 Center dashboard cover

3 Bolts

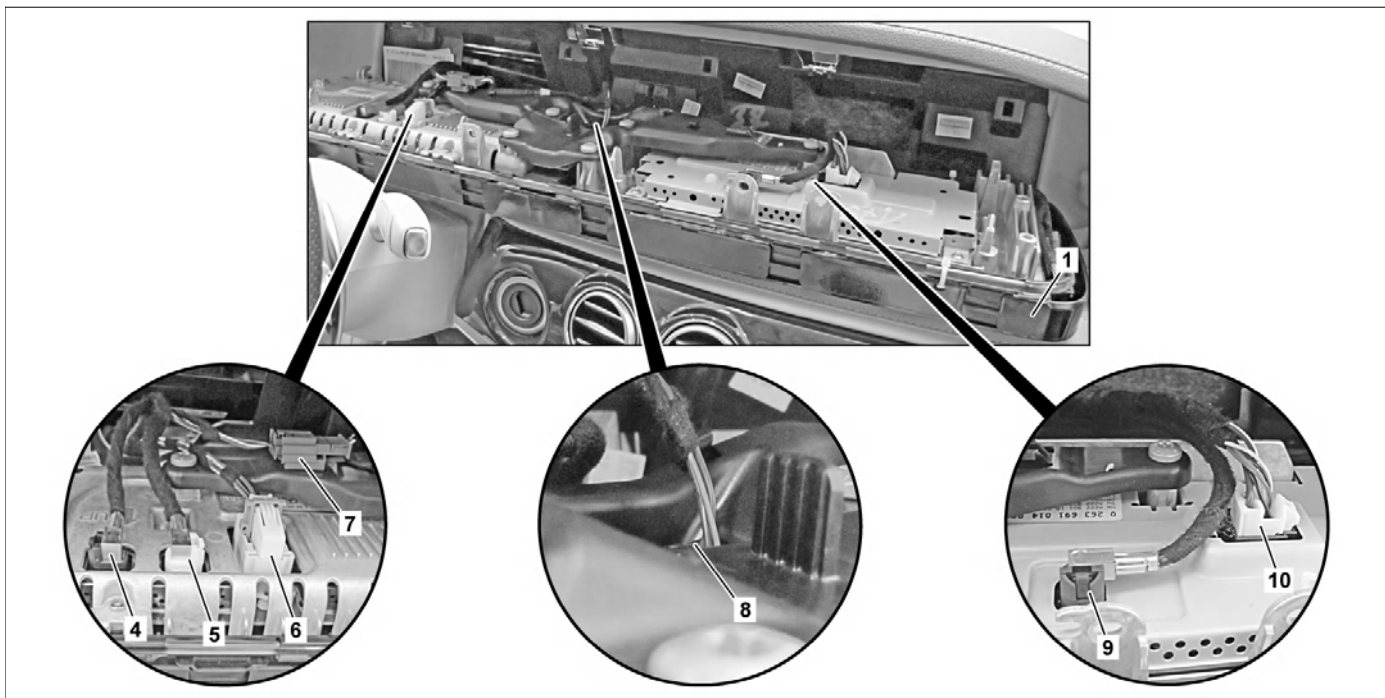

P54.33-4080-09

Shown on model 222 up to model year 2017

- |   |                      |    |                      |
|---|----------------------|----|----------------------|
| 1 | Display module       | 7  | Electrical connector |
| 4 | Electrical connector | 8  | Electrical connector |
| 5 | Electrical connector | 9  | Electrical connector |
| 6 | Electrical connector | 10 | Electrical connector |

	Notes on preventing damage to electronic components due to a magnetic tool		AH54.00-P-0002-01A
	Information on preventing damage to electronic components due to electrostatic discharge		AH54.00-P-0001-01A
	<b>Remove/install</b>		
1 	Connect vehicle diagnosis system and commission the display module (1)	Model 217, 222 as of model year 2017 When replacing the display module (1).  The instrument cluster (A1) can no longer be disconnected from the display module (1).	AD00.00-P-2000-04B
2	Remove center instrument panel cover (2)		AR68.10-P-3430LF
3	Remove soundproofing underneath center instrument panel cover (2)		
4	Remove bolts (3)	<b>Installation:</b> Push display module (1) forward and tighten bolts (3).	
5	Fold over display module (1) far enough until electrical connectors (4, 5, 6, 7, 8, 9, 10) are accessible	To do so, grip display module (1) at side and lift slightly to move it out of the catch hook at the top.	
6	Disconnect electrical connectors (4, 5, 6, 7, 8, 9, 10)		
7	Remove display module (1)		
8	Install in the reverse order		