


68-410	Removal and installation of molding above windshield
--------	--

Preliminary jobs:
Coupe roof removed (operating instructions).

Operation no. of operation texts and work units or standard texts and flat rates:

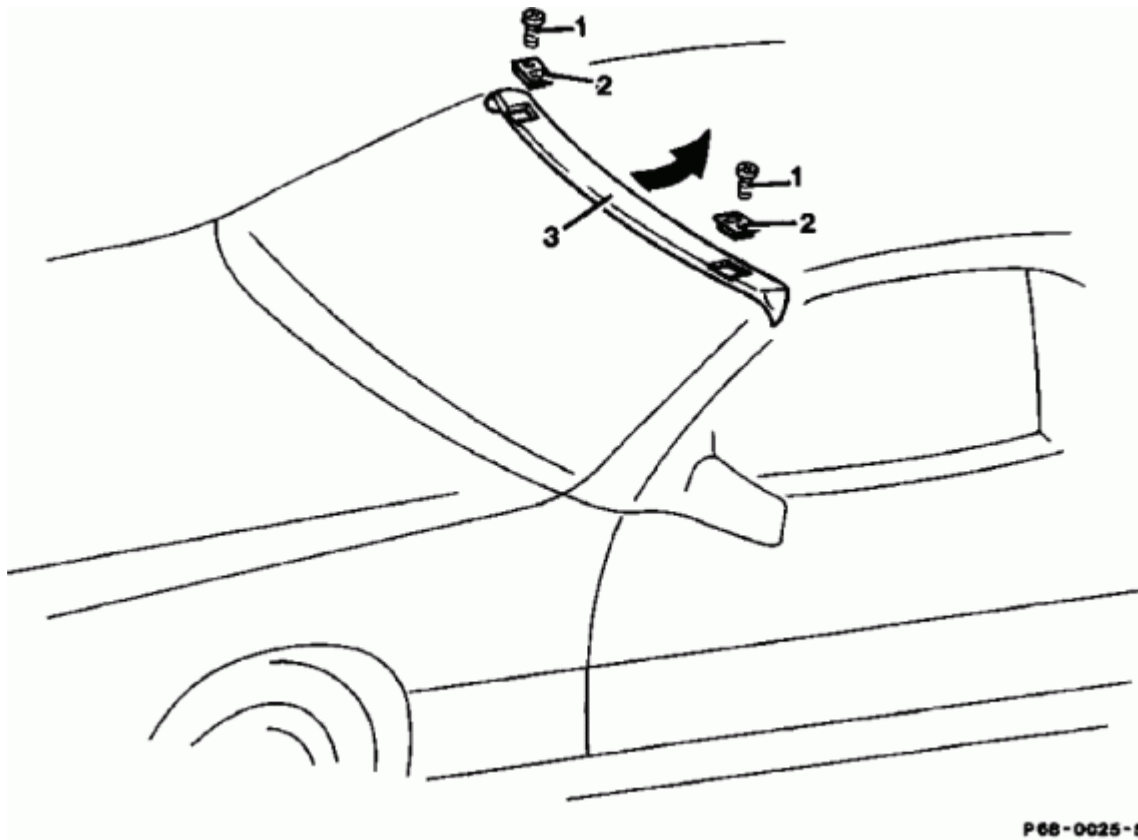

P68-0025-57
P68-0025-57

Screws (1, 2 each)	screw out.
Plug fittings (2, 2 each)	remove.
Cover (3)	pull off toward rear in longitudinal direction of vehicle.
	⚠ Reseal covering at left and right on front pillar at top.
Install in reverse order.	